

ASSEMBLY INSTRUCTIONS

Description: End Table





Important safety instructions:

- Please carefully read all instructions before assembling the table.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.







Pre-assembly:


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description		QTY
A	Left Side Frame		1
B	Right Side Frame		1
C	Top Panel		1
D	Stretcher		2


Hardware List

Item	Description		QTY
a	Bolts $\varnothing 1/4" \times 1-3/4"$		8
b	Lock Washers 1/4"		8
c	Flat Washers 1/4"(12mm)		4
d	Flat Washers 1/4"(19mm)		4
e	Allen Wrench 1/4"		1
f	Wooden Plugs		4

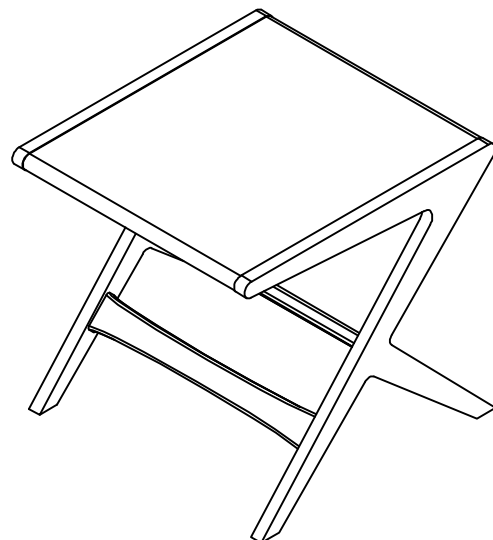


Assembly Procedures:


Step 1. Assemble the table on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the table top (C) to the left leg (A) according to the label "L" on the inside of left leg and the end of table top using bolts (a), lock washers (b) and flat washers (d) . Securely tighten the bolts by Allen wrench (e) .

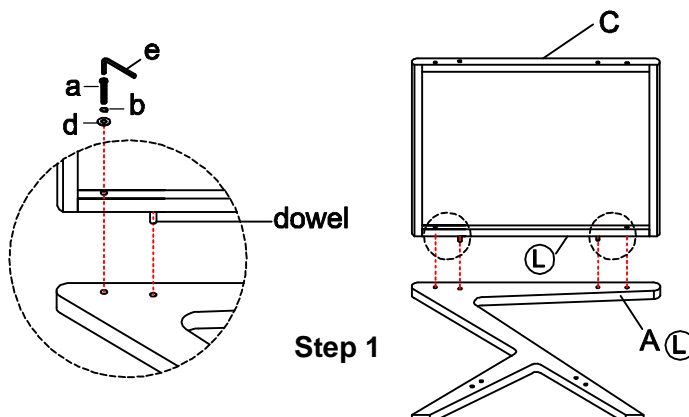

Step 2. Insert the two stretchers (D) between the inside of two legs (A & B). Then attach the table top (C) to the right leg (B) according to the label "R" on the inside of right leg and the end of table top using bolts (a), lock washers (b) and flat washers (d). Connect the two stretchers (D) to the leg frames (A & B) using bolts (a), lock washers (b) and flat washers (c). Securely tighten the bolts by Allen wrench (e).

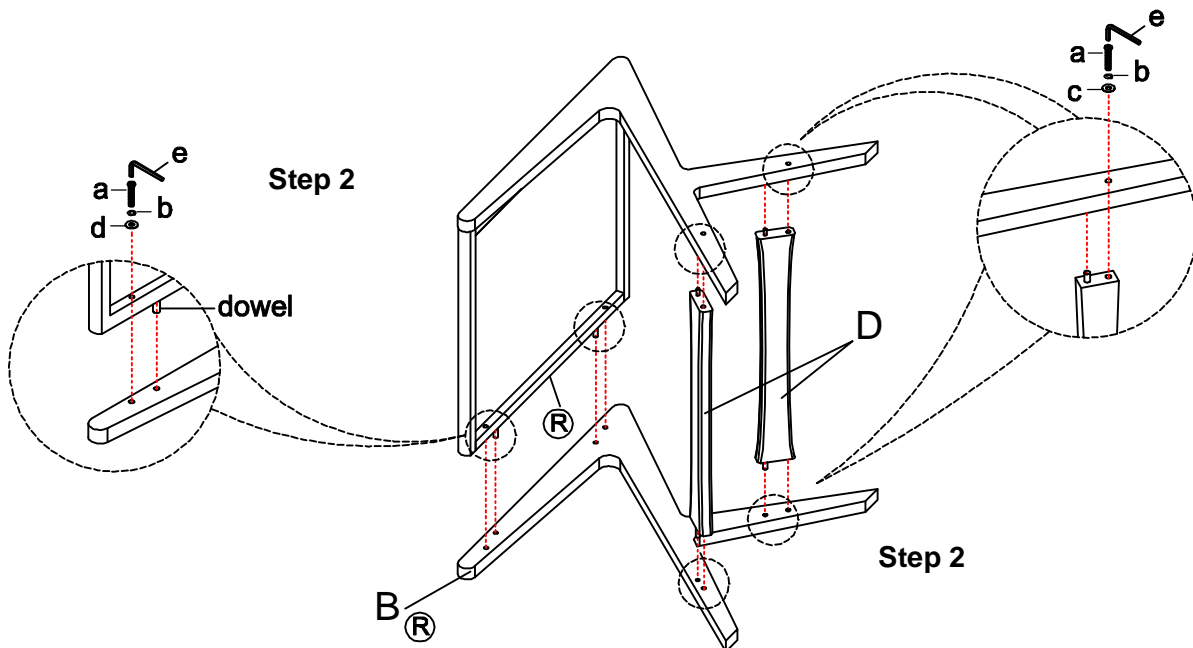

Step 3. Turn the assembled table to a upright position. Securely tighten all bolts by Allen wrench (e), but do not over tighten the bolts. Then attach wooden plugs (f) to each visible bolt hole, tighten with Rubber hammer to knock the wooden plugs till its tighten. Note: use a soft cloth between the wooden plug and hummer to prevent damage to wooden plug finish.

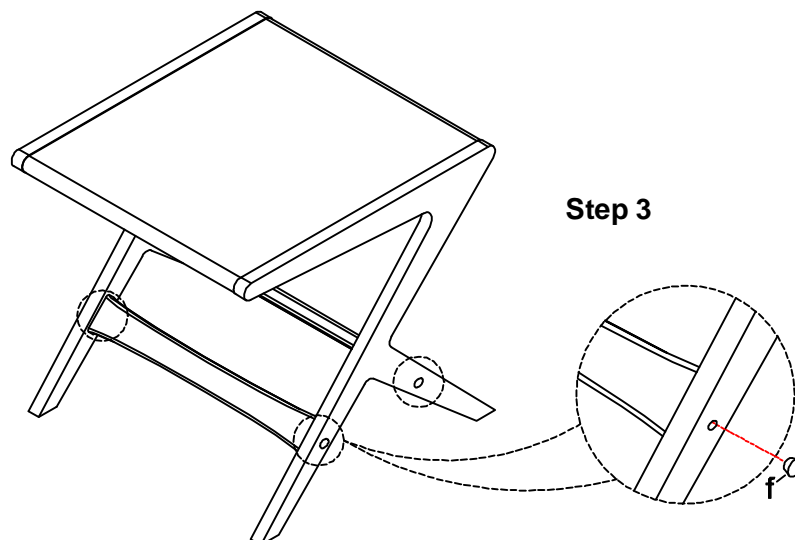

Step 4. Assembly are complete. Failure to follow these instructions may cause the bolts to misalign during assembly.

Thank you for your purchase