

Indoor 2-Outlet Daily Timer

Instruction Manual

Setting On/Off Periods

Timer can set up to 48 On/Off commands a day. Pull up all pins that correspond to desired "Off" time. For desired "On" time, make sure pins are pushed down. Each pin represents 30 minutes: 2 pins = 1 hour

Setting Time

Turn dial clockwise until triangular pointer is pointing at actual time. Be sure switch is set to TIMER ON.

Connection

Once desired On/Off times and actual time are set, plug timer into wall outlet, and plug lamp/device(s) into timer. Be sure wall outlet and lamp/device(s) are turned on. Timer will start to operate, turning lamp/device(s) On/Off according to pre-set commands.

Manual Override

Pre-set On/Off commands can be interrupted by using the manual override switch. When switched to OUTLET ON, connected lamp/device(s) are switched on permanently. To reactivate timer's control, turn lamp/device(s) switch on and set timer's override switch to TIMER ON. In case of power failure, reset timer as explained above.


Specifications

125V~, 60Hz

15A, 1875W Resistive

10A, 1250W Tungsten

1/2 HP

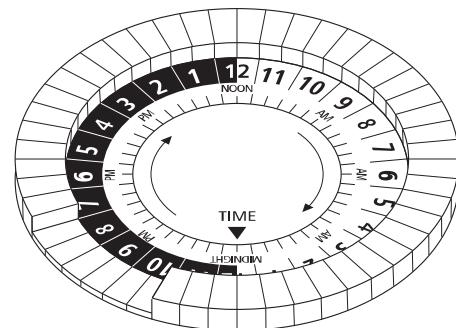

Represents timer that will come on at 7PM and shut off at 10PM.

PRECAUTIONS

- For indoor use only.
- Do not use with any device which exceeds capacity of timer.
- Always ensure that device plug is fully inserted into timer.
- If timer needs cleaning, unplug and wipe with a dry cloth.
- Do not immerse in water or any liquid.

FAN HEATERS AND HEATERS WITH EXPOSED ELEMENTS SHOULD NOT BE CONNECTED TO TIMERS.