

ASSEMBLY INSTRUCTIONS

Description: Lounge










Important safety instructions:


- Please carefully read all instructions before assembling the lounge.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description		QTY
1.	Seat Frame		1
2.	Back Panel		1
3.	Left Wood Arm		1
4.	Right Wood Arm		1
5.	Left Side Metal Frame		1
6.	Right Side Metal Frame		1
7.	Front Rail		1
8.	Seat cushion		1
9.	Removable Back Cushion		1

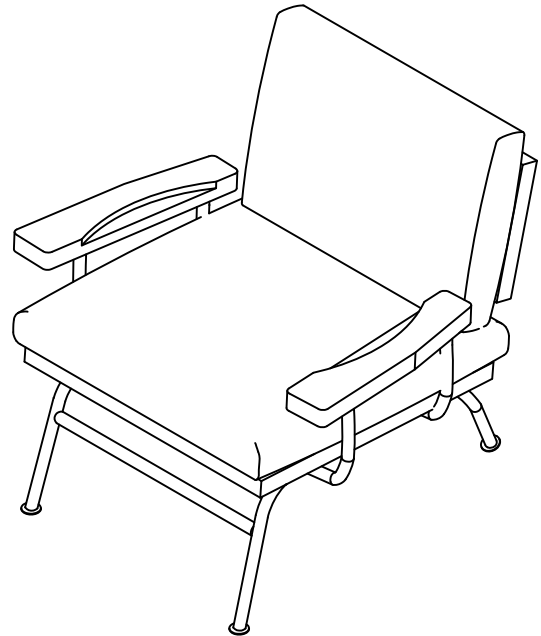

Hardware List

Item	Description		QTY
a	Short Bolts	Ø1/4"x3/4"L 	14
b	Long Bolts	Ø1/4"x1-1/2"L 	4
c	Spring Washers	1/4" Dia 	18
d	Small Flat Washers	1/4"*12mm 	4
e	Big Flat Washers	1/4"*16mm 	14
f	Allen Wrench	1/4" 	1
g	Wooden Plugs		4

Assembly Procedures:

Step 1. Assemble the lounge on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Loosely attach front rail (7) to left side metal frame (5) and right side metal frame (6) aligning the insert bar on side metal frames (5 & 6) to the end of front rail (7) as shown below.

(a)x2 Short Bolts $\varnothing 1/4 \times 3/4$ "




(e)x2 Big Flat Washers $1/4 \times 16$ mm



(c)x2 Spring Washers $1/4$ "



(f)x1 Allen Wrench $1/4$ "

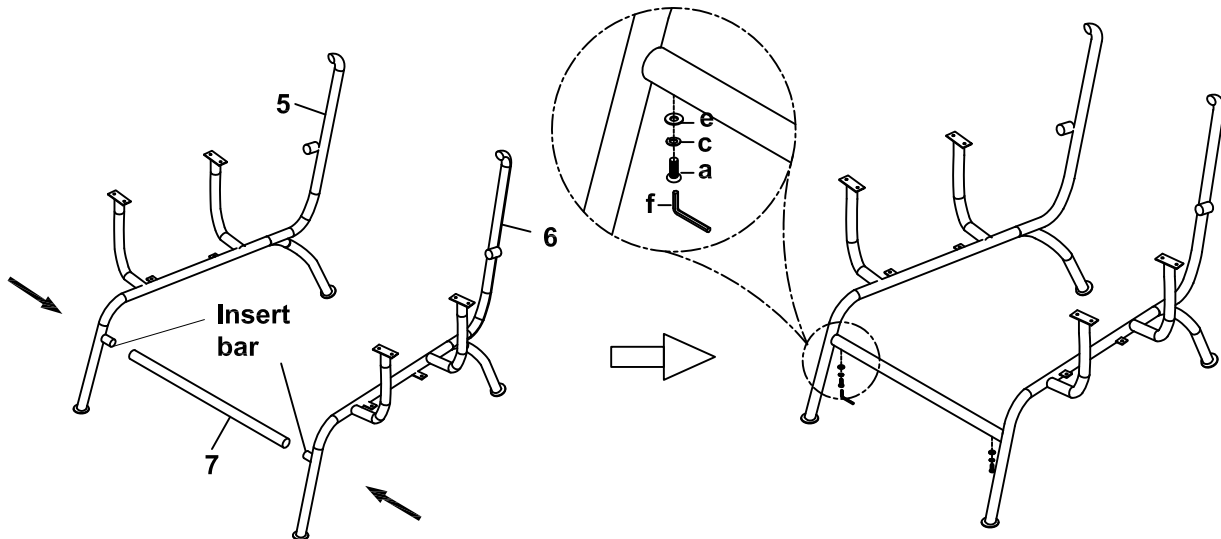

Step 2. Loosely attach back panel (2) to assembled left/right side frame (5,6) as shown below.


(b)x4 Long Bolts $\varnothing 1/4 \times 1-1/2$ "



(d)x4 Small Flat Washers $1/4 \times 12$ mm



(c)x4 Spring Washers $1/4$ "

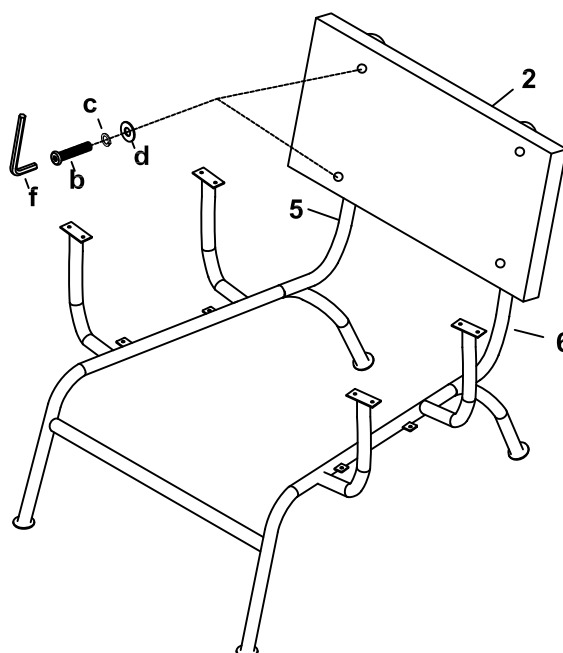

Step 3. Attach the left wood arm (3) and right wood arm (4) to the left/right side frame (5,6) as shown below. Securely tighten the bolts with Allen wrench (f).


(a)x8 Short Bolts $\varnothing 1/4" \times 3/4"$



(e)x8 Flat Washers $1/4" \times 16\text{mm}$



(c)x8 Spring Washers $1/4"$

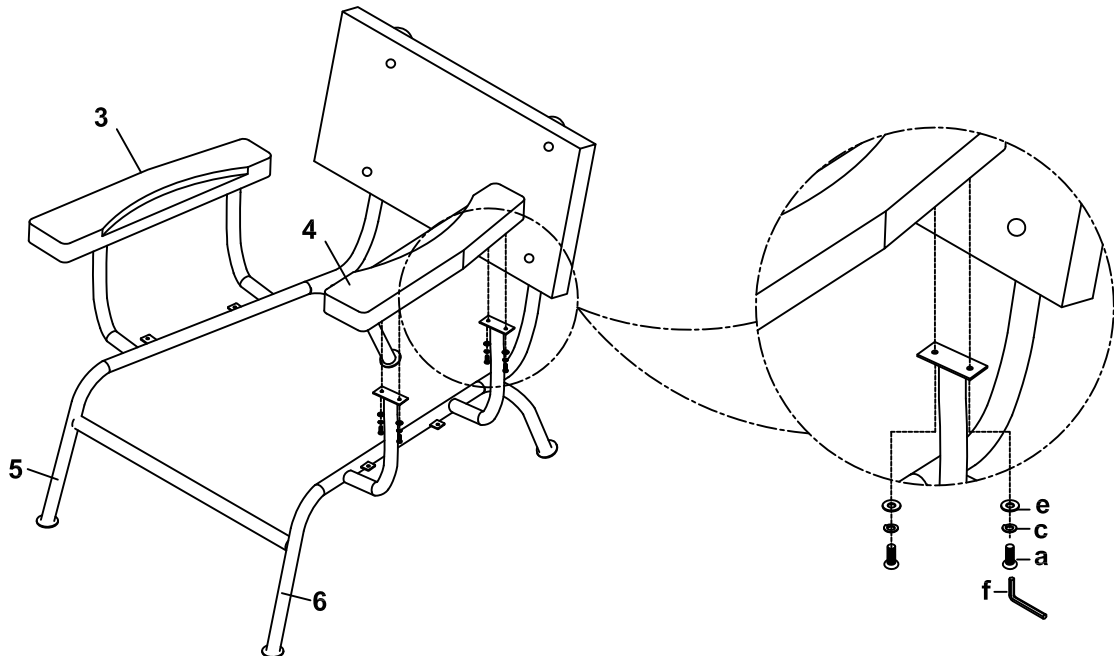

Step 4. Attach seat frame (1) to assembled left/right frame (5,6) using bolts (a) as shown below. Securely tighten all bolts with Allen wrench (f).


(a)x4 Short Bolts $\varnothing 1/4" \times 3/4"$



(e)x4 Big Flat Washers $1/4" \times 16\text{mm}$




(c)x4 Spring Washers $1/4"$

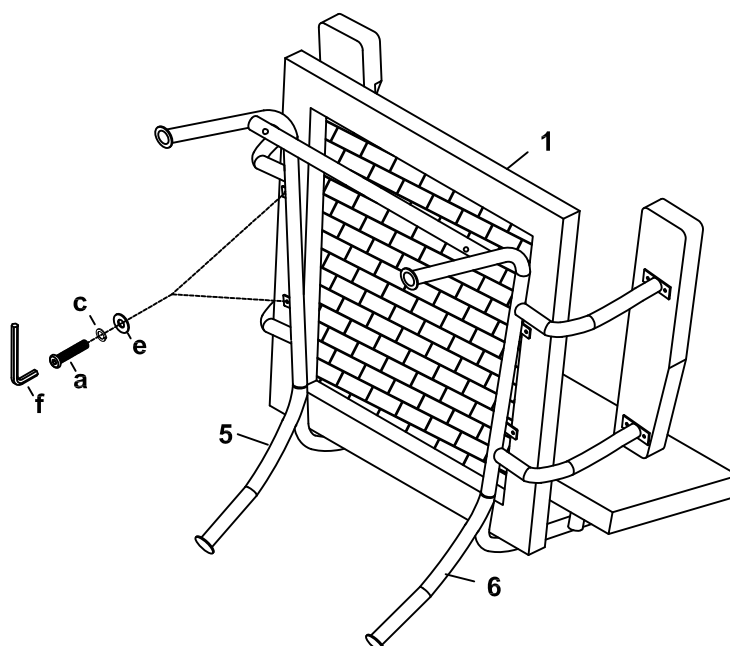

Step 5.


- 1) Turn the assembled lounge to an upright position.
- 2) Attach wooden plugs (g) to each bolt hole on back panel (2), tighten with rubber hammer to knock the wooden plug till its tighten. Note: use a soft cloth between the wooden plug and hammer to prevent damage to wooden plug finish.

(g)x4 Wooden Plugs 

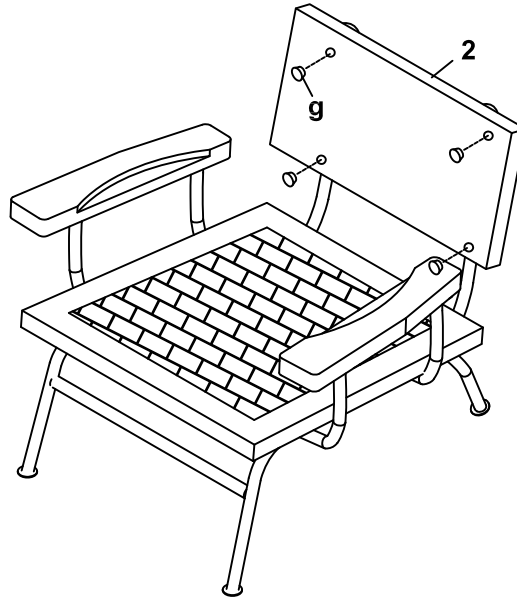

Step 6.

- 1) Assembly is complete. Failure to follow these instructions may cause the bolts to misalign during assembly.
- 2) Put the seat cushion (8) and back cushions (9) on the assembled lounge.

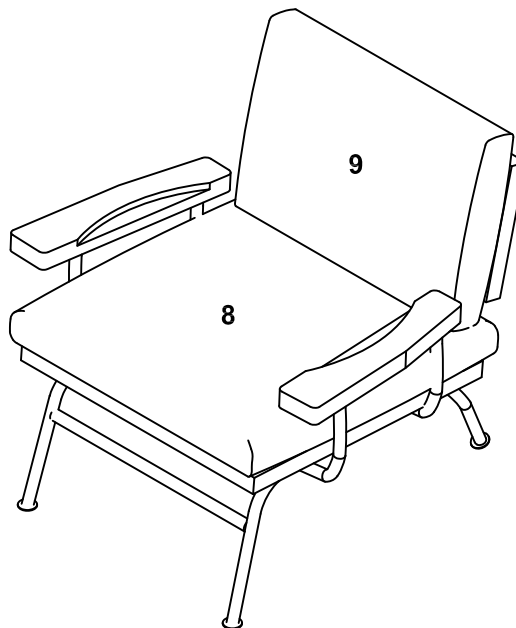

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase