

Description: One Arm lounge

Important safety instructions:


- Please carefully read all instructions before assembling the lounge.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description	QTY
P1	Seat	1
P2	Side Leg Frame	1
P3	Back Leg Frame	1
P4	Side Top Rail 1	1
P5	Back Top Rail 2	1
P6	Front Foot	1

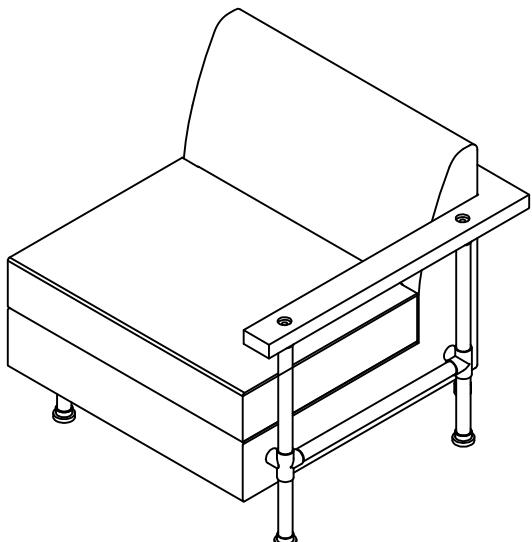

Hardware List


Item	Description	QTY
H1	Short Bolts Ø1/4" *3/4"	5
H2	Lock Washers 1/4"	5
H3	Flat washers 1/4"	5
H4	Small Allen Wrench 1/4"	1
H5	Long Bolts Ø5/16" *1-1/2"	5
H6	Lock Washers 5/16"	5
H7	Flat washers 5/16"	5
H8	Big Allen Wrench 5/16"	1
H9	Long Screw #8*1-3/4"	5
H10	"U" Metal Block	1
H11	Small Screw #8 *5/8"	1

Note: These hardware are for setting up a unit, please see the "Assembly instructions for Setting up a unit"

Assembly Procedures:

Step 1. Assemble the lounge on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Securely tighten the side top rail (P4) to back top rail (P5) using long screws (H9) with screw driver(not provided).

(H9)x2 Long Screw #8*1-3/4"

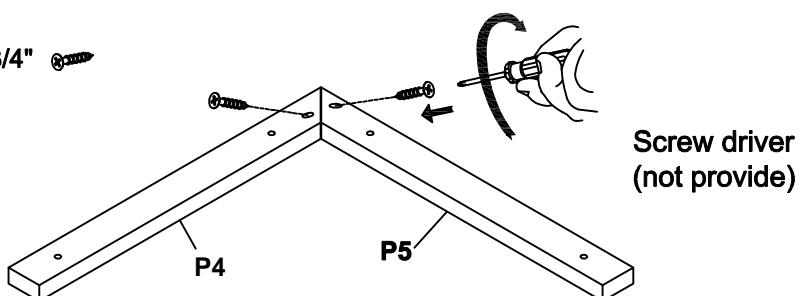


Step 2. Attach side leg frame (P2) and back leg frame (P3) to the side top rail (P4) and back top rail (P5) as shown below. Loosely tighten the bolts with Allen wrench (H4).

(H1)x4 Short Bolts Ø1/4" *3/4" 

(H2)x4 Lock Washers 1/4" 

(H3)x4 Flat washers 1/4" 

(H4)x1 Small Allen Wrench 1/4" 

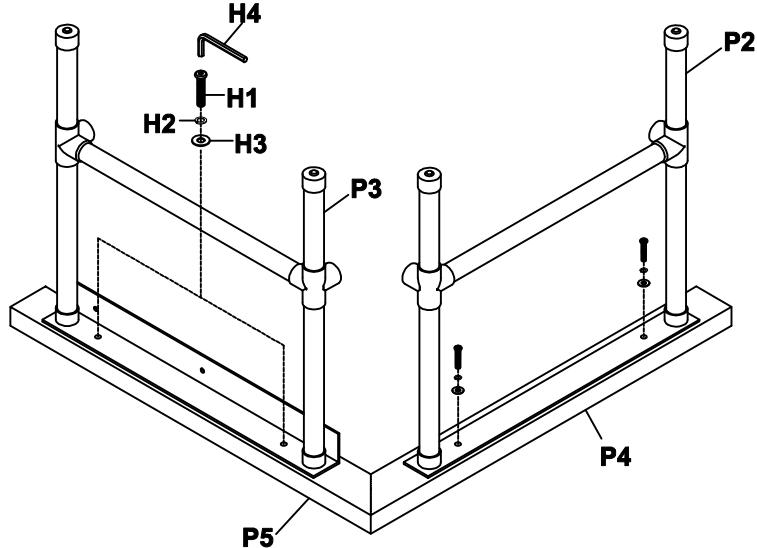

Step 3.


- 1) Loosely attach the side leg frame (P2) and back leg frame (P3) to the seat (P1) as shown below.
- 2) Attach front leg (P6) to the bottom of seat (P1) as shown below.

(H5)x5 Long Bolts Ø5/16" *1-1/2" 

(H6)x5 Lock Washers 5/16" 

(H7)x5 Flat washers 5/16" 


(H8)x1 Big Allen Wrench 5/16" 

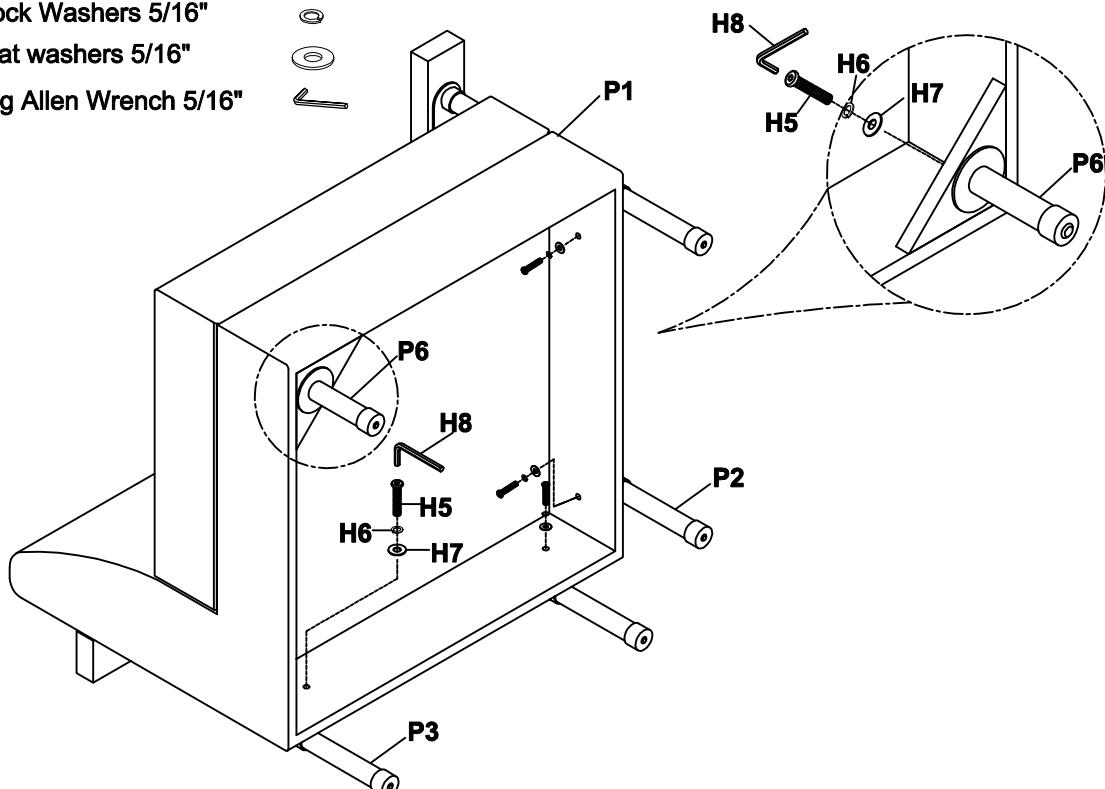

Step 4.

- 1) Turn the assemble lounge to an upright position. Make sure the lounge is level and make sure each side/back leg frame (P2/P3) center on back of seat (P1), then securely tighten all bolts with Allen wrench (H8).
- 2) Attach the metal bracket on the back leg frame (P3) to the back of seat (P1) using the long screws (H9) with screw driver (not provided).
- 3) To level sofa. After completing all other steps, stand the sofa upright on all four legs. If there is a gap between a leg and the floor. Please adjust the adjustable leveler up or down under each leg. Assembly is complete.
- 4) **Failure to follow these instructions may cause the bolts to misalign during assembly.**

(H9)x3 Long Screw #8*1-3/4" 

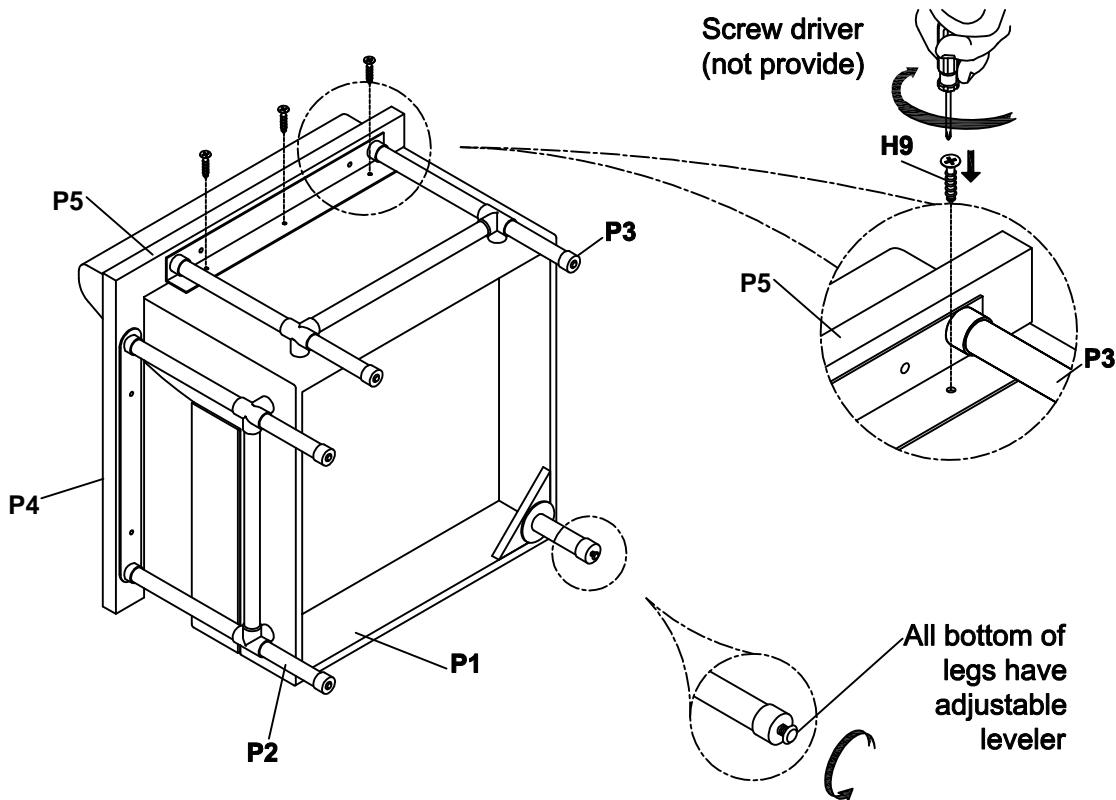

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase