


Description: Lounge**Important safety instructions:**


- Please carefully read all instructions before assembling the lounge.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description		QTY
P1	Back Top Rail		1
P2	Front/Back Rails	 W/Two bolt holes in center of each rail	2
P3	Stretcher		1
P4	Left Side Metal Frame		1
P5	Right Side Metal Frame		1
P6	Back Cushion		1
P7	Seat Cushion		1
P8	Upholstery Arm Rests		2

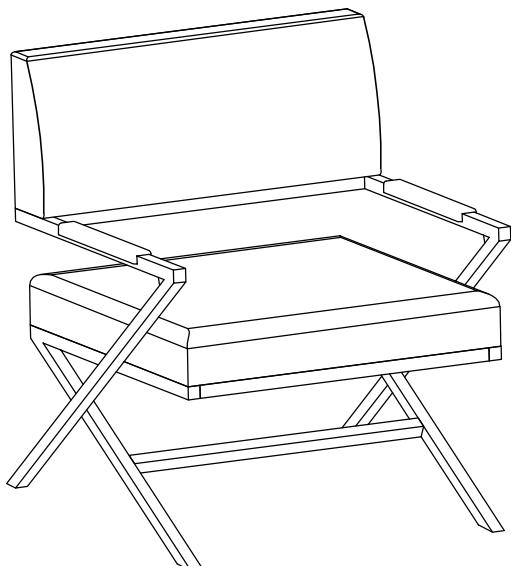
**Hardware List**

Item	Description		QTY
H1	5/8" length Bolts	5/8" * Ø1/4"	12
H2	1" length Bolts	1" * Ø1/4"	8
H3	1 1/2" length Bolts	1 1/2" * Ø1/4"	4
H4	2" length Bolts	2" * Ø1/4"	4
H5	Allen Wrench	4mm	1

Assembly Procedures:

Step 1. Assemble the lounge on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Insert each inserted bar on left side metal frame (P4) and right side metal frame (P5) to the end of front/back rail (P2) and stretcher (P3), do not tighten the bolts at this time.

Caution: Each seat rail (P2) have two bolt holes in center.

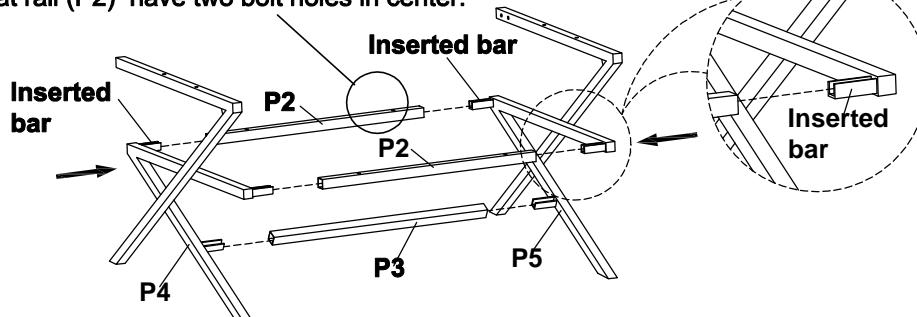


Step 2.

- 1) Loosely attach back top rail (P1) to left/right side frame(P4/P5) as shown below..
- 2) Use $\frac{5}{8}$ "L Bolts (H1) and 1" L Bolts (H2) to attach left side metal frame (P4) and right side metal frame (P5) to back top rail (P1), rails (P2) and stretcher (P3). Securely tighten all bolts with Allen wrench (H5).

(H1)x12 **$\frac{5}{8}$ " length Bolts Ø1/4"** 

(H2)x4 **1" length Bolts Ø1/4"** 

(H5)x1 **Allen Wrench 4mm** 

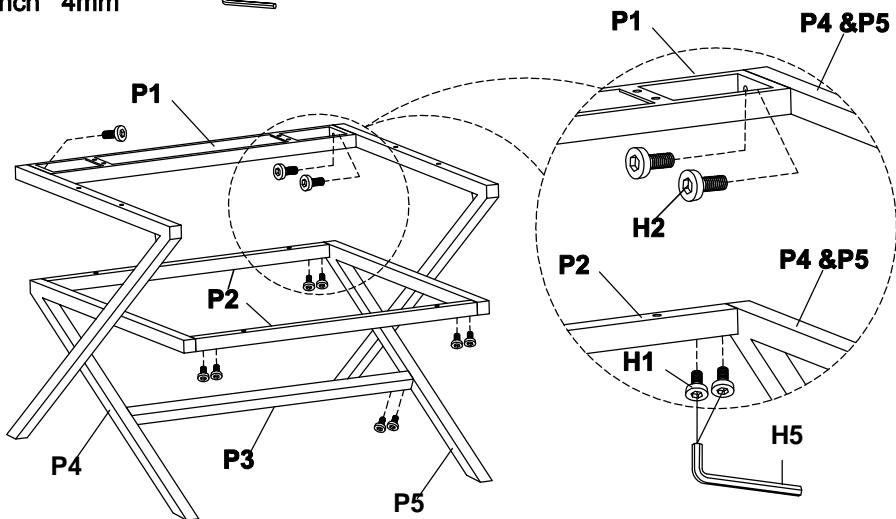


Step 3.

- 1) Attach the seat cushion (P7) to assembled left/right side frame (P4/P5) and rails (P2) using 2" bolts (P4).
- 2) Attach the upholstery arm rests (P8) to the left/right side metal frame (P4/P5) using $1\frac{1}{2}$ " bolts (P3).
- 3) Securely tighten all bolts by Allen wrench (H5).

(H3)x4 **$1\frac{1}{2}$ " length Bolts Ø1/4"** 


(H4)x4 **2" length Bolts Ø1/4"** 

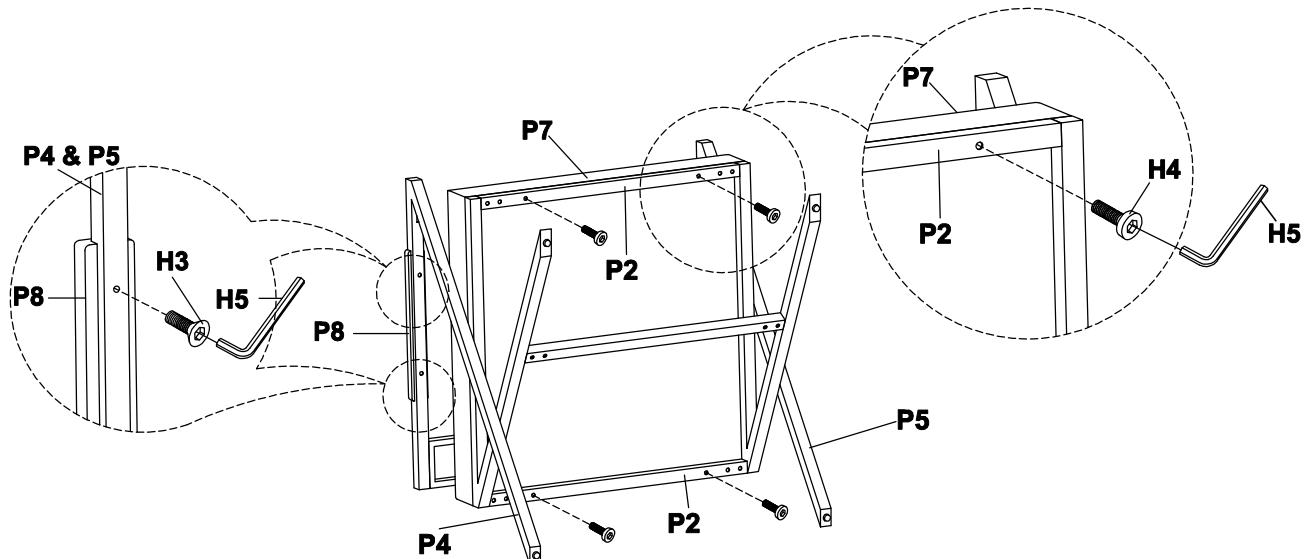

Step 4.


Loosely attach back cushion (P6) to the assembled back top rail (P1) using 1" bolts (H2) as shown below. Securely tighten all bolts with Allen wrench (H5).

(H2)x4 1" length Bolts Ø1/4"

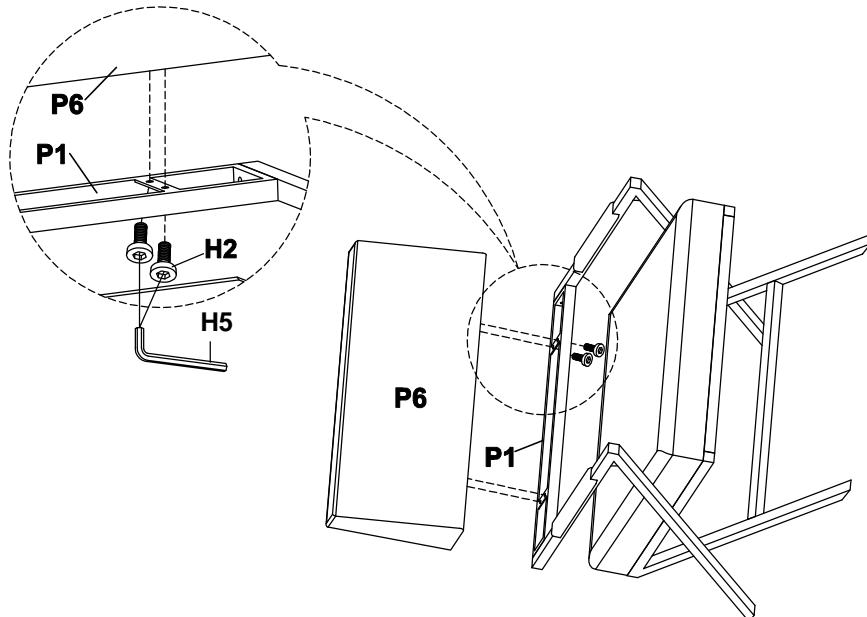

Step 5.

- 1) Turn the assembled lounge base to an upright position.
- 2) Make sure the lounge is level and securely tighten all bolts with Allen wrench (H5).
- 3) Leveler adjustment: Leveler are installed on the legs and adjust as needed to make sure the lounge is level. Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

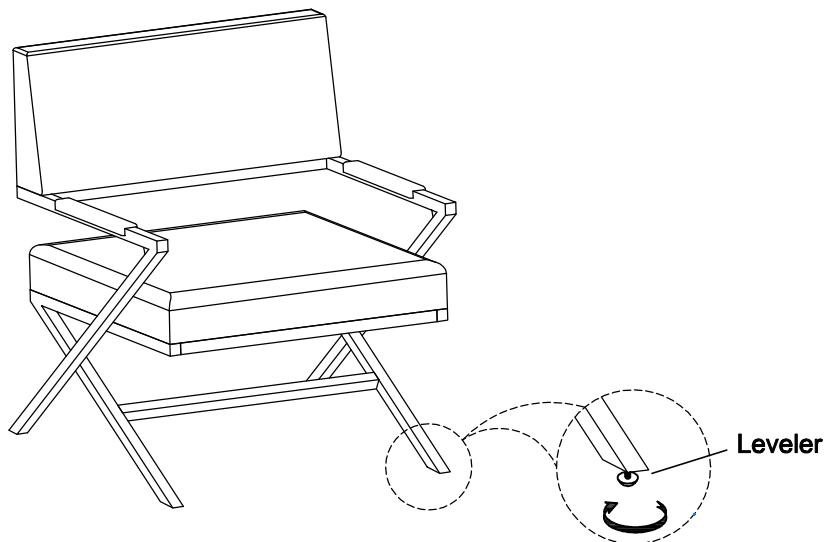

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase