

Description: Clark Lounge**Important safety instructions:**

- Please carefully read all instructions before assembling the lounge.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description		QTY
P1	Back Cushion		1
P2	Seat Cushion		1
P3	Right Leg Frame	 (P3)	1
P4	Left Leg Frame	 (P4)	1

Hardware List

Item	Description	QTY
H1	Short Bolts Ø5/16*1-3/4"	 11
H2	Lock Washers Ø5/16"	 11
H3	Big Flat Washers Ø5/16" *19mm	 11
H4	Allen Wrench 5/16"	 1
H5	Long Bolts Ø1/4*2"	 2
H6	Lock Washers Ø1/4"	 2
H7	Small Flat Washers Ø1/4" *12mm	 2
H8	Allen Wrench 1/4"	 1
H9	Wooden Plugs	 2

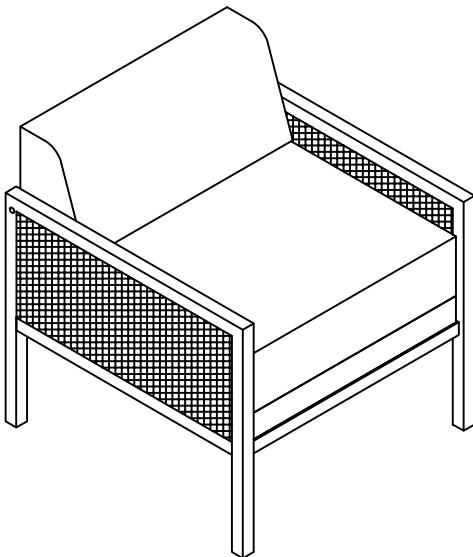

Assembly Procedures:

Step 1. Assemble the lounge on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Loosely attach seat cushion (P2) to back cushion (P1) as shown below.

(H1)x3 Short Bolts Ø5/16*1-1/2"




(H2)x3 Lock Washers Ø5/16"



(H3)x3 Big Flat Washers Ø5/16" *19mm



(H4)x1 Allen Wrench 5/16"

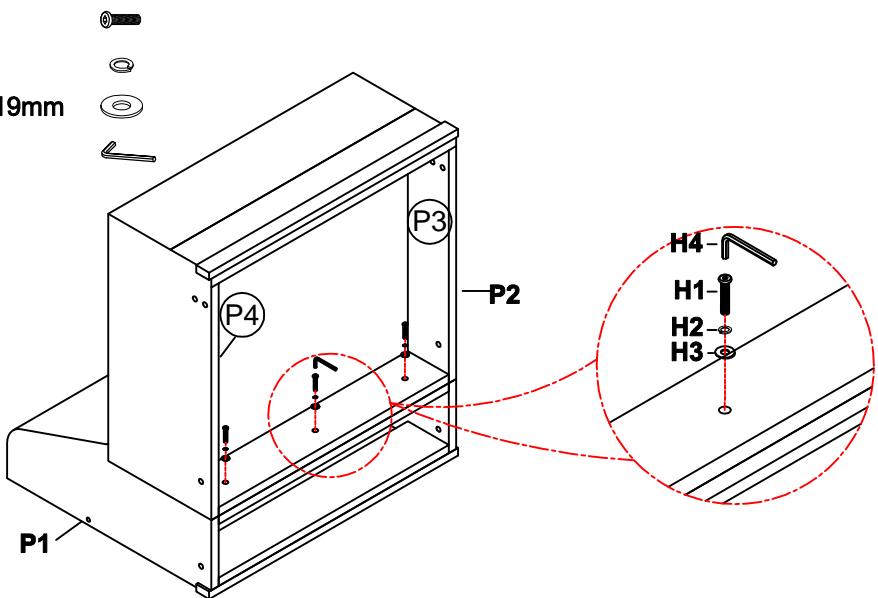

Step 2. Loosely attach right leg frame (P3) to the back cushion (P1) and seat cushion (P2) and loosely attach seat cushion (P2) to the left leg frame (P4) following the labels "P3" and "P4" on the right/left leg frame (P3), side of back cushion (P1) and seat cushion (P2) accordingly. Please see below.

(H1)x8 Short Bolts Ø5/16*1-3/4"



(H2)x8 Lock Washers Ø5/16"



(H3)x8 Big Flat Washers Ø5/16" *19mm



(H5)x1 Long Bolts Ø1/4*2"




(H6)x1 Lock Washers Ø1/4"



(H7)x1 Small Flat Washers Ø1/4" *12mm



(H8)x1 Allen Wrench 1/4"

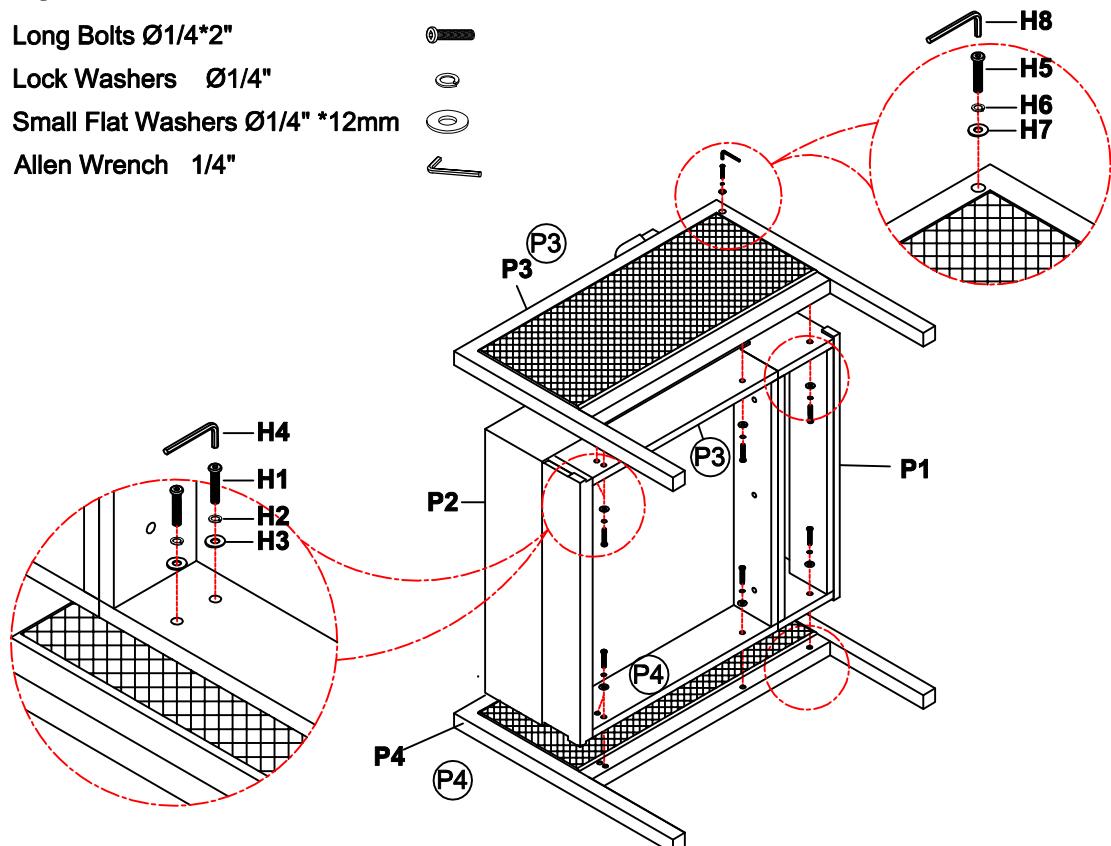

Step 3. Attach the other left leg frame (P4) to the back cushion (P1) as shown below. Securely tighten the bolts with Allen wrench (H8).


(H5)x1 Long Bolts Ø1/4*2"



(H6)x1 Lock Washers Ø1/4"



(H7)x1 Small Flat Washers Ø1/4" *12mm

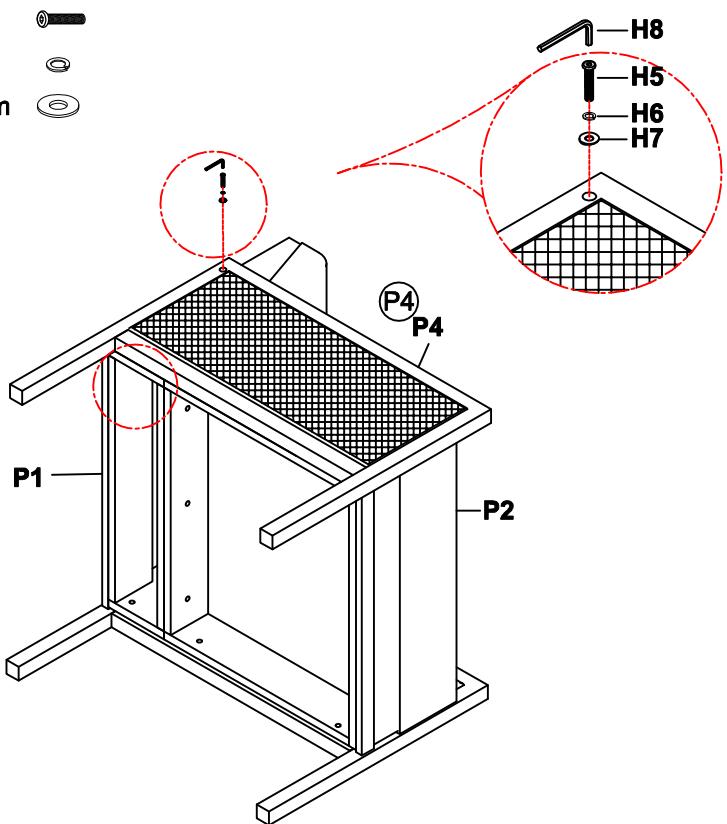


Step 4.

1) Turn the assembled lounge to an upright position. Make sure the lounge is level and securely tighten all the bolts and with Allen wrench (H4 & H8), but do not over tighten the bolts.

2) Attach wooden plugs (H9) to each bolt hole, tighten with rubber hammer to knock the wooden plug till its tighten. **Note:** use a soft cloth between the wooden plug and hammer to prevent damage to wooden plug finish.

3) Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

(H9)x2 Wooden Plugs

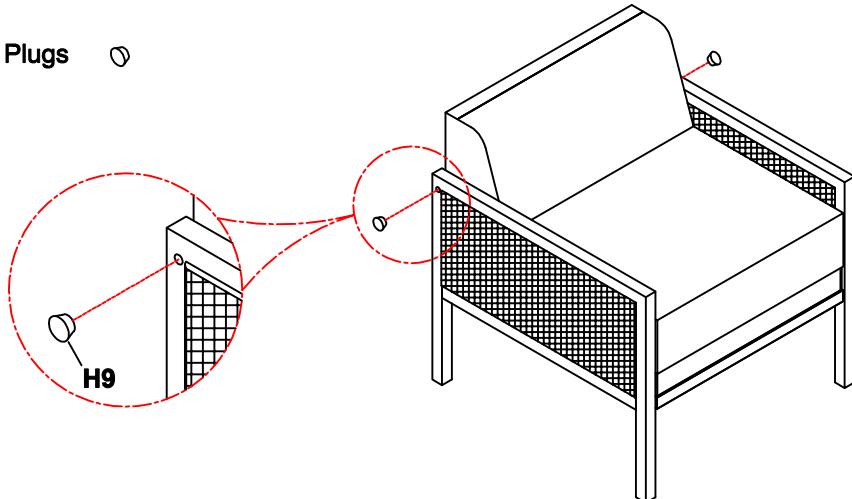

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase