









Assembly instructions:


No.	DESCRIPTION	IMAGE	QTY
P1	FRONT LEGS		2
P2	BACK LEGS		2
H1	Flat Washer (Ø5/16**22*1)		8
H2	Spring washer (Ø5/16**13*2)		8
H3	Long Bolt(5/16*55)		8
H4	Allen wrench		1

NOTE:PO#is located underneath/inside of each item .Please be prepare to provide this # should any claim be necessary.

CAUTION:Item is heavy assembly should be performed by two performed by two people.

Estimate assembly time: 5 minutes

Step 1.Turn the chair upside down and lay on protective carpet.Open the black fabric of the bottom,and take out the legs underneath the seat.

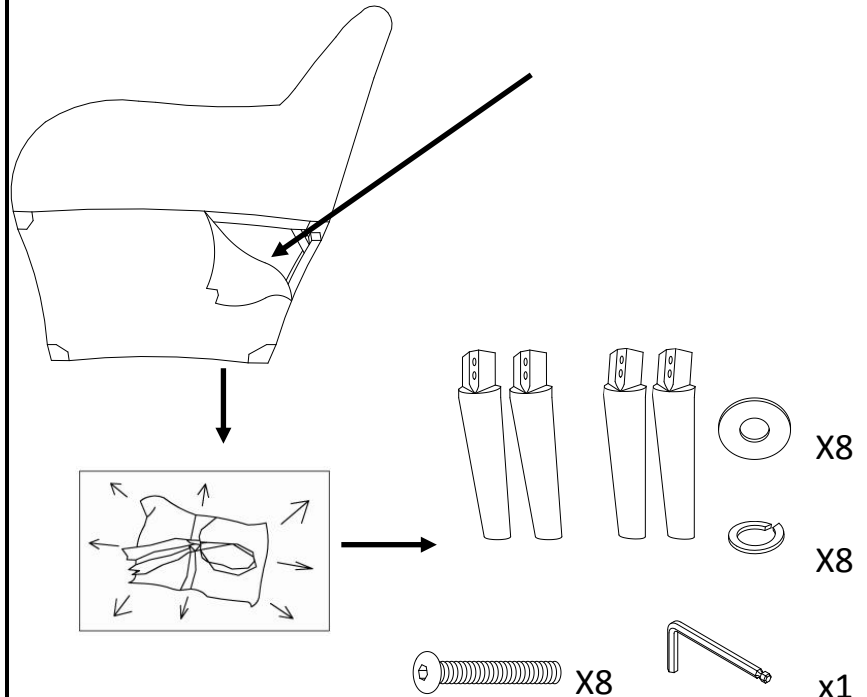

Step 2: Attach front leg and back legs (P1、P2) to seat frame using bolt (H3), lock washer (H2), washer (H1), Use allen wrench (H4) to secure the bolts.

