

Description: Lounge**Important safety instructions:**


- Please carefully read all instructions before assembling the lounge.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description	QTY
A	Seat Frame	1
B	Back Frame	1
C	Left Arm	1
D	Right Arm	1
E	Seat Cushion	1
F	Back Cushion	1
G	Front Legs	2
H	Back Legs with Locator Dowel	2

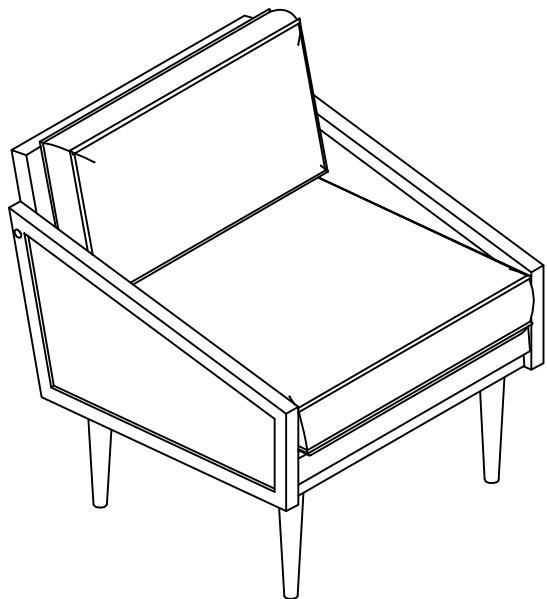**Hardware List**

Item	Description	QTY
a	Big Short Bolts Ø5/16*1-1/2"L	8
b	Big Long Bolts Ø5/16*1-3/4"L	1
c	Lock Washers Ø5/16"	9
d	Flat Washers Ø5/16" *19mm	9
e	Allen Wrench 5/16"	1
f	Small Bolts Ø1/4*2"	2
g	Lock Washers Ø1/4"	2
h	Flat Washers Ø1/4" *12mm	2
i	Allen Wrench 1/4"	1
j	Wooden Plugs	2
k	Nut 3/8"	4
l	Lock Washers Ø3/8"	4
m	Flat Washers Ø3/8" *22mm	4
n	Open Wrench 3/8"	1

Assembly Procedures:

Step 1. Assemble the lounge on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach seat frame (A) to back frame (D) as shown below. Securely tighten the bolts with Allen wrench (e).

(a)x2 Bolts



(b)x1 Bolts




(c)x3 Lock Washers



(d)x3 Flat Washers



(e)x1 Allen Wrench

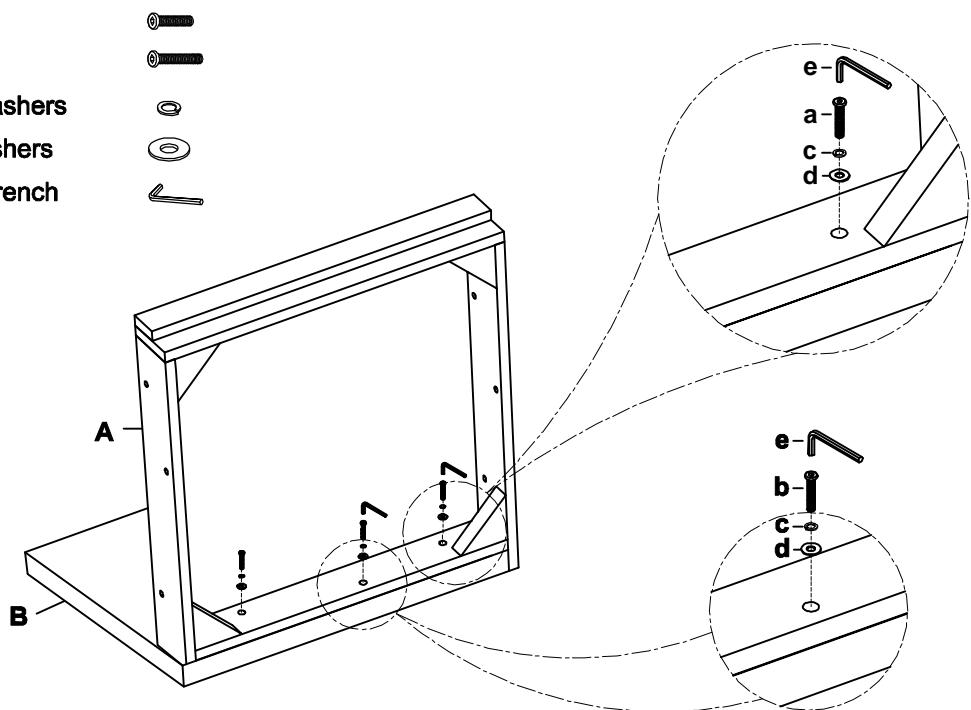

Step 2. Attach left arm (C) to the seat frame (A) and back frame (B) following the label "L" on the left arm (B), the side of seat frame (A) and back frame (B) accordingly as shown below. Securely tighten the bolts with Allen wrench (e) and (i).

(a)x3 Big Short Bolts



(f)x1 Small Bolts



(c)x3 Lock Washers



(g)x1 Lock Washers




(d)x3 Flat Washers



(h)x1 Flat Washers



(i)x1 Allen Wrench

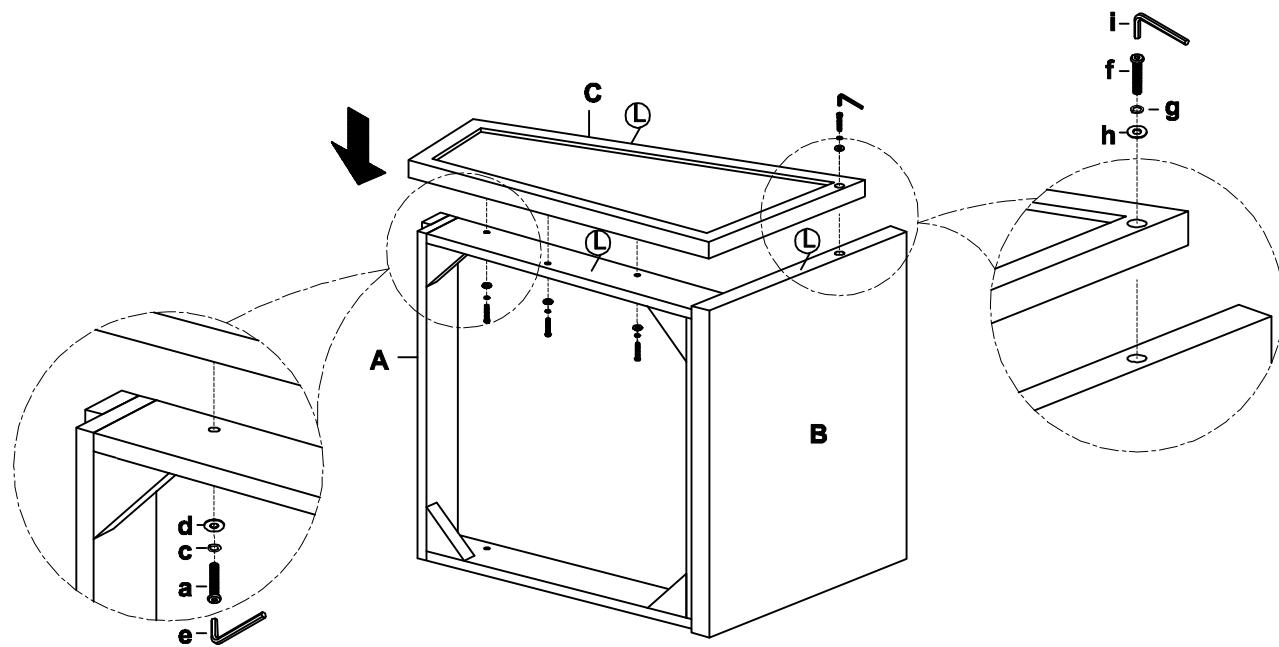

Step 3. Attach right arm (D) to the seat frame (A) and back frame (B) following the label "R" on the right arm (B), the side of seat frame (A) and back frame (B) accordingly as shown below. Securely tighten the bolts with Allen wrench (e) and (i).

(a)x3 Big Short Bolts



(c)x3 Lock Washers



(d)x3 Flat Washers




(f)x1 Small Bolts



(g)x1 Lock Washers



(h)x1 Flat Washers

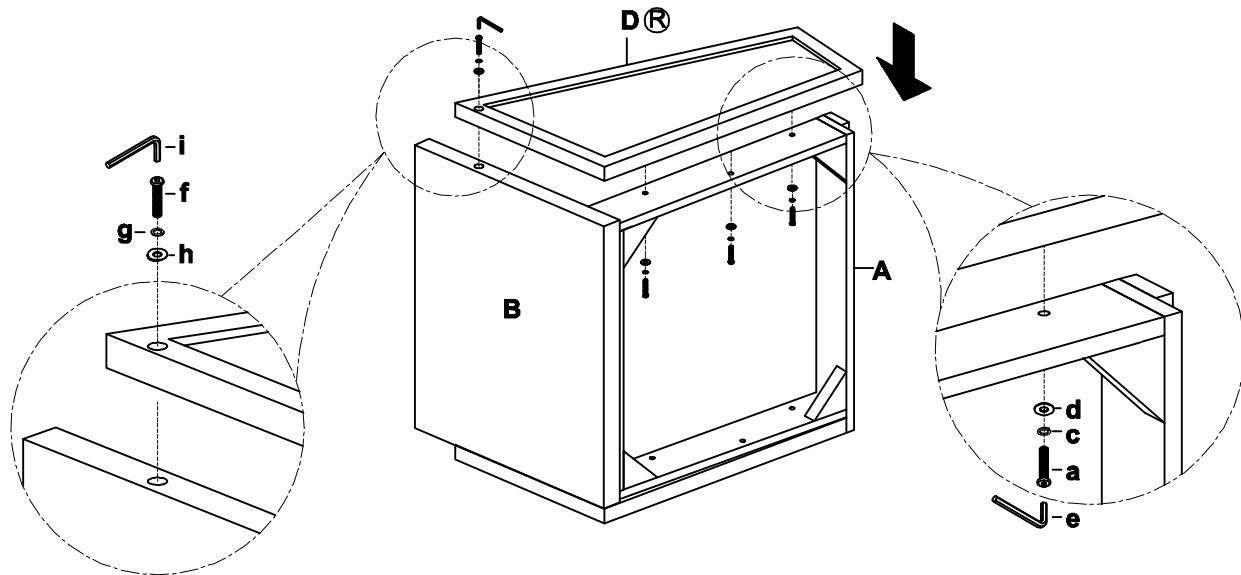

Step 4. Attach front leg (G) and back leg (H) to the bottom of seat frame (A) as shown below. Securely tighten the bolts with open wrench (n).

(k)x4 Bolts



(l)x4 Lock Washers





(m)x4 Flat Washers



(n)x1 Allen Wrench




Note: the back legs with locator dowel

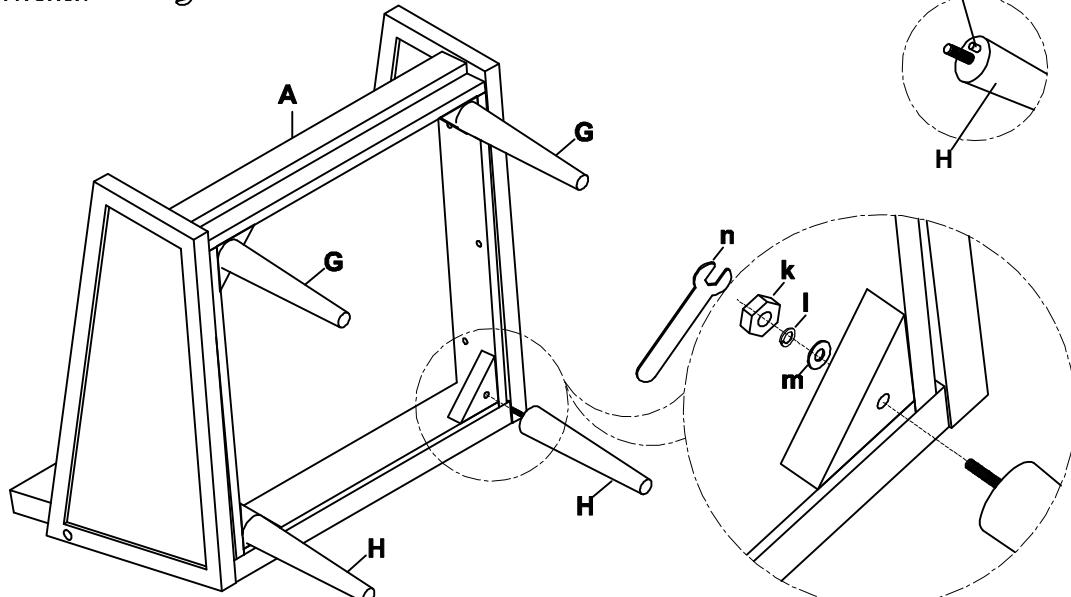

Step 5.


- 1) Turn the assembled lounge to an upright position. Securely tighten all the bolts with Allen wrench (e,i) and open wrench (n).
- 2) Attach wooden plugs (j) to each bolt hole, tighten with rubber hammer to knock the wooden plug till its tighten. Note: use a soft cloth between the wooden plug and hammer to prevent damage to wooden plug finish.

(j)x4 Wooden Plugs 

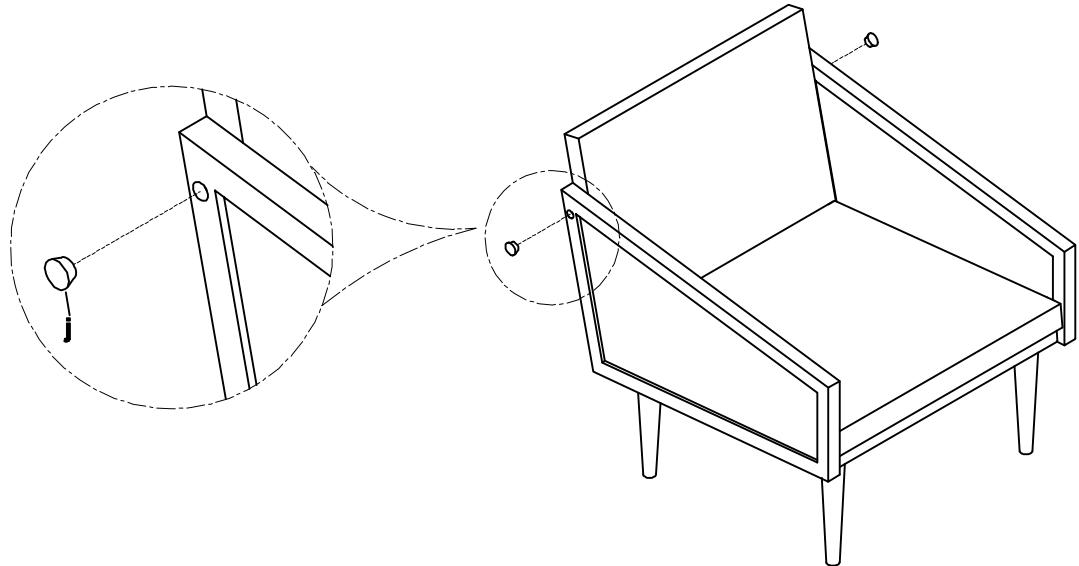

Step 6.

- 1) Assembly is complete. Failure to follow these instructions may cause the bolts to misalign during assembly.
- 2) Put the seat cushions (E) and back cushions (F) on the assembled lounge.

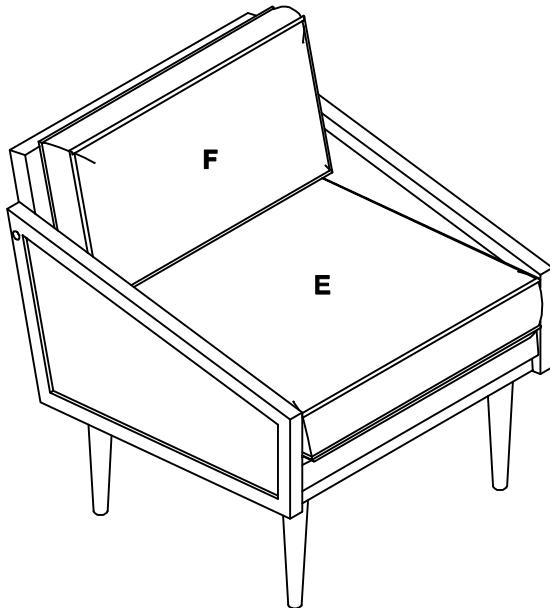

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase