

ASSEMBLY INSTRUCTIONS

Description: Obsidian Counter stool
Obsidian Barstool

Important safety instructions:

- Please carefully read all instructions before assembling.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

| Item | Description | QTY |
|------|--------------|-----|
| P1 | Chair Back | 1 |
| P2 | Seat Cushion | 1 |
| P3 | Left leg | 1 |
| P4 | Right Leg | 1 |
| P5 | Stretcher | 1 |


Hardware List

| Item | Description | QTY |
|------|----------------------------------|-----|
| H1 | Countersunk bolts Ø1/4" * 1/2" L | 4 |
| H2 | Short Bolts Ø1/4" * 5/8" L | 8 |
| H3 | Long Bolts Ø1/4" * 1 1/4" L | 2 |
| H4 | Lock Washers 1/4" | 10 |
| H5 | Flat Washers 1/4" | 10 |
| H6 | Allen Wrench 1/4" | 1 |

Assembly Procedures:

Step 1. Assemble the chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish.
Loosely attach seat cushion (P2) to the chair back (P1) as shown below.

- (H2)x4 Short Bolts Ø1/4" * 5/8" L
(H4)x4 Lock Washers 1/4"
(H5)x4 Flat Washers 1/4"
(H6)x1 Allen Wrench 1/4"

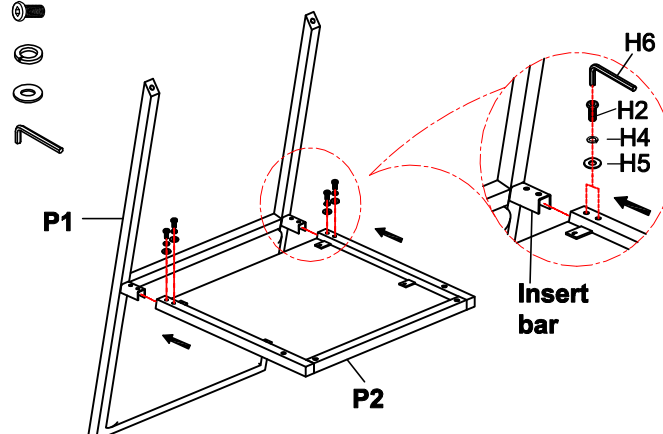

Step 2. Loosely attach stretcher (P5) between the left leg (P3) and right leg (P4) following the labels "P3" "P4" on the legs accordingly as shown below.


(H2)x4 Short Bolts $\varnothing 1/4" \times 5/8" L$



(H4)x4 Lock Washers 1/4"



(H5)x4 Flat Washers 1/4"

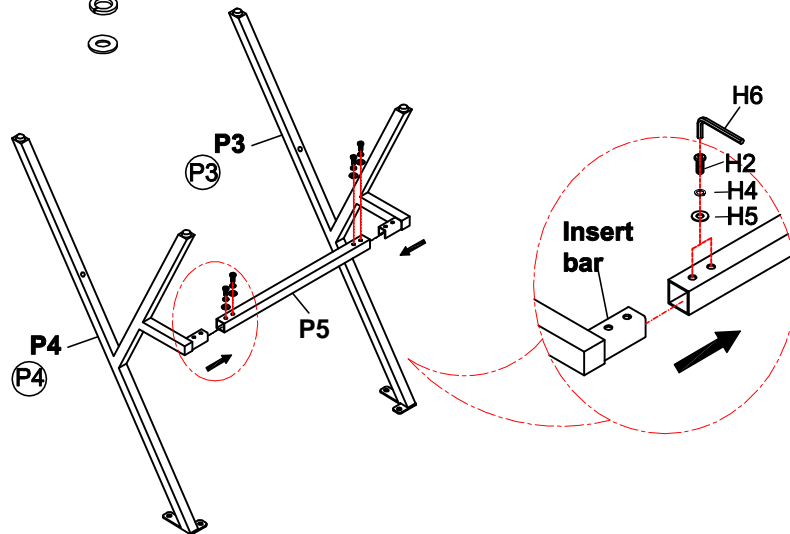

Step 3.

- 1) Loosely attach assembled base to chair back (P1) and bottom of seat cushion (P2) as shown below.
- 2) Turn the assembled chair to an upright position. Make sure the chair is level and securely tighten all bolts with Allen wrench (H6).
- 3) **Leveler adjustment:** Leveler are installed on the legs and adjust as needed to make sure the chair is level. Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

(H1)x4 Countersunk bolts $\varnothing 1/4" \times 1 1/2" L$



(H3)x2 Long Bolts $\varnothing 1/4" \times 1 1/4" L$




(H4)x2 Lock Washers 1/4"



(H5)x2 Flat Washers 1/4"



Adjustable
Leveler on
the bottom
of legs

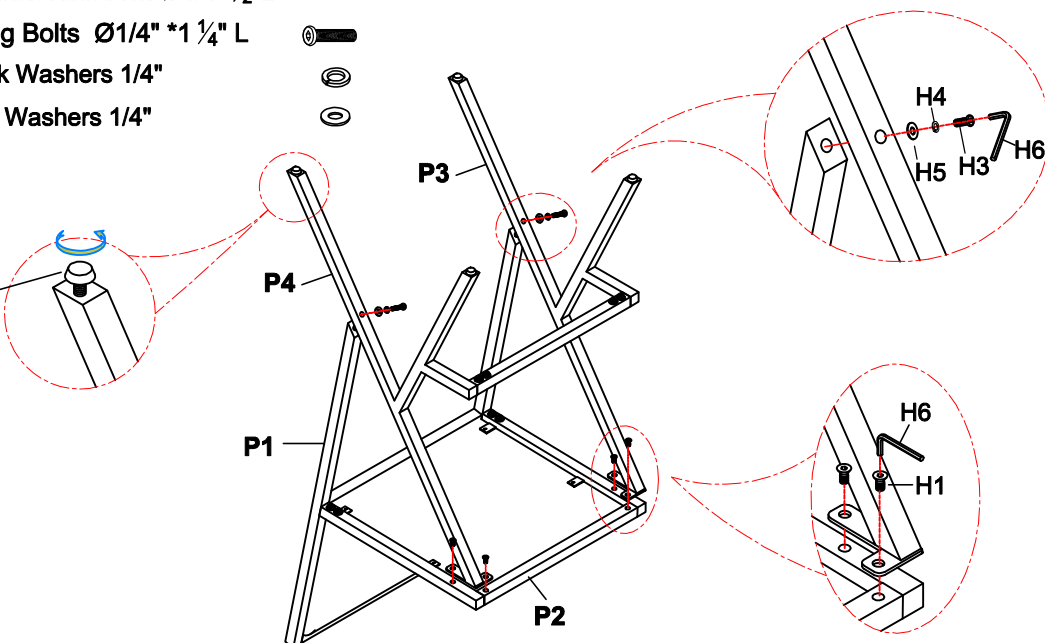

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase