

Description: Easton Backless Counter Stool**Important safety instructions:**

- Please carefully read all instructions before assembling.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description	QTY
P1	Seat Cushion	1
P2	Leg 1	2
P3	Leg 2	2
P4	Long Stretcher	2
P5	Short Stretcher	2

Hardware List



Item	Description	QTY
H1	Bolts Ø1/4"**2"	8
H2	Lock Washers 1/4"	8
H3	Flat Washers 1/4"	8
H4	Allen Wrench 1/4"	1
H5	Wood Screws 8#*1-3/4"	8

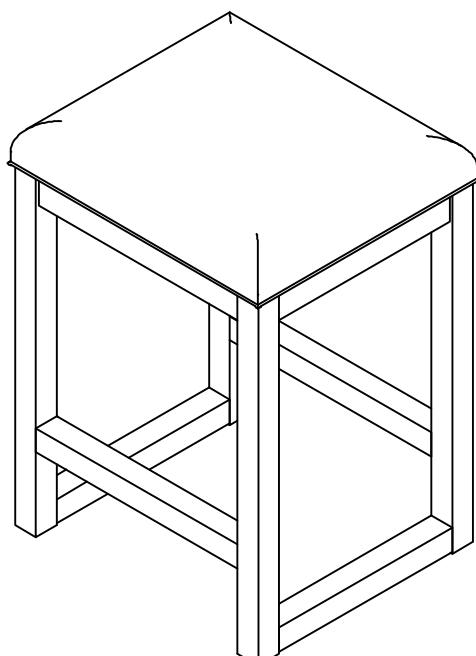

Assembly Procedures:



Step 1. Turn over the cushion (P1) on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the leg 1(P2) with label "P2" to the seat cushion (P1) as shown below.

- (H1)x2 Bolts
- (H2)x2 Lock Washers
- (H3)x2 Flat Washers
- (H4)x1 Allen Wrench

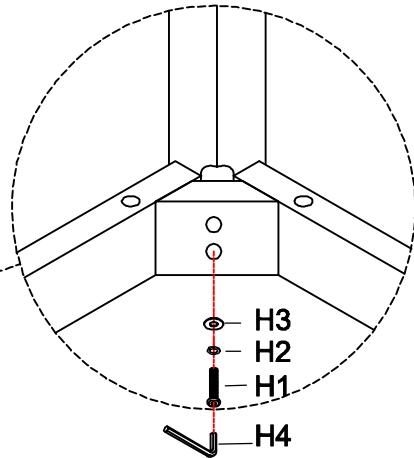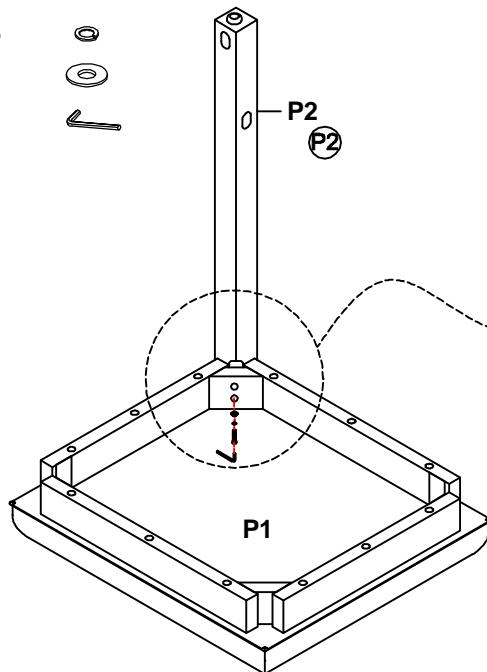


Step 2. Insert long stretcher (P4) between the two legs (P2,P3), then attach leg 2 (P3) with label "P3" to seat cushion as shown below.

- (H1)x2 Bolts
- (H2)x2 Lock Washers
- (H3)x2 Flat Washers

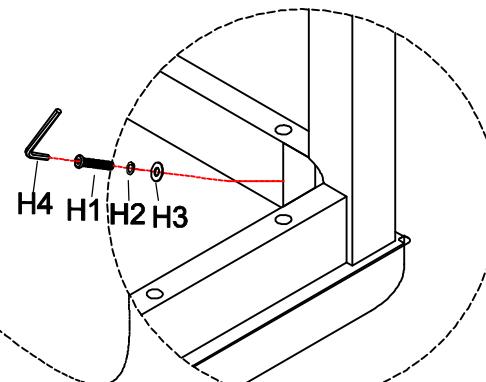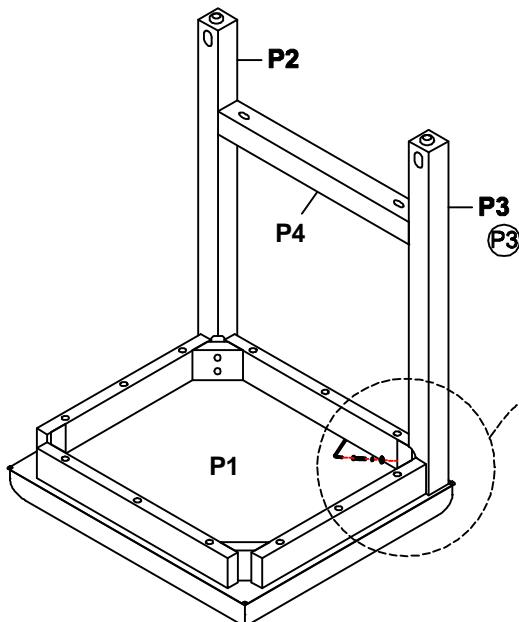

Step 3. Insert short stretcher (P5) between the two legs (P2,P3), then attach second leg 2 (P3) with label "P3" to seat cushion (P1) as shown below.


- (H1)x2 Bolts
- (H2)x2 Lock Washers
- (H3)x2 Flat Washers

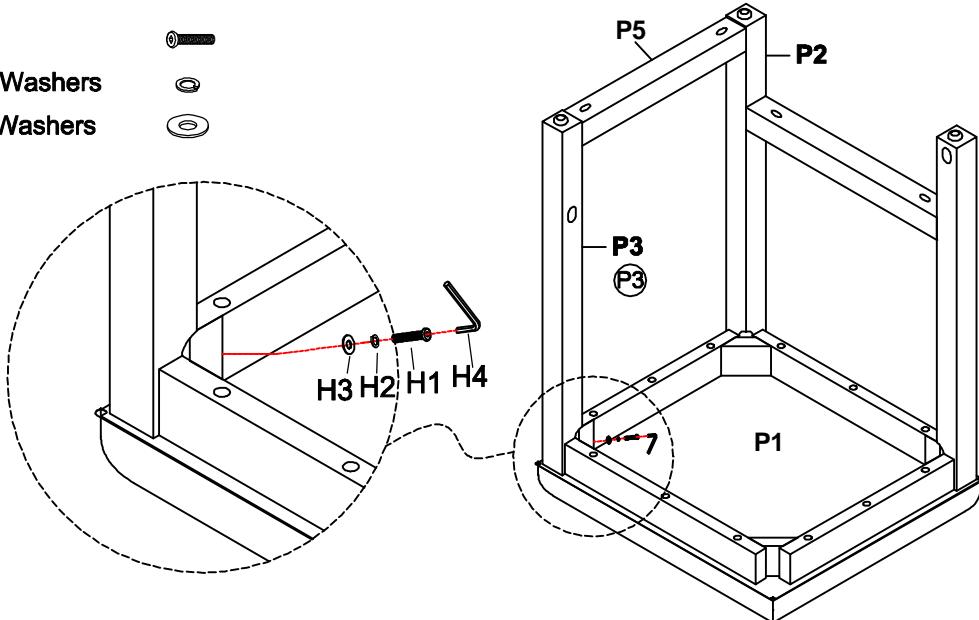

Step 4.

- 1) Insert two stretchers (P4,P5) to the legs (P2, P3), then attach last leg 1 (P2) with label "P2" to seat cushion (P1).
- 2) Make sure the stool is level and securely tighten all bolts with Allen wrench (H4).
- 3) Tighten screws (H5) through the stretchers (P4,P5) to the legs (P2,P3) with screw driver (not provided).
- 4) Turn assembled stool on an upright position.
- 5) Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

- (H1)x2 Bolts
- (H2)x2 Lock Washers
- (H3)x2 Flat Washers
- (H5)x8 Wood Screws

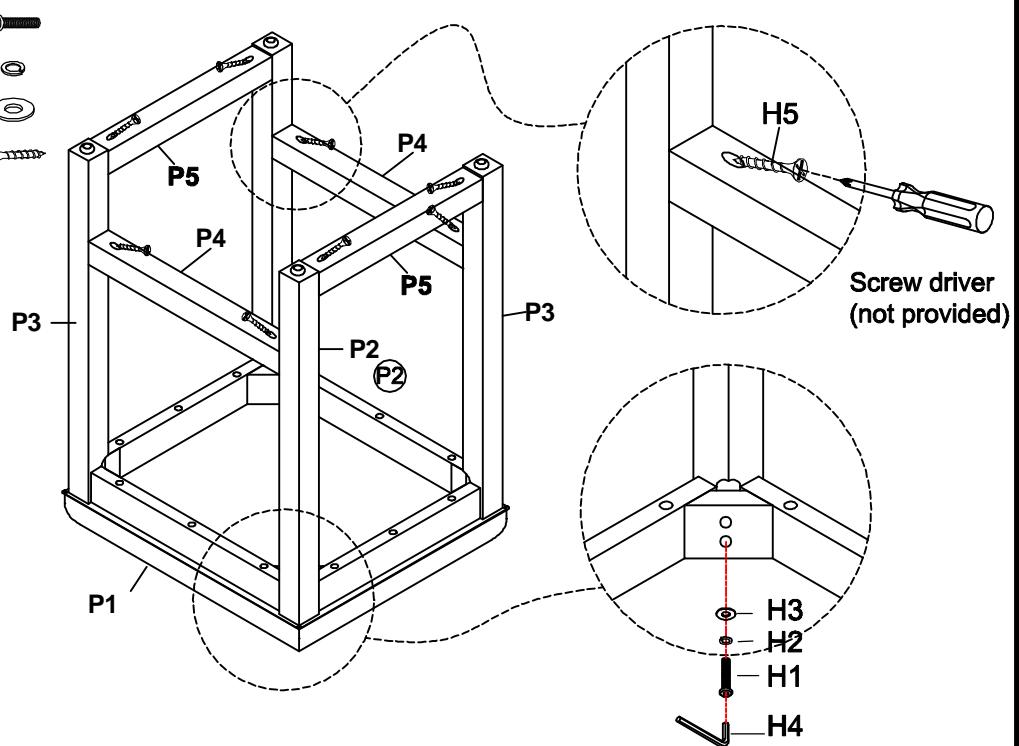

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase