

## ASSEMBLY INSTRUCTIONS

Description: FRANK DINING BENCH

## Important safety instructions:

- Please read carefully all instructions before assembly.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

## Pre-assembly:

- Do not discard any content until assembly is complete to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardware from box.

## Parts List

Item	Description	QTY
P1	Seat Frame	1
P2	Frame Legs 1	2
P3	Frame Legs 2	2
P4	Stretcher	1

## Hardware List

Item	Description	QTY
H1	Bolts Ø5/16" x 1-3/4"L	8
H2	Bolts Ø5/16" x 3/4"L	14
H3	Lock Washers 5/16"	22
H4	Flat Washers 5/16"x19	22
H5	Allen Wrench	1
H6	"U" Metal Bracket	2
H7	"L" Metal Bracket	4


## DISCLAIMER:

WHEN PROPERLY ASSEMBLED, THIS ITEM IS SAFE FOR INTENDED USE. SELLER IS NOT LIABLE FOR ANY DAMAGES RESULTING FROM ITEM BEING IMPROPERLY ASSEMBLED AFTER PURCHASE.

## Assembly Procedures:


Step 1: Assemble the Bench on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach "L" Metal Bracket (H7) to Frame Legs (P2), (P3) as shown below. Don't tighten all bolts.

- (H2)x4 Bolts Ø5/16" x 3/4"L 
- (H3)x4 Lock Washers 5/16" 
- (H4)x4 Flat Washers 5/16"x19 
- (H5)x1 Allen Wrench 
- (H7)x4 "L" Metal Bracket 

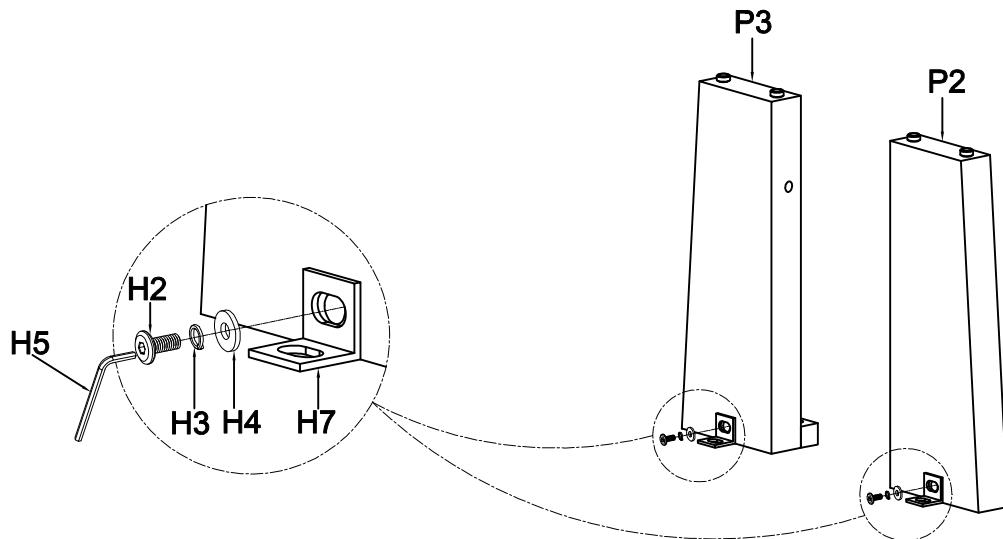


Step 2: Attach Leg Frame 1 (P2) and Leg Frame 2 (P3) to Seat Frame (P1) as shown below. Tighten all bolts.

(H1)x4 Bolts Ø5/16" x 1-3/4" L   
 (H2)x2 Bolts Ø5/16" x 3/4" L   
 (H3)x6 Lock Washers 5/16"   
 (H4)x6 Flat Washers 5/16"x19   
 (H5)x1 Allen Wrench 

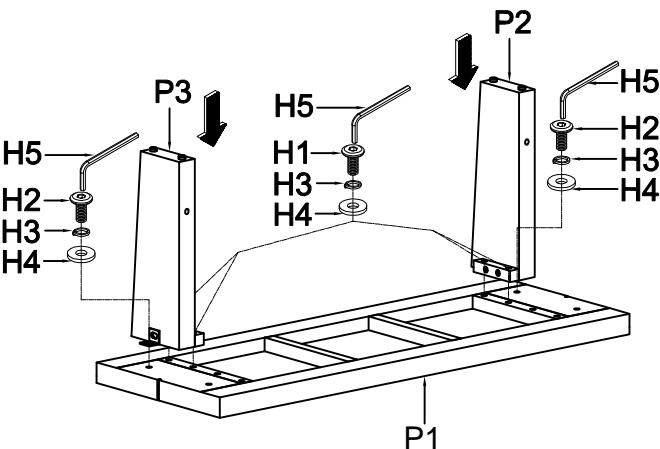


Step 3: Attach "U" Metal Bracket (H6) to Stretcher (P4) as shown below. Tighten all bolts.

(H2)x2 Bolts Ø5/16" x 3/4" L   
 (H3)x2 Lock Washers 5/16"   
 (H4)x2 Flat Washers 5/16"x19   
 (H5)x1 Allen Wrench   
 (H6)x2 "U" Metal 

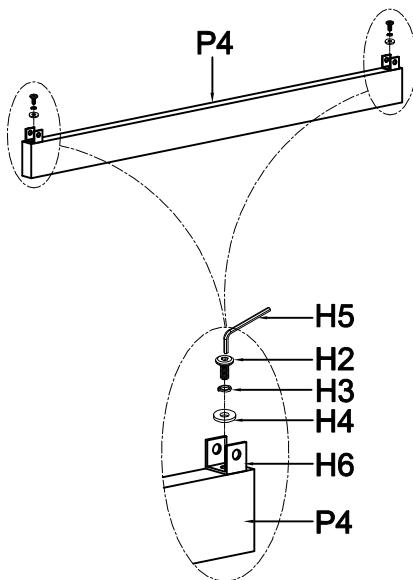


Step 4: Attach Stretcher (P4) to Frame Leg 1 (P2) and Frame Leg 2 (P3) as shown below. Tighten all bolts.

(H2)x2 Bolts Ø5/16" x 3/4" L   
 (H3)x2 Lock Washers 5/16"   
 (H4)x2 Flat Washers 5/16"x19   
 (H5)x1 Allen Wrench 

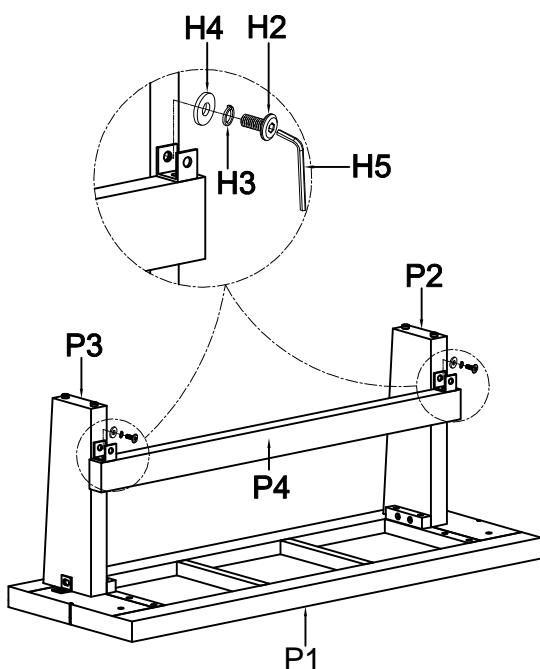


Step 5: Attach Leg Frame (P2), (P3) to Seat Frame (P1) as shown below. Don't tighten all bolts.

(H1)x4 Bolts Ø5/16" x 1-3/4" L   
 (H2)x2 Bolts Ø5/16" x 3/4" L   
 (H3)x6 Lock Washers 5/16"   
 (H4)x6 Flat Washers 5/16"x19   
 (H5)x1 Allen Wrench 

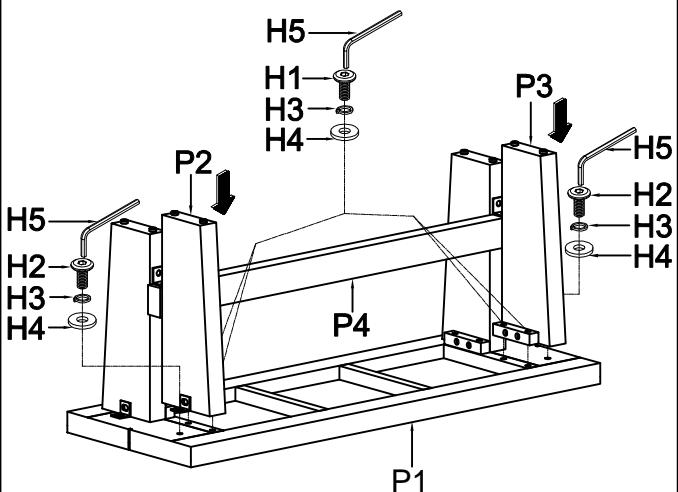


Step 6: Attach Stretcher (P4) to Frame Leg 1 (P2) and Frame Leg 2 (P3) as shown below. Tighten all bolts.

(H2)x2 Bolts Ø5/16" x 3/4" L   
(H3)x2 Lock Washers 5/16"   
(H4)x2 Flat Washers 5/16" x19   
(H5)x1 Allen Wrench 

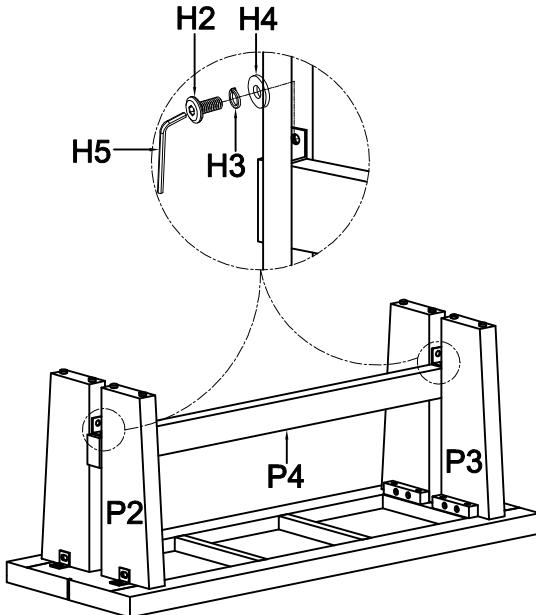

Step 7: Turn the assembled table to an upright position.

Assembly is completed.

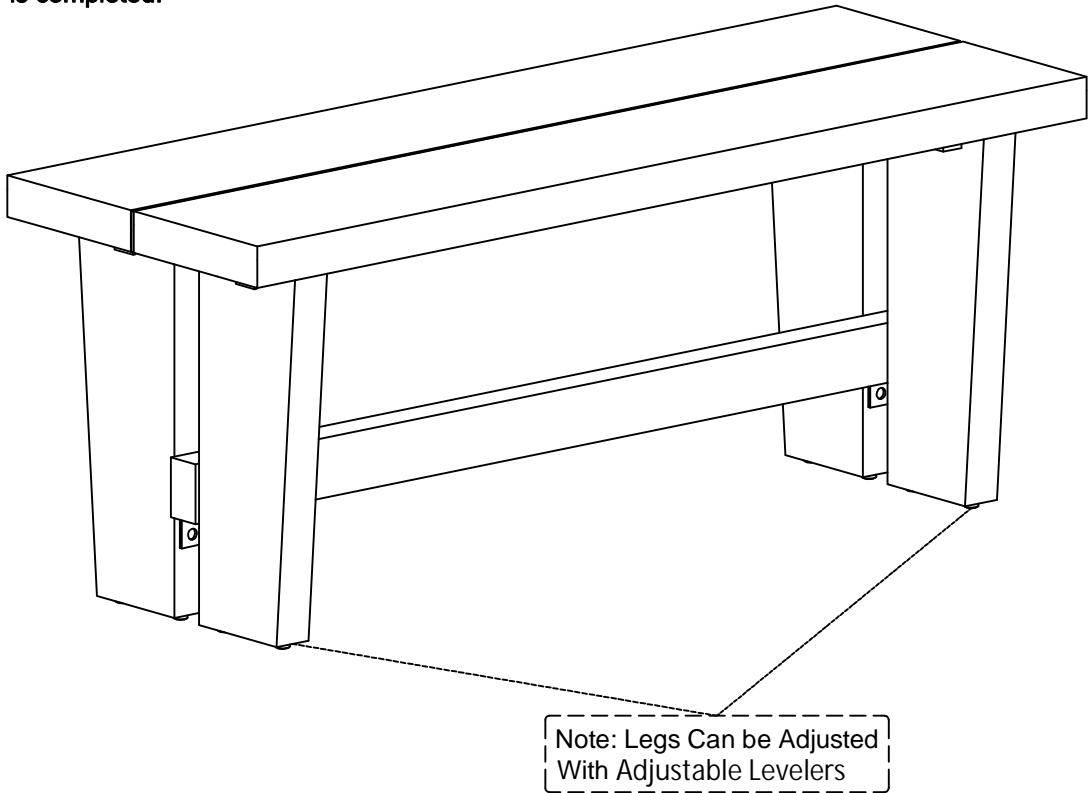

**ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO ENSURE THAT ALL HARDWARE IS KEPT TIGHTENED.**

Thank you for your purchase