

ASSEMBLY INSTRUCTIONS

Description: Console Table

Important safety instructions:


- Please carefully read all instructions before assembling the table.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description		QTY
A	Left Side Frame with Label "Back"		1
B	Right Side Frame		1
C	Shelf Frame		1
D	Top Panel with Label "Back"		1
E	Back Stretcher		1
F	Self Glass		1

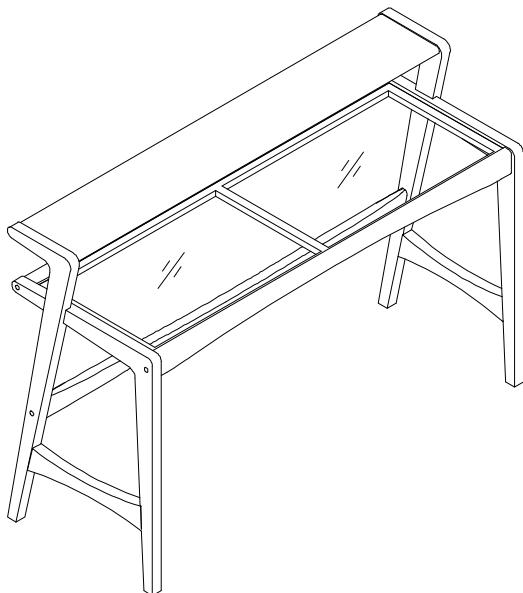

Hardware List

Item	Description		QTY
a	Bolts Ø1/4" *1-1/2"		6
b	Lock Washers Ø1/4"		10
c	Flat Washers Ø1/4" *12mm		6
d	Allen Wrench 1/4"		1
e	Threaded Rod Ø1/4"		4
f	Nuts Ø1/4"		4
g	Half-round Washer 1/4"		4
h	Open Wrench 1/4"		1
i	Wooden Plugs		6
j	Clear Plastic Pad		6

Assembly Procedures:


Step 1. Assemble the table on a flat, soft surface such as a carpet or cloth to prevent scratching the finish.

- 1) Screw the Threaded Rod (e) into the left side frame (A) following the label "L" on the left side frame .
- 2) Attach the shelf frame (C), top panel (D) and back stretcher (E) to the left side frame (A) and make sure the label "Back" on the top panel (D) and the label "Back" on the side frame (A) on same side as shown below.

Loosely tighten all bolts with Allen wrench (d) and open wrench (h).

(a)x3	Bolts Ø1/4"**1-1/2"	
(b)x5	Lock Washers Ø1/4"	
(c)x3	Flat Washers Ø1/4"**12mm	
(d)x1	Allen Wrench 1/4"	
(e)x1	Threaded Rod Ø1/4"	
(f)x2	Nuts Ø1/4"	
(g)x2	Half-round Washer 1/4"	
(h)x1	Open Wrench 1/4"	

Caution: Make sure the label "Back" on same side.

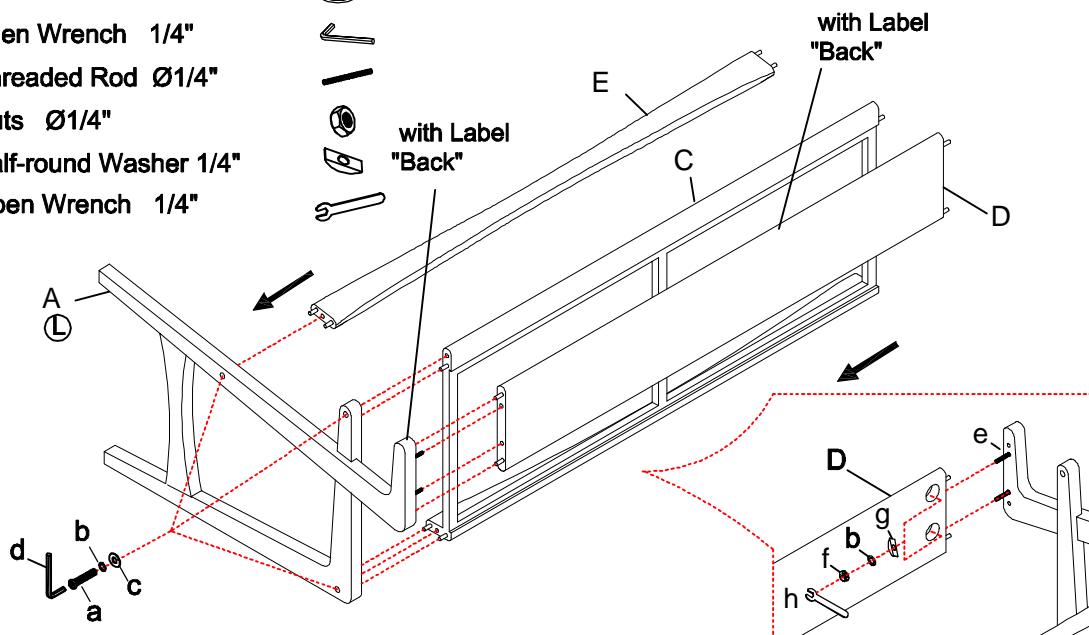


Step 2.

- 1) Screw the Threaded Rod (e) into the right side frame (B) following the label "R" on the left side frame .
- 2) Attach the right side frame (B) to shelf frame (C), top panel (D) and back stretcher (E) as shown below.

Loosely tighten all bolts with Allen wrench (d) and open wrench (h).


(a)x3	Bolts Ø1/4"**1-1/2"		(e)x1	Threaded Rod Ø1/4"	
(b)x5	Lock Washers Ø1/4"		(f)x2	Nuts Ø1/4"	
(c)x3	Flat Washers Ø1/4"**12mm		(g)x2	Half-round Washer 1/4"	
(d)x1	Allen Wrench 1/4"		(h)x1	Open Wrench 1/4"	

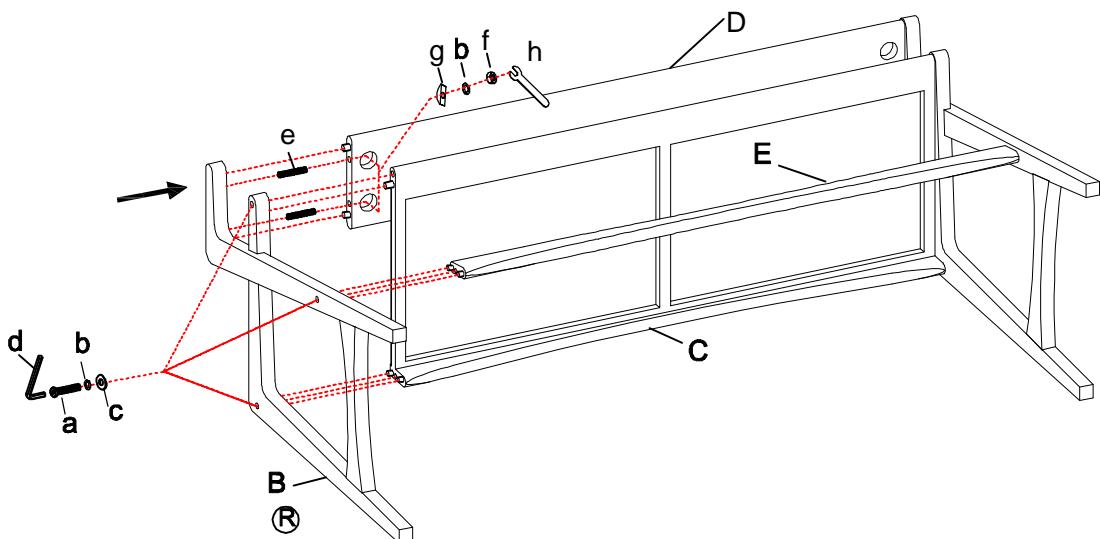

Step 3.

- 1) Turn the assembled table to an upright position. Securely tighten all bolts with Allen wrenches (d) and open wrench (h).
- 2) Attach wooden plugs (i) to each exposed bolt hole, tighten with rubber hammer to knock the wooden plug till its tighten. Note: use a soft cloth between the wooden plug and hammer to prevent damage to wooden plug finish.

(i)x6 Wooden Plugs

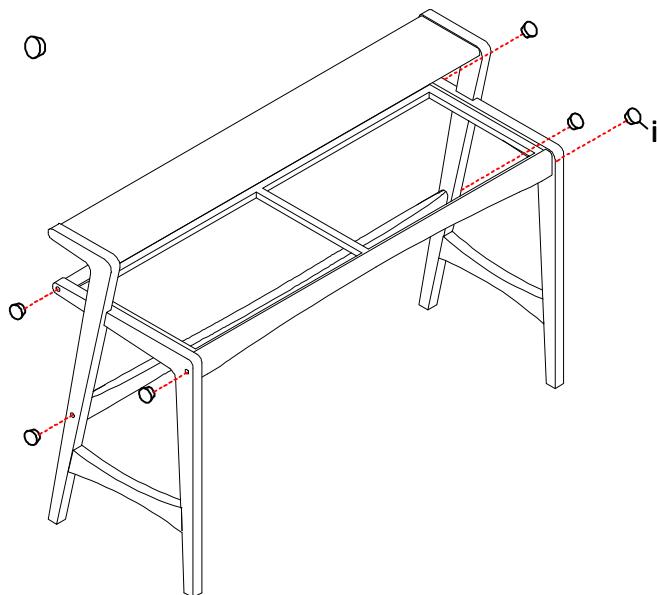


Step 4. Recommend that you attach the products to your wall as a safety precaution. Please see the other instructions "Furniture Safety Bracket Tip Resistant".

Step 5.

- 1) Place the clear plastic pad (j) on the shelf frame (C) as shown below.
- 2) Carefully take the glass out from its carton, then gently lay the shelf glass (F) on the assembled shelf frame (C) as shown below.
- 3) Assembly is complete. Failure to follow these instructions may cause the bolts to misalign during assembly.

(j)x6 Clear Plastic Pad

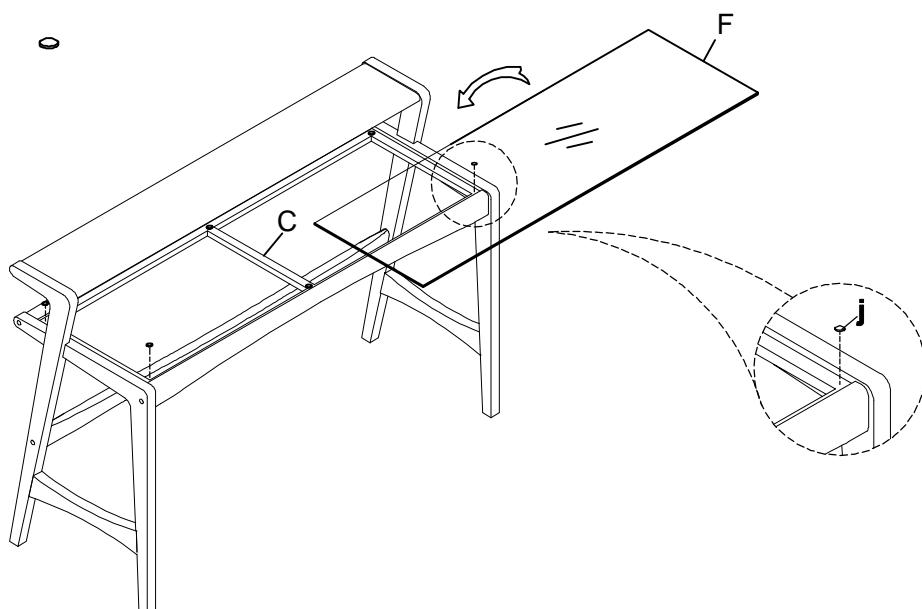

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase

Furniture Safety Bracket Tip Resistant

- Designed to help prevent furniture tipover.
- Detachable strap allows for easy moving of furniture for cleaning.
- Also helps prevent furniture tipover during minor tremore.

Installation:

Short Screw (1pcs)




Long Screw (1pcs)



Strap (1pcs)




Bracket (2pcs)




1. Locate a wall stud behind your furniture. Position a bracket on the stud approximately 1" below the top frame of the furniture. Mark and drill pilot hole into the center of the stud with a 3/32" drill bit. Attach a bracket to the stud with the long screws provided.



2. On the back of the furniture, a bracket will need to be attached to the furniture frame at the top. To do this, temporarily move the furniture into its final position and mark the location of the wall bracket on the furniture frame. Move the furniture away from the wall and place a bracket on the mark. Mark and drill holes for screws with a 3/32" drill bit. Attach the bracket to the furniture with the short screws provided.

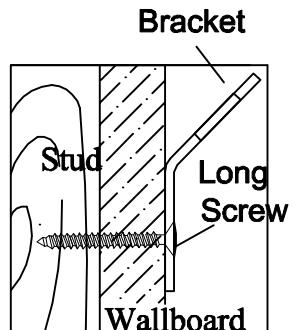

3. Move the furniture into its final position, taking care to line up the wall bracket with the furniture bracket. Thread a strap through the bracket as shown in the illustration. Tighten strap until snug. Do not overtighten.

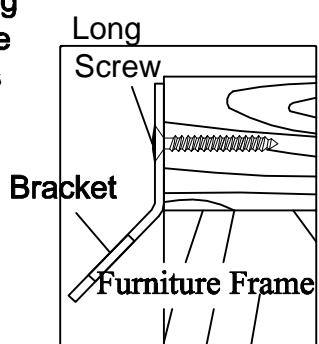

Important:

Check to be sure the wall bracket is firmly screwed into wall stud, the furniture bracket is firmly attached to the frame, and the strap is snug.

Caution:

This product is not to be a substitute for proper parental supervision. Manufacturer assumes no liability for improper installation or excessive loads placed on screws brackets or straps.

