

ASSEMBLY INSTRUCTIONS

Description: Kelly Bar Cart

Important safety instructions:


- Please carefully read all instructions before assembling.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description	QTY
P1	Metal Arm Frame	
P2	Metal Rail	
P3	Top Shelf with Cane	
P4	Bottom Shelf	
P5	Glass	

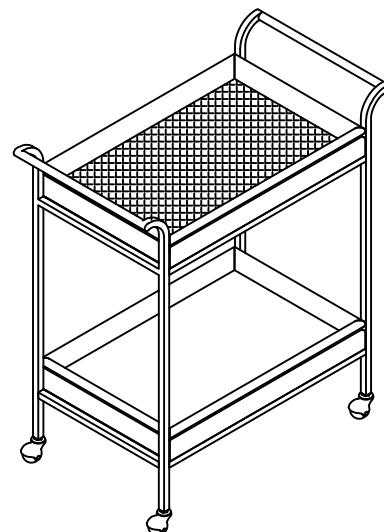
**Hardware List**

Item	Description	QTY
H1	Bolts Ø1/4" * 1/2"	
H2	Lock Washers 1/4"	
H3	Flat washers 1/4" (12mm)	
H4	Allen Wrench 1/4"	
H5	Screws 8# * 3/4"	
H6	Rubber Pad Ø10*30mm	

Assembly Procedures:


Step 1. Assemble the bar cart on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Loosely attach metal rail (P2) to the metal frame (P1). Loosely tighten by Allen wrench (H4) .

(H1)x16 Bolts
 (H2)x16 Lock washers
 (H3)x16 Flat washers
 (H4)x1 Allen wrench

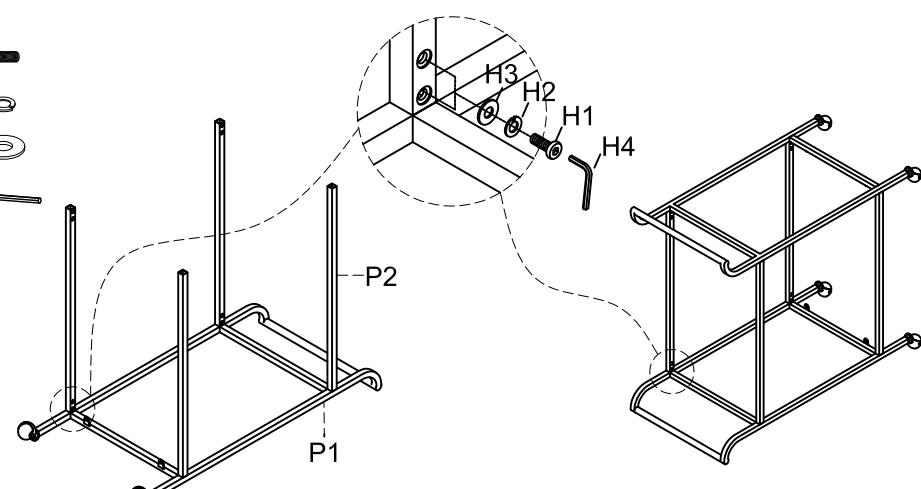

Step 2. Loosely attach bottom shelf (P4) to assembled metal frame(P1) using screws (H5). Loosely tighten by screwdriver (not provided).



(H5)x4 Screws 8#*3/4"

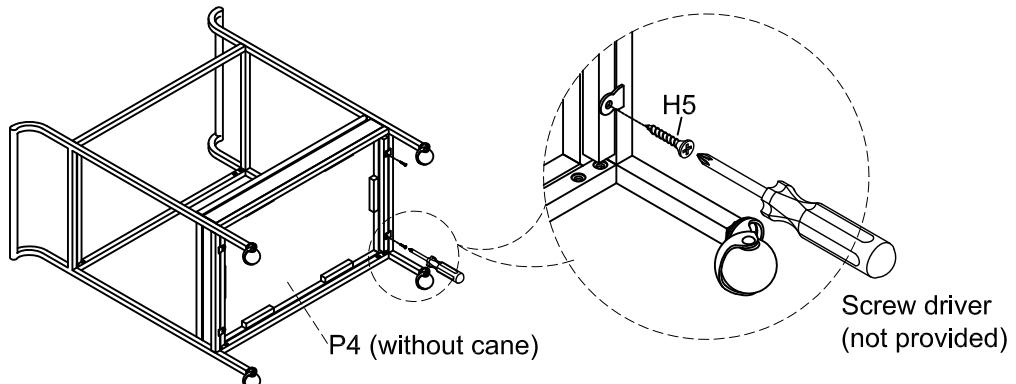

Step 3.

- 1) Turn the assembled bar cart to an upright position
- 2) Put the rubber pad (H6) on top shelf (P3) as shown below, then gently lay glass (P5) on the rubber pad(H6).
- 3) Lay the assembled top shelf (P3) on the assembled bar cart. Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

(H6)x6 Rubber Pad

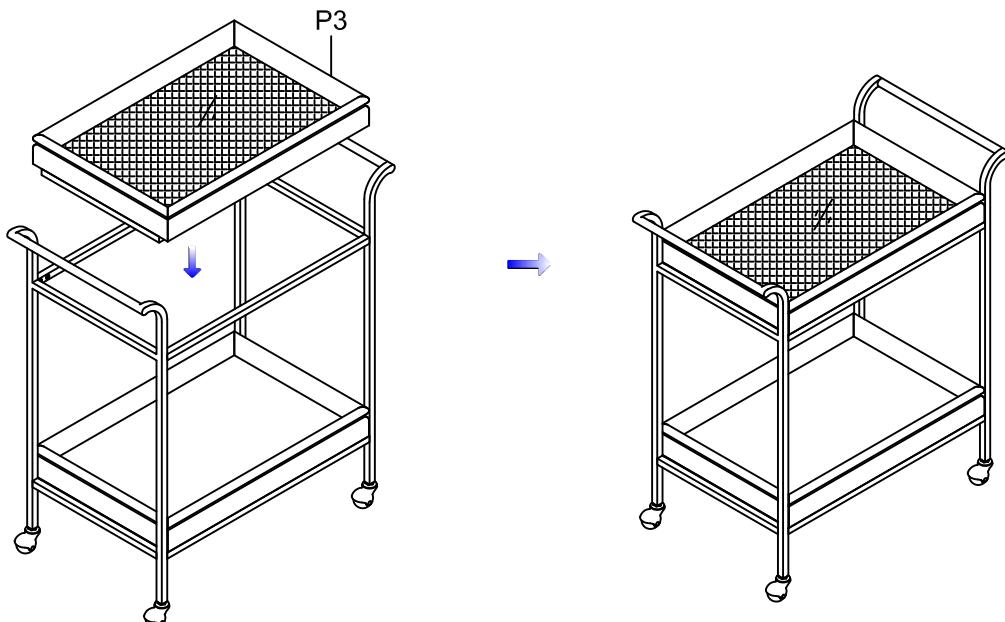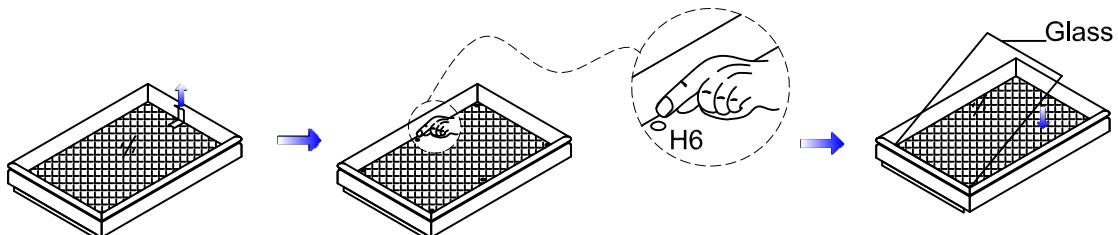

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.