

## Description: Loveseat

## Important safety instructions:


- Please carefully read all instructions before assembling the loveseat.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

## Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

## Parts List

Item	Description	QTY
A	Right Leg	1
B	Left Leg	1
C	Back Cushion	1
D	Seat Cushion	1
E	Back Frame	1
F	Seat Frame	1
G	Stretcher	1
H	Center Foot	1

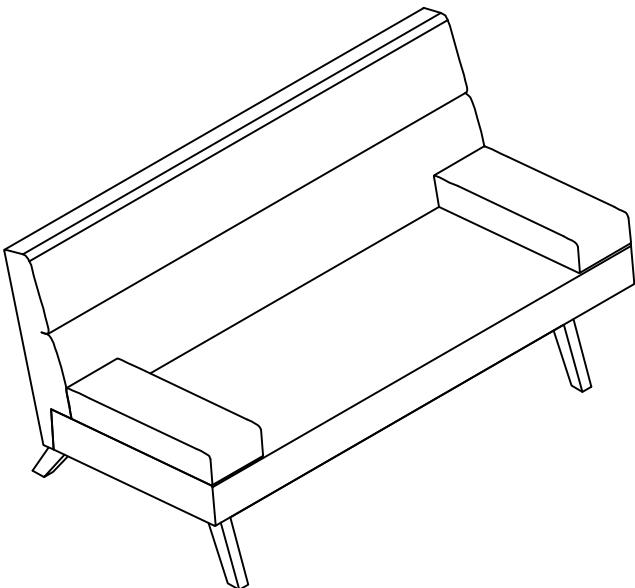


## Hardware List

Item	Description	QTY
a	Bolt Ø1/4"**1-1/4"	1
b	Bolts Ø1/4"**1-1/2"	8
c	Bolts Ø1/4"**2-1/2"	8
d	Lock Washers 1/4"	19
e	Flat washers 1/4" *12mm	10
f	Flat washers 1/4" *22mm	5
g	Allen Wrench 1/4"	1
h	Wooden Plugs	2
i	Screws #8*1-1/2"	2
j	Bolts Ø1/4"**1-3/4"	2
k	Flat washers 1/4" *16mm	4


**Assembly Procedures:**

Step 1. Assemble the loveseat on a flat, soft surface such as a carpet or cloth to prevent scratching the finish.

- 1) Attach seat frame (F) and back frame (E) to the right leg (A) using bolts (b), lock washers (d) and flat washers (e) according to the label "R" on the right leg (A), loosely tighten the bolts by Allen wrench (g) as shown below.
- 2) Insert the the stretcher (G) to the right leg (A).

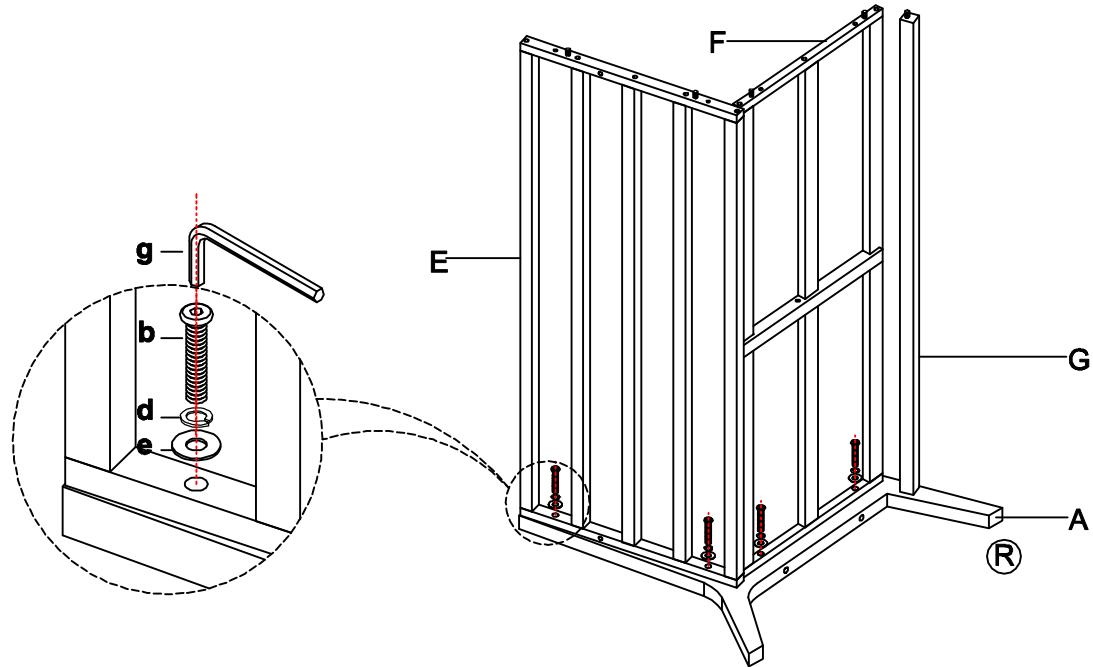


Step 2. Attach left leg (B) to the assembled stretcher (G), seat frame (F) and back frame (E) using bolts (b), lock washers (d) and flat washers (e) according to the label "L" on the left leg (B). Loosely tighten the bolts by Allen wrench (g) as shown below. Do not tight the screws at this time.

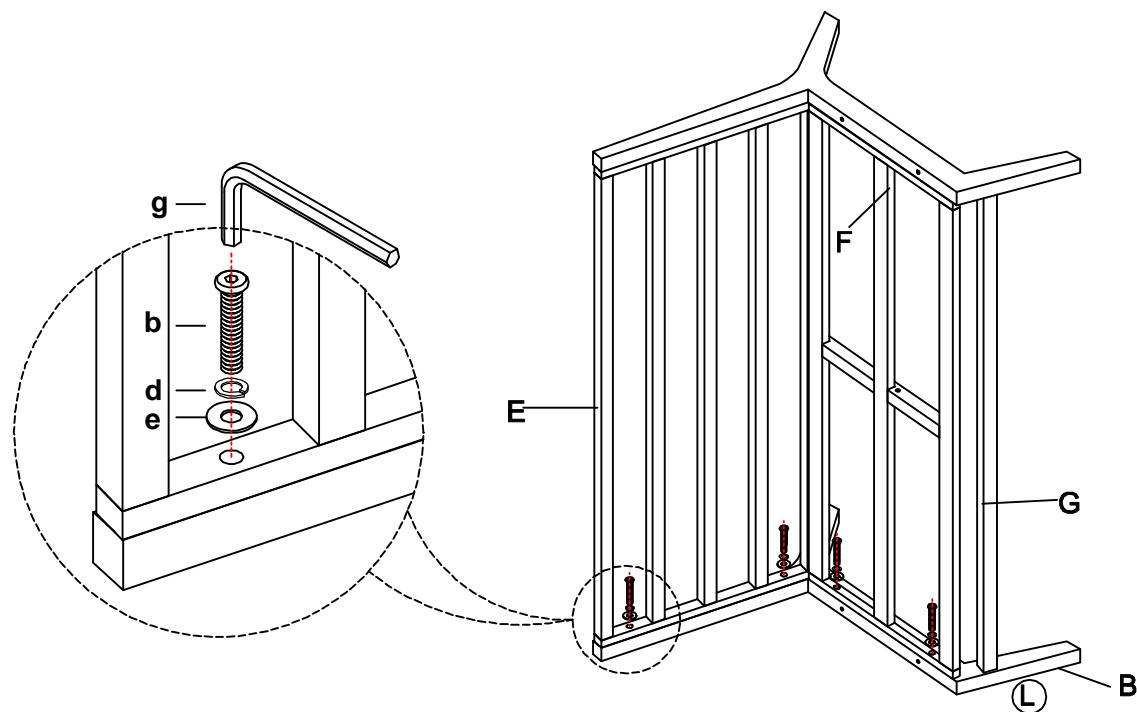


Step 3.

1), Securely tighten all bolts with Allen wrench (g), but do not over tighten the bolts. Tighten screws (i) through the stretcher (G) to the legs (A) & (B) with screwdriver (not provided).

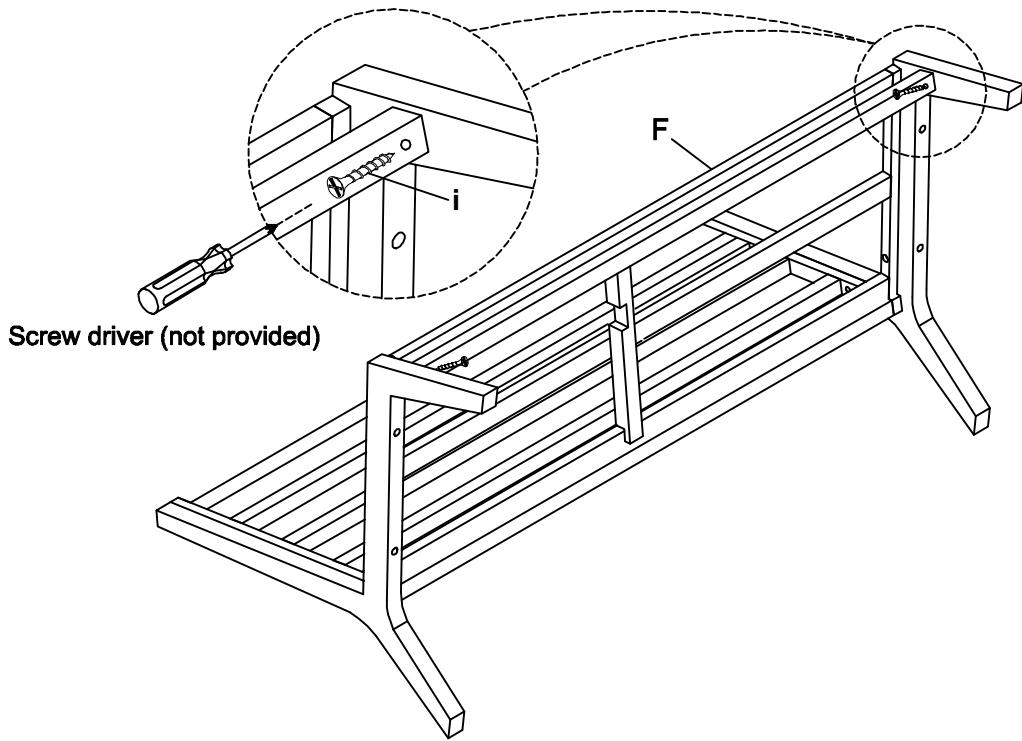


Step 4. Attach the seat cushion (D) to the back cushion (C) using bolts (c), lock washers (d) and flat washers(f). Loosely tighten the bolts by Allen wrench (g).

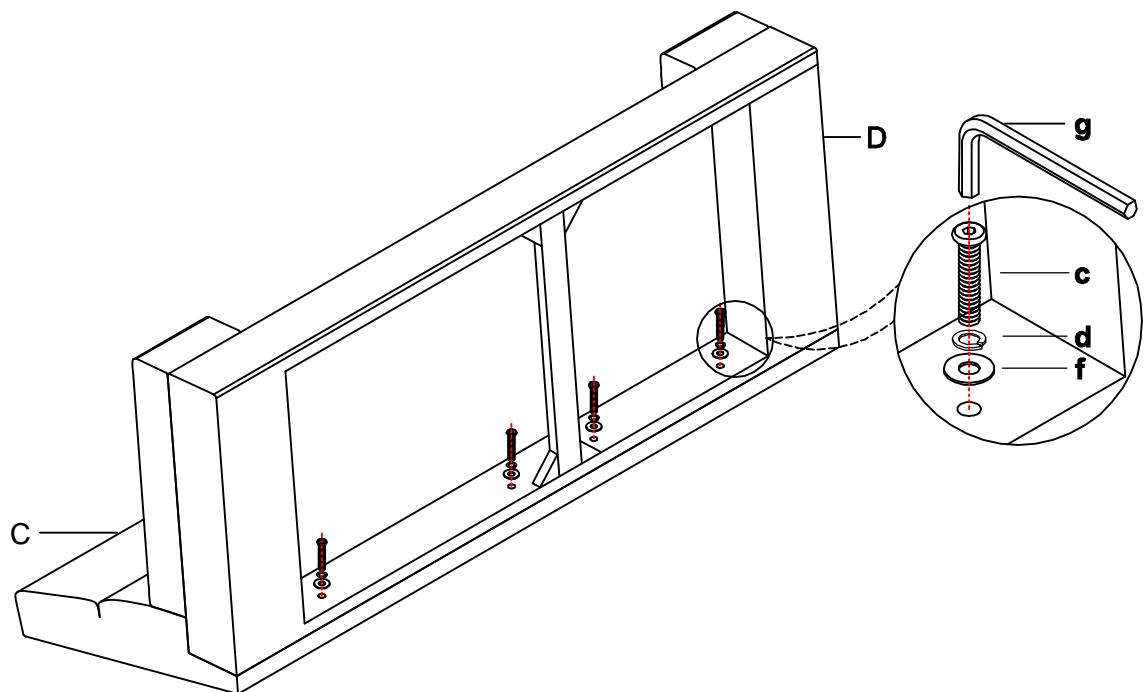

Step 5. Loosely attach the assembled back frame (E) to the assembled back cushion (C) using bolts (j), lock washers (d) and flat washers (e) as shown below . Loosely tighten the bolts by Allen wrench (g).

2) Attach the center foot (H) to the bottom of seat frame (F) using bolts (a), lock washers (d) and flat washers (f).

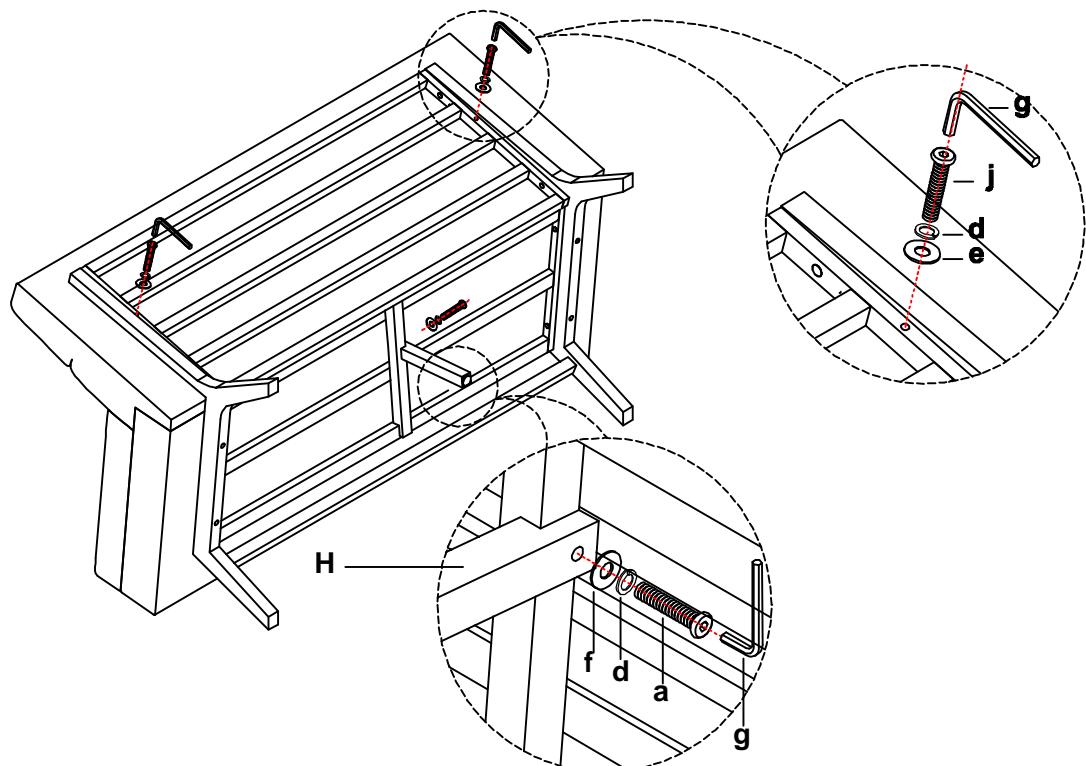


Step 6.

1), Attach the assembled legs (A and B) to the assembled seat cushions (D) using bolts (c), lock washers (d) and flat washers (k) as shown below. Loosely tighten by Allen wrench (g).

2), Securely tighten all bolts by Allen wrench (g), but do not over tighten the bolts. Then attach wooden plugs (h) to each bolt hole, tighten with rubber hammer to knock the wooden plug till its tighten. Note: use a soft cloth between the wooden plug and hammer to prevent damage to wooden plug finish.

3) Turn the assembled loveseat to an upright position. Assembly is complete.

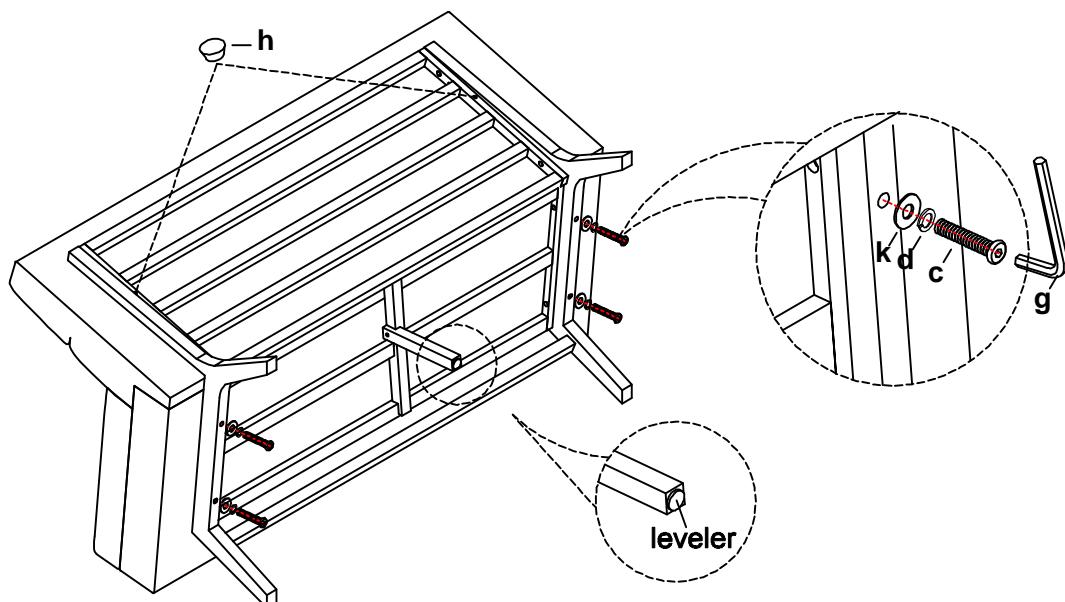

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase