

# ASSEMBLY INSTRUCTIONS

## Description: Lounge





### Important safety instructions:

- Please carefully read all instructions before assembling the lounge.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.






### Pre-assembly:


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

### Parts List

Item	Description	QTY
A	Seat Cushion 	1
B	Back Top Cushion 	1
C	Left Arm  Ⓛ	1
D	Right Arm  Ⓡ	1



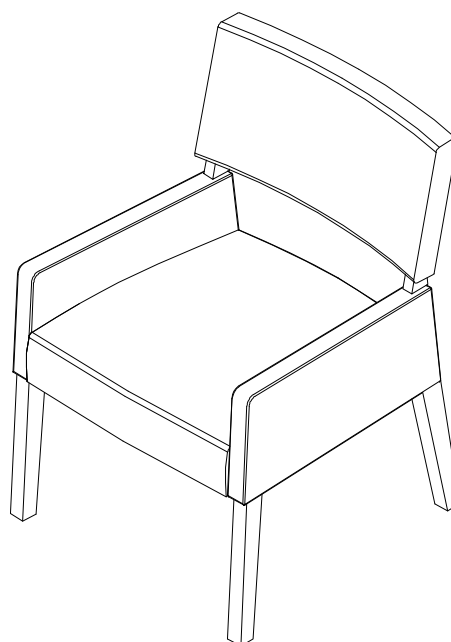

### Hardware List


Item	Description	QTY
a	Bolts Ø5/16*1-3/4" 	8
b	Lock Washers 5/16" 	8
c	Flat Washers 5/16" *19mm 	8
d	Allen Wrench 5/16" 	1
e	Wood Screws #8*1" 	4






### Assembly Procedures:


**Step 1.** Assemble the lounge on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach seat cushion (A) to left arm (C) according to the label "L" on the left arm as shown below. Securely tighten all bolts with Allen wrench (d) .

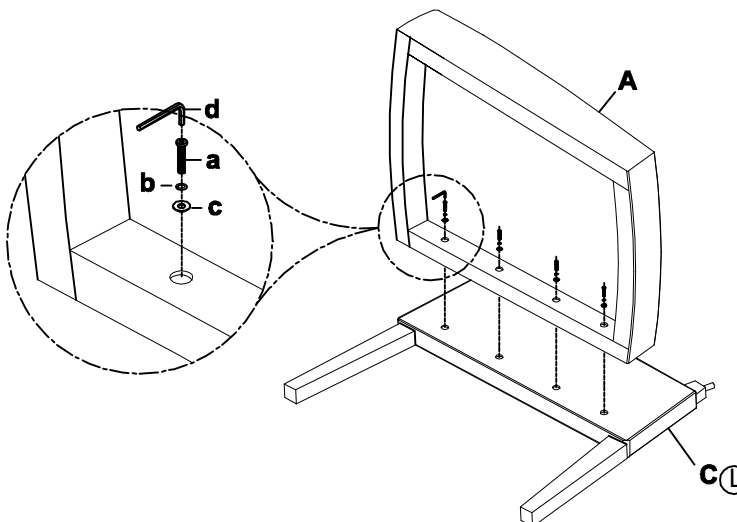- (a) x 4   
Bolts Ø5/16\*1-3/4"
- (b) x 4   
Spring Washers 5/16"
- (c) x 4   
Flat Washers 5/16" \*19mm
- (d) x 1   
Allen Wrench 5/16"



Step 2. Loosely attach the assembled seat cushion (A) and left arm (C) to the right arm (D) according to the label "R" on the right arm. Securely tighten all bolts with Allen wrench (d).


- (a) x 4   
**Bolts Ø5/16\*1-3/4"**  
 (b) x 4   
**Spring Washers 5/16"**  
 (c) x 4   
**Flat Washers 5/16" \*19mm**

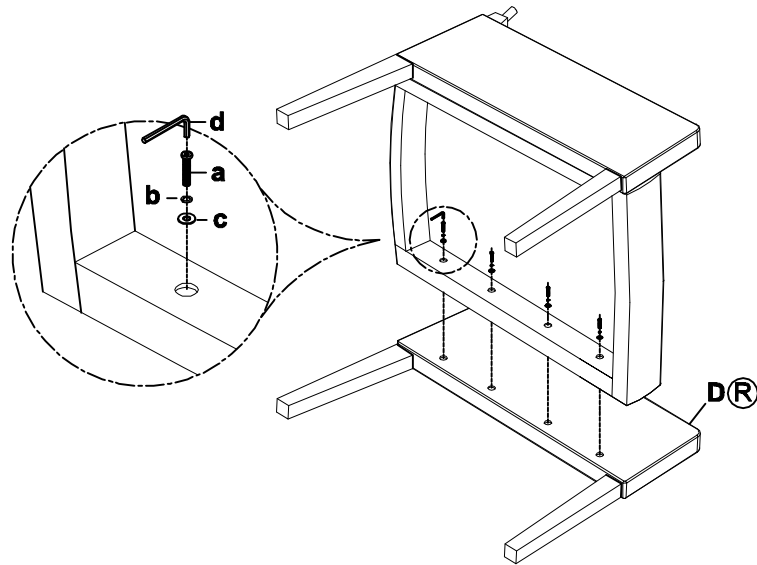

Step 3. Securely tighten all the bolts with Allen wrench (d).

- 1) Turn the assembled lounge to an upright position.
- 2) Then attach the back top cushion (B) to the assembled left arm (C) and right arm (D) aligning holes on the bottom of back top cushion with the metal bars (e) on the left arm (C) and right arm (D), tighten wood screws (e) through the metal bars on the bottom of back top cushion (B) with screwdriver(not provided).
- 3) Assembly is complete.

- (e)x4 **Screws #8\*1"** 

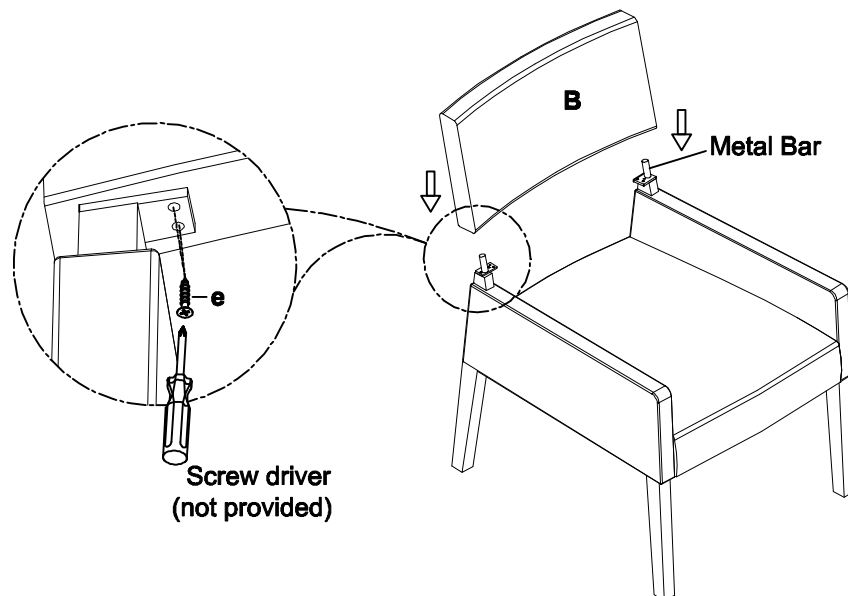

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

**Thank you for your purchase**