

Description: Counter Stool**Important safety instructions:**


- Please carefully read all instructions before assembling the counter stool.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

| Item | Description | QTY |
|------|-----------------|-----|
| A | Bar Stool Back | 2 |
| B | Seat Cushion | 2 |
| C | Front Left Leg | 1 |
| D | Front Right Leg | 1 |
| E | Left Stretcher | 1 |
| F | Right Stretcher | 1 |
| G | Front Stretcher | 1 |

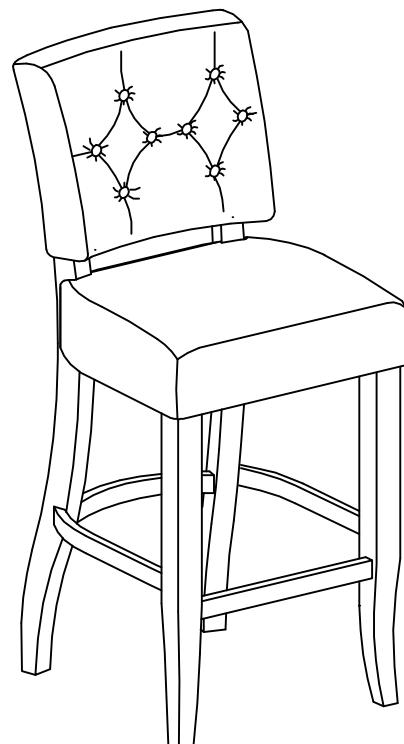
**Hardware List**

| Item | Description | QTY |
|------|----------------------|-----|
| a | Bolts Ø5/16"**2-1/2" | 4 |
| b | Bolts Ø5/16"**2" | 4 |
| c | Flat Washers Ø5/16" | 8 |
| d | Lock Washers Ø5/16" | 8 |
| e | Allen Wrench Ø5/16" | 1 |
| f | Screws #8*1-1/4" | 6 |

Assembly Procedures:


Step 1. Assemble the counter stool on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the seat cushion (B) to the counter stool back (A). securely tighten all bolts with Allen wrench (e).

- (a)x4 Bolts
- (c)x4 Lock Washers
- (d)x4 Flat Washers
- (e)x1 Allen Wrench

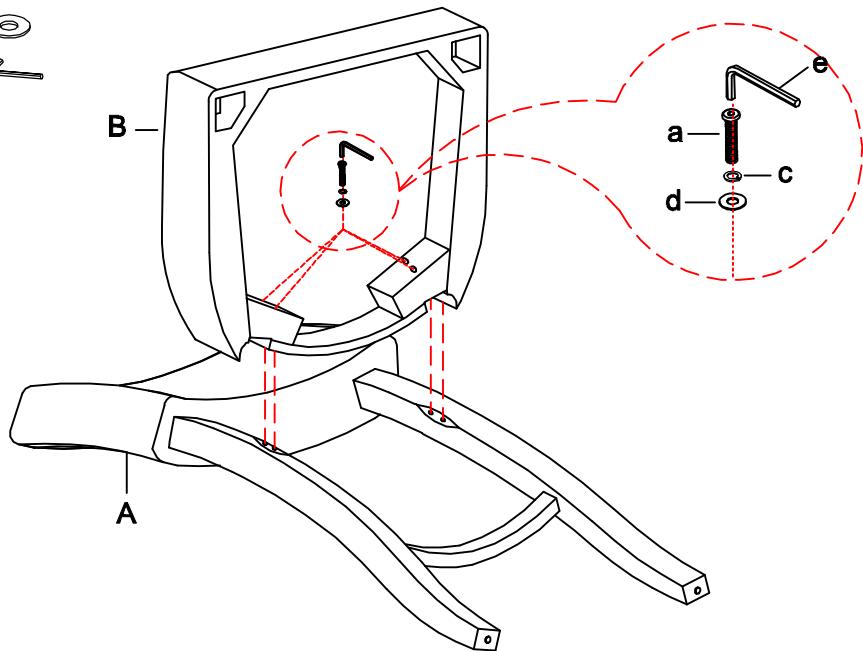

Step 2. Insert the left stretcher (E) to the leg of counter stool back (A) according to the label "L" at the hole in the leg of bar stool back and the front end of left stretcher (E). Loosely attach the front leg (C) to the bottom of seat cushion (B) and the left stretcher (E) according to the label "L" as shown below. Securely tighten all bolts with Allen wrench (e). Do not tighten the bolts at this time.

- (b)x2 Bolts
- (c)x2 Lock Washers
- (d)x2 Flat Washers

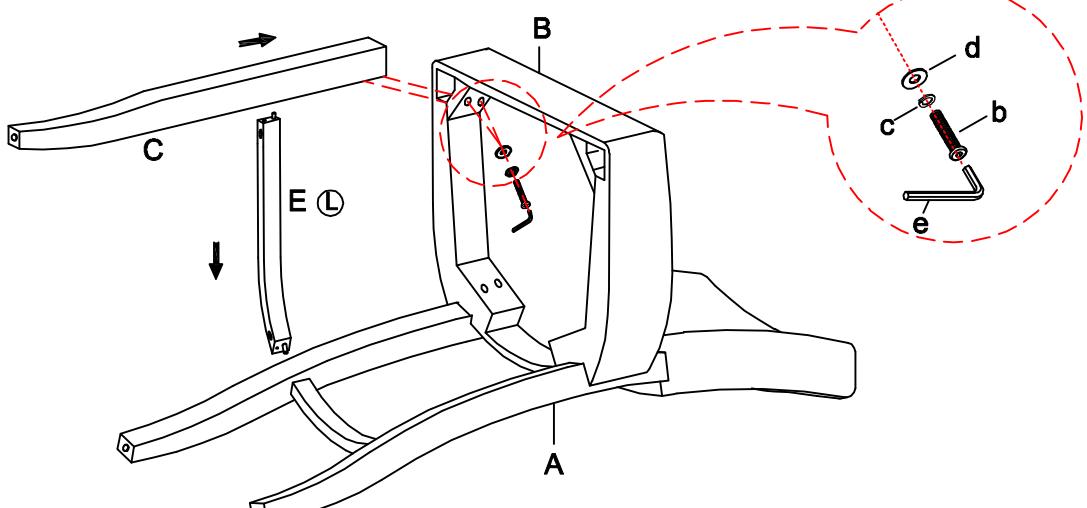

Step 3.


- 1) Insert the right stretcher (F) to the leg of counter stool back (A) according to the label "R" at the hole in the leg of bar stool back and the front end of right stretcher (F). Loosely attach the front leg (D) to the seat (B) according to the label "R" as shown below. Securely tighten all bolts with Allen wrench (e).
- 2) Insert the front stretcher (G) between the front legs.
- 3) Securely tighten all bolts , but do not over tighten the bolts.
- 4) Tighten all screws (f) through the stretchers (E, F, G) to the front legs and bar stool back legs with screw driver(not provided).

(b)x2 **Bolts** 


(c)x2 **Lock Washers** 

(d)x2 **Flat Washers** 

(f)x6 **Screws** 

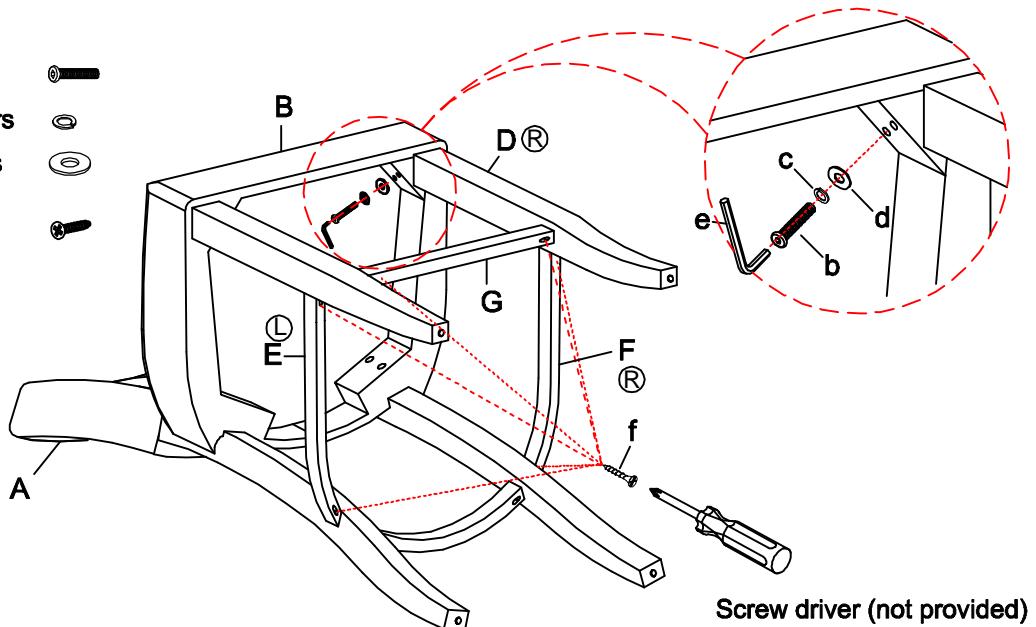

Step 4. Turn the assembled bar stool to an upright position. Securely tighten all bolts with Allen wrench (e). Assembly is complete.

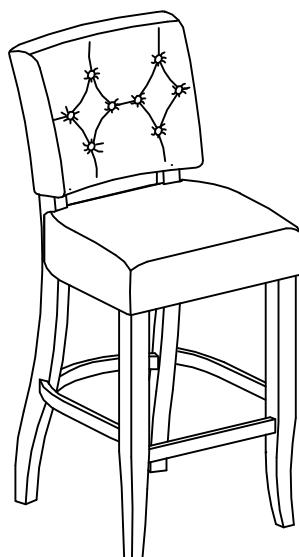

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase