

ASSEMBLY INSTRUCTIONS

Description: Lounge Chair

Important safety instructions:


- Please carefully read all instructions before assembling the lounge.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description	QTY
A	Left Side Metal Frame	1
B	Right Side Metal Frame	1
C	Front Rail	1
D	Back Bottom Rail	1
E	Back Top Rail	1
F	Back Cushion	1
G	Seat Cushion	1

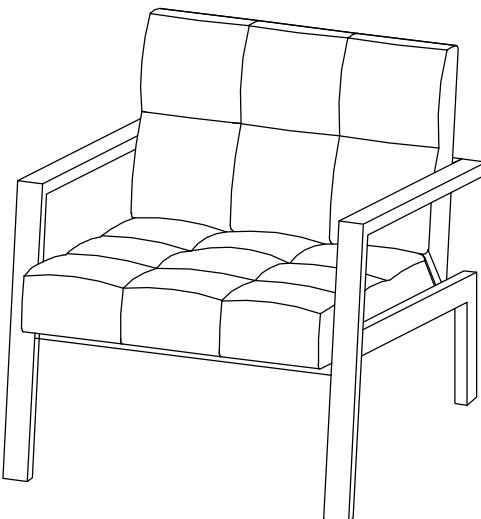


Hardware List


Item	Description	QTY
a	$\frac{1}{2}$ "L Short Bolts $\frac{1}{2}'' * \text{Ø}1/4''$	12
b	1"L Medium Bolts $1'' * \text{Ø}1/4''$	4
c	$1\frac{1}{8}$ "L Long Bolts $1\frac{1}{8}'' * \text{Ø}1/4''$	2
d	$2\frac{3}{8}$ "L The Longest Bolts $2\frac{3}{8}'' * \text{Ø}1/4''$	2
e	Lock Washers $\text{Ø}1/4''$	8
f	Flat Washers $\text{Ø}1/4''$	8
g	Allen Wrench 4mm	1

Assembly Procedures:


Step 1. Assemble the lounge chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach left side metal frame (A) and right side metal frame (B) to front rail (C), back bottom rail (D) and back top rail (E) aligning insert the insert bar on side metal frames (A & B) to the end of rails (C,D,E), do not tighten the bolts at this time.

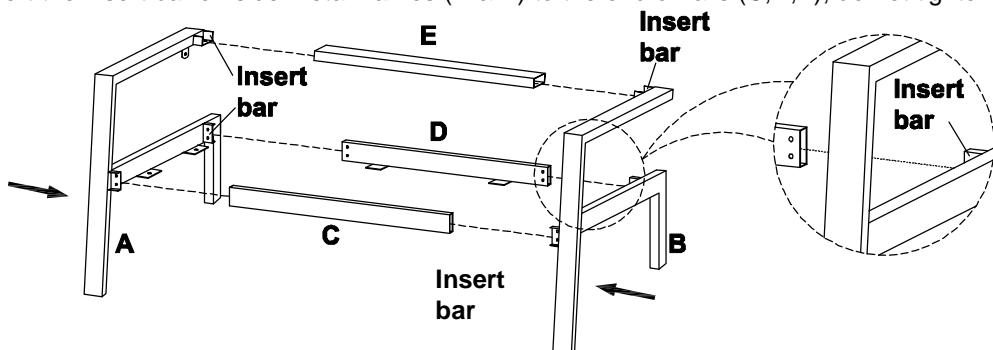


Step 2. Use $\frac{1}{2}$ "L short Bolts (a) to attach left side metal frame (A) and right side metal frame (B) to front rail (C), back bottom rail (D) and back top rail (E). Securely tighten all bolts with Allen wrench (g).

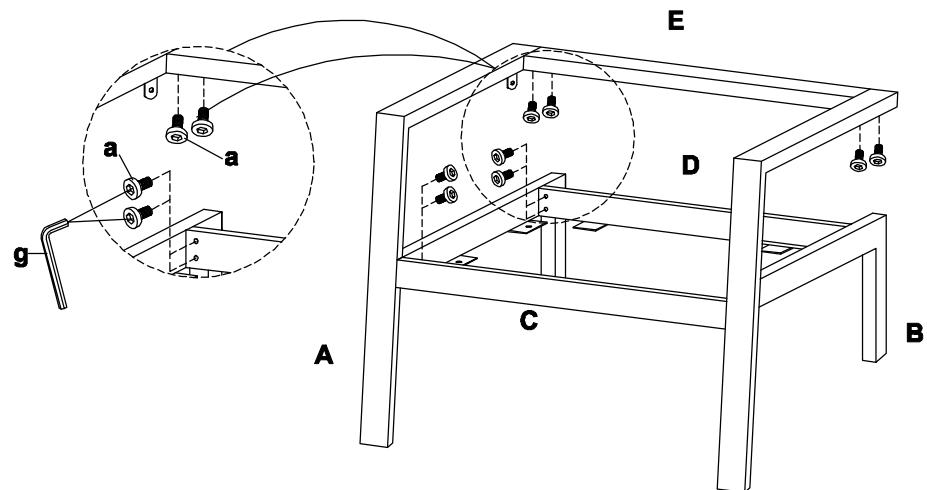

Step 3. Open the bottom covering and attach the seat cushion (G) to the back cushion (F) using 2 $\frac{3}{8}$ "L the Longest bolt (d), lock washers (e) and flat washers (f) as shown below. Securely tighten all bolts with Allen wrench (g).

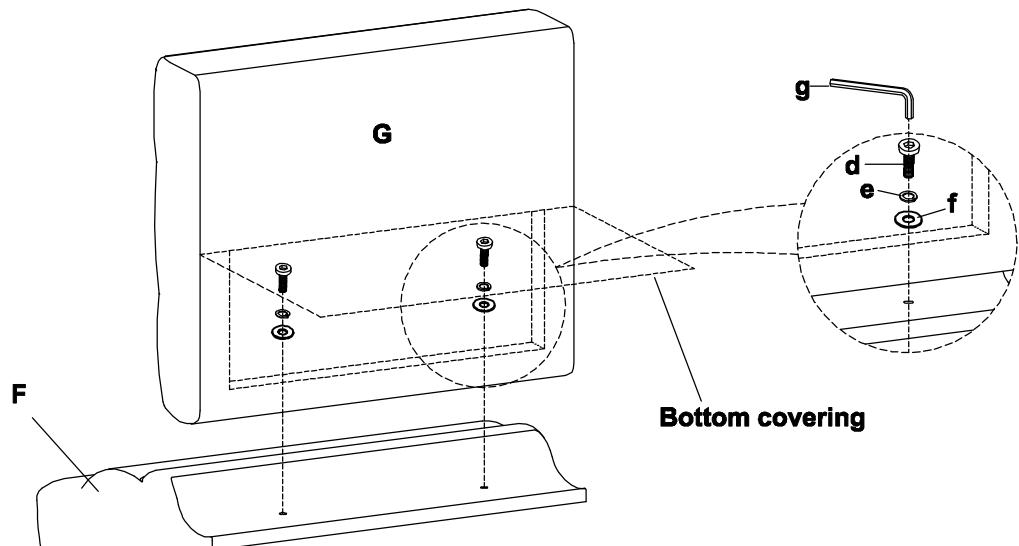


Step 4. Lift the assembled seat cushion (G) and back cushion (F) by two or more adults is recommended. Attach the bottom of seat cushion (G) on the left side metal frame (A) and right side metal frame (B) using 1" L medium bolts (b), lock washers (e) and flat washers (f). Loosely tighten all the bolts with Allen wrench (g).

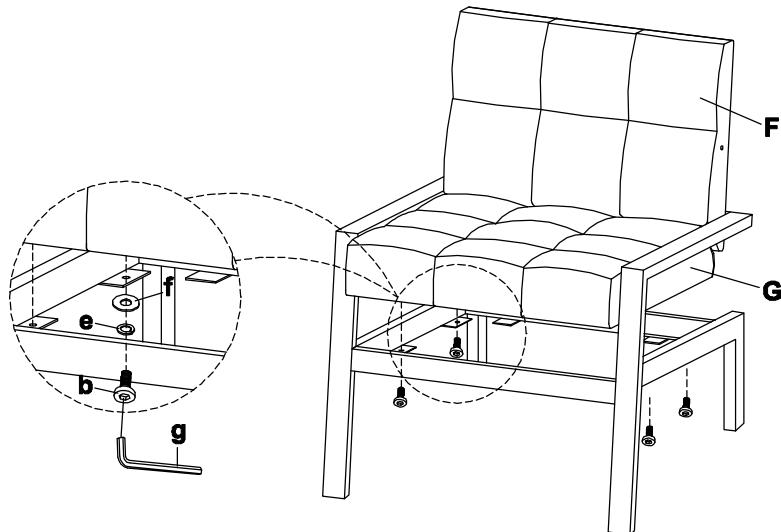

Step 5.

- 1) Attach the back cushion (F) to the left side metal frame (A) and right side metal frame (B) using $1\frac{1}{8}$ "L long Bolts (c), lock washers (e) and flat washers (f). Loosely tighten all bolts with Allen wrench (g).
- 2) Securely tighten all bolts with Allen wrench (g). Assembly are complete. Failure to follow these instructions may cause the bolts to misalign during assembly.

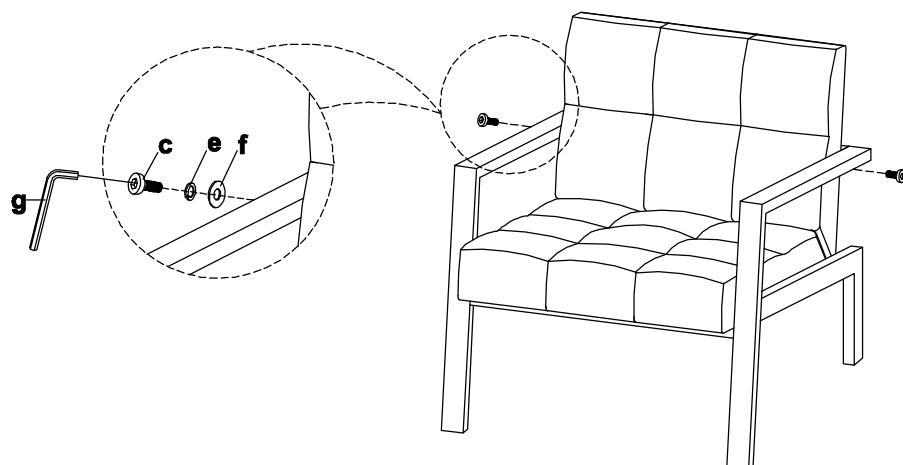

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase