

Step 2. Loosely attach table top (P1) to post attached mounting plate (P2, P3) using bolts (H1), lock washers (H2) and flat washers (H3) as shown below.

(H1)x4 Bolts




(H2)x4 Spring Washers



(H3)x4 Flat Washers




(H4) Allen Wrench

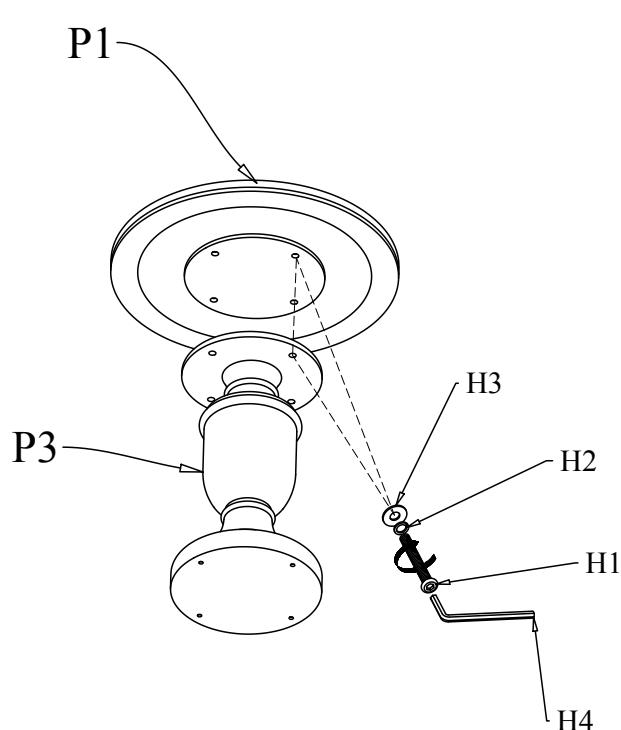

Step 3.

1) Securely tighten all bolts with Allen wrench (H4). Turn the assembled table to an upright position.

2) Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

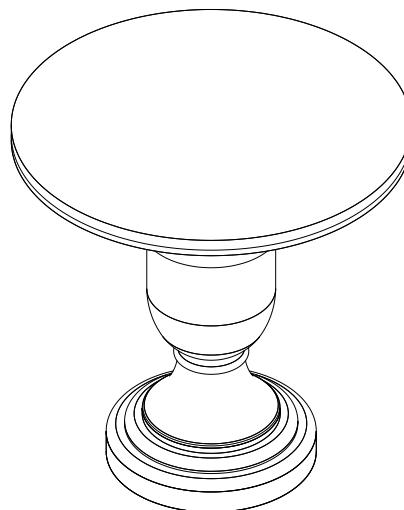

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO ENSURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase