

ASSEMBLY INSTRUCTIONS

Description : Counter & Bar Stool







Important safety instructions:


- Please read carefully all instructions before assembling the stool.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:








- Do not discard any content until assembly completed to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardwares from box.

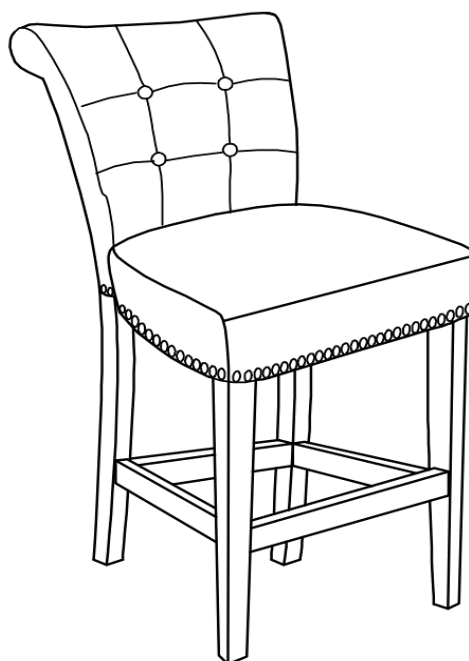Parts List

Item	Description		QTY
A	Stool Back		1
B	Seat Cushion		1
C	Left Stretcher		1
D	Right Stretcher		1
E	Front Stretcher		1
F	Front Legs		2




Hardware List

Item	Description		QTY
a	Long Bolts Ø5/16"*3"		4
b	Short Bolts Ø5/16"*2"		5
c	Lock Washers 5/16"		9
d	Flat Washers 5/16"		9
e	Allen Wrench 5/16"		1
f	Screw #8*1-3/4"		6
g	Screwdriver		1


**Not provided

Assembly Procedures:


Step 1. Attach the Seat Cushion (B) to the backrest of Stool Back (A) using Allen Wrench (e), Bolt (b), Lock Washer (c) and Flat Washer (d), do not fully tighten at this step.

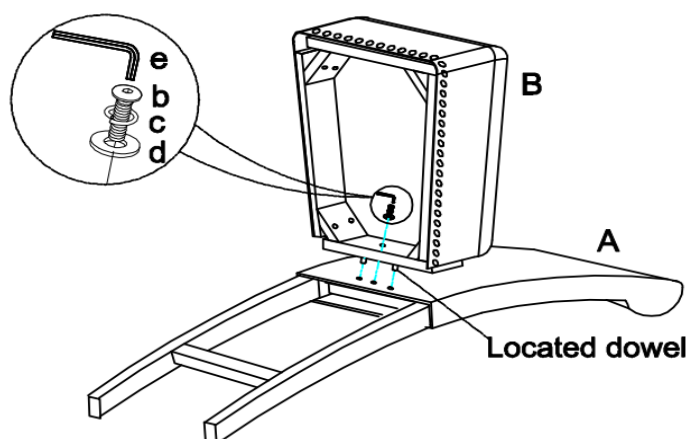

Step 2. Secure the corner blocks of Seat Cushion (B) to the legs of Stool Back (A) with Bolts (a), Lock Washers (c) and Flat Washers (d), do not fully tighten at this step.

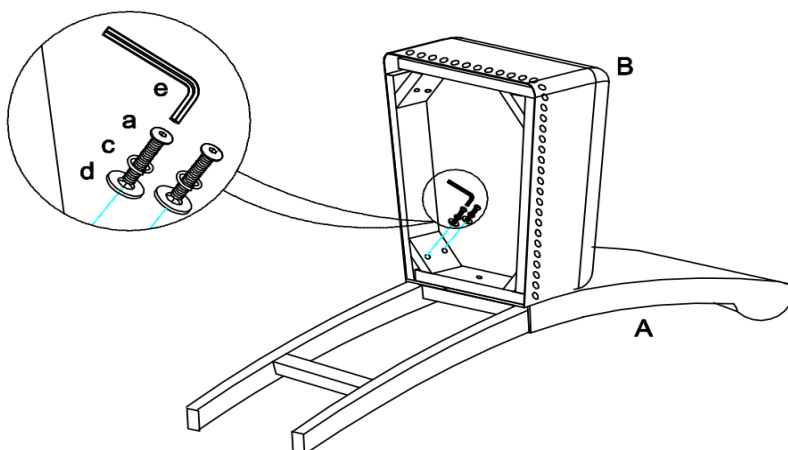


Step 3. Attach the Right Stretcher (D) to the right leg of Stool Back (A) according to the label "R" at the hole of the leg of Stool Back (A) and the front end of Stretcher (D). Loosely attach the Front Leg (F) to the bottom of Seat Cushion (B) and Stretcher (D) using Allen Wrench (e), Lock Washer (c) and Flat Washer (d).

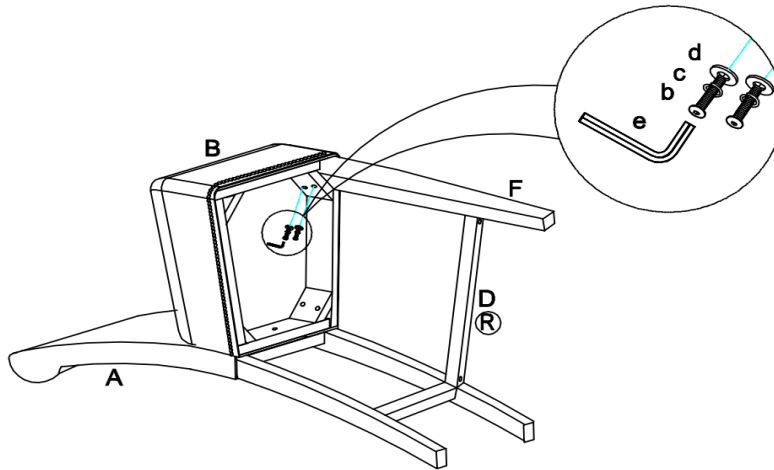

Step 4.

- 1) Attach the Left Stretcher (C) to the leg of Stool Back (A) according to the label "L" at the hole of leg of Stool Back (A) and the front end of Left Stretcher (C). Loosely attach the Front Leg (F) to the bottom of Seat Cushion (B) using Bolt (b), Lock Washer (c), Flat Washer (d) and Allen Wrench (e).
- 2) Attach the Front Stretcher between the front legs.
- 3) Fully tighten all bolts.
- 4) Secure and fully tighten all the Screws (F) at the Stretchers (C,D,E).
- 5) Assembly is completed.

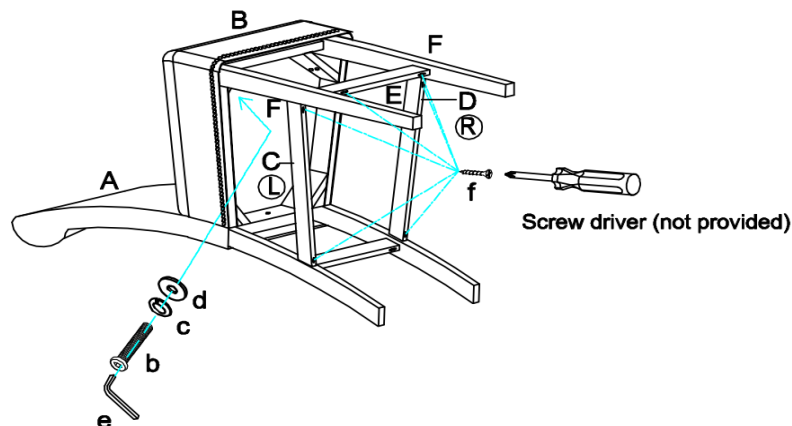

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO ENSURE THAT ALL HARDWARES ARE MAINTAINED TIGHTENED.

Thank you for your purchase