

**Important safety instructions:**


- Please read carefully all instructions before assembling the stool.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

**Pre-assembly:**

- Do not discard any content until assembly completed to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardwares from box.

## Parts List

Item	Description	QTY
A	Chair Back	1
B	Seat Cushion	1
C	Left Stretcher	1
D	Right Stretcher	1
E	Front Stretcher	1
F	Front Legs	2

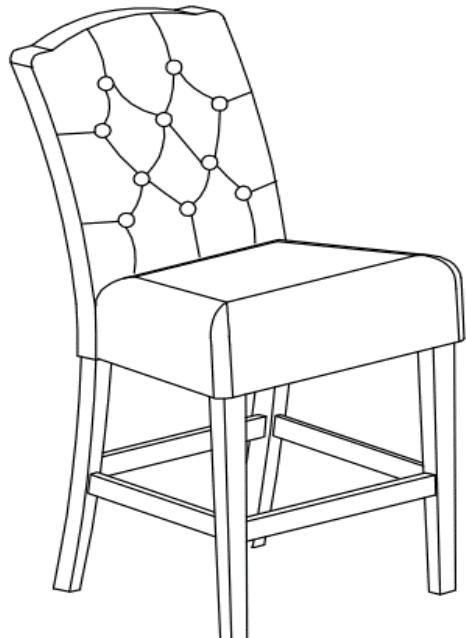

## Hardware List


Item	Description	QTY
a	Long Bolts Ø5/16"**3-1/4"	4
b	Short Bolts Ø5/16"**2"	7
c	Lock Washers 5/16"	11
d	Flat Washers 5/16"	11
e	Allen Wrench 5/16"	1
f	Screw #8*1-3/4"	6
g	Screwdriver	1

\*\*Not provided

**Assembly Procedures:****Step 1.**


- 1) Assemble the stool on a flat, soft surface such as a carpet or cloth to prevent scratching the finish.
- 2) Attach the Seat Cushion (B) to Chair Back (A) using Allen Wrench (e), Short Bolts (b), Lock Washers (c), and Flat Washers (d).

Do not fully tighten at this step.

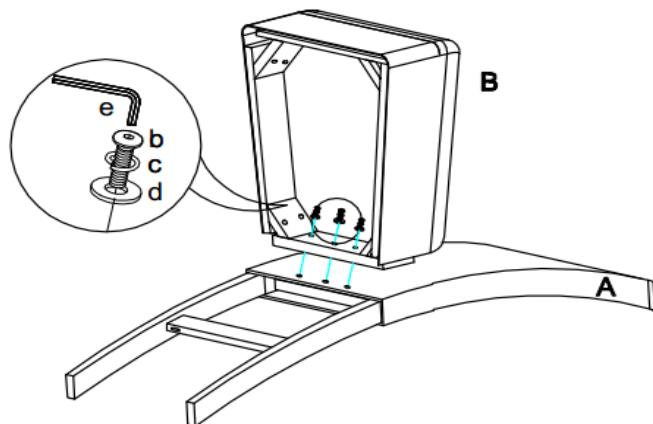


Step 2. Secure the corner blocks of Seat Cushion (B) to the legs of Chair Back (A) with Allen Wrench (e), Long Bolts (a), Lock Washers (c) and Flat Washers (d).

Do not fully tighten at this step.

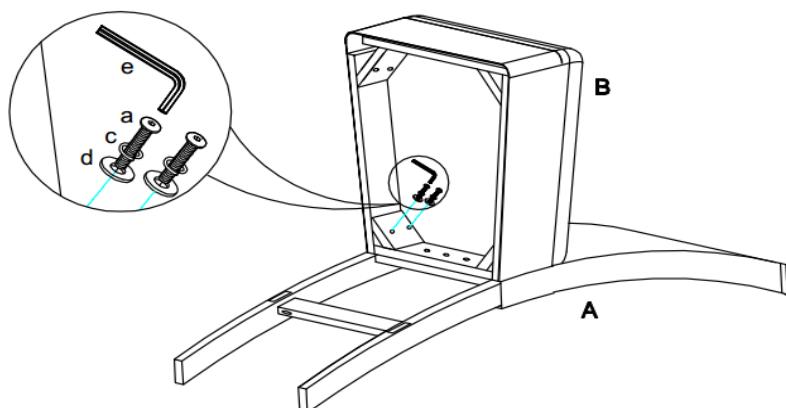


Step 3.

- 1) Attach the Right Stretcher (D) to the right leg of Chair Back (A) according to the label "R" at the pre-drilled hole of the right leg of Chair Back (A) and the front end of Stretcher (D).
- 2) Loosely attach one the Front Leg to the right-side bottom of Seat Cushion (B) and Stretcher (D) using Allen Wrench (e), Short Bolts (b), Lock Washers (c) and Flat Washers (d).  
Do not fully tighten at this step.

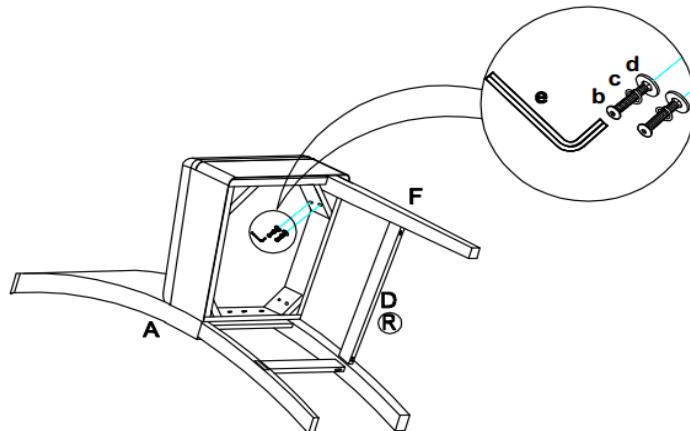

Step 4.

- 1) Attach the Left Stretcher (C) to the left leg of Chair Back (A) according to the label "L" at the pre-drilled hole of the left Leg of Chair Back (A) and the front end of Left Stretcher (C).
- 2) Loosely attach another Front Leg (F) to the left-side bottom of Seat Cushion (B) and Left Stretcher (C) using Allen Wrench (e), Short Bolts (b), Lock Washers (c) and Flat Washers (d).
- 3) Attach the Front Stretcher (E) between the Front Legs (F).
- 4) Fully tighten all Bolts (a,b)
- 5) Secure and fully tighten with screwdriver for all Screws (f) at the Stretchers (C,D,E).

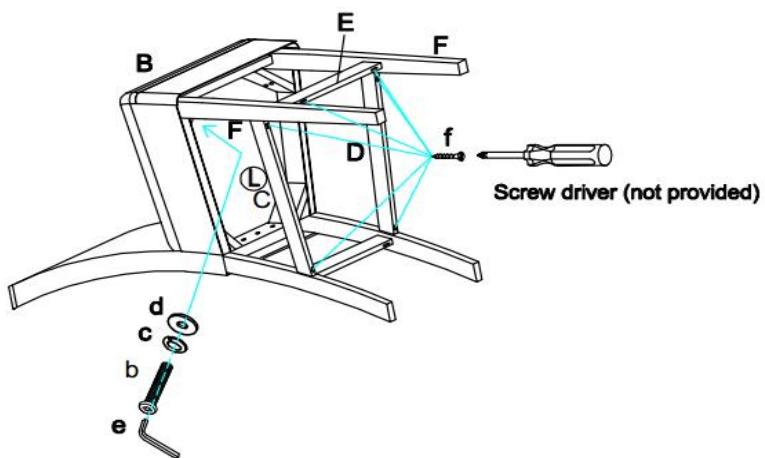

**ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO ENSURE THAT ALL HARDWARES ARE MAINTAINED TIGHTENED.**

Thank you for your purchase