


Step 1.

- 1). Assemble the chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the seat (B) to the chair back (A) using bolts (b), bolts (a), locker washers (c) and flat washers (d) as shown below.
- 2). Loosely tighten with Allen wrench (e).

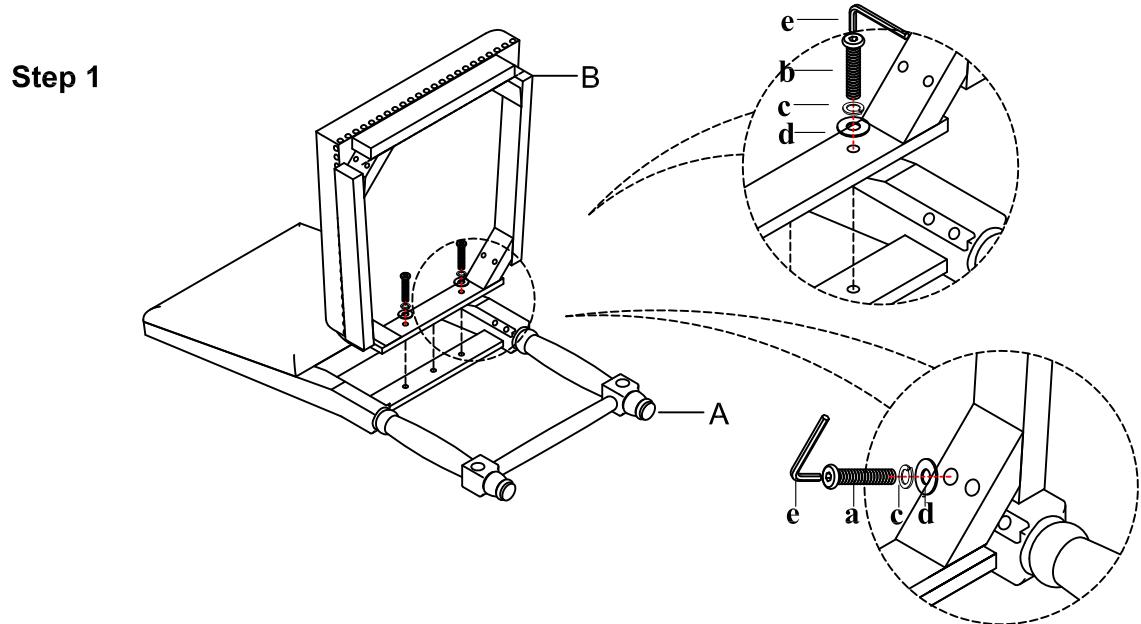

Step 2. Insert the side stretchers (E) into the hole on chair back (A) as shown.

Step 2

