


Assembly Procedures:

Step 1. Turn over the cushion (A) on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the leg (B) to the seat cushion (A) using bolt (a), lock washer (b) and flat washer(c). Loosely tighten with Allen wrench (d).

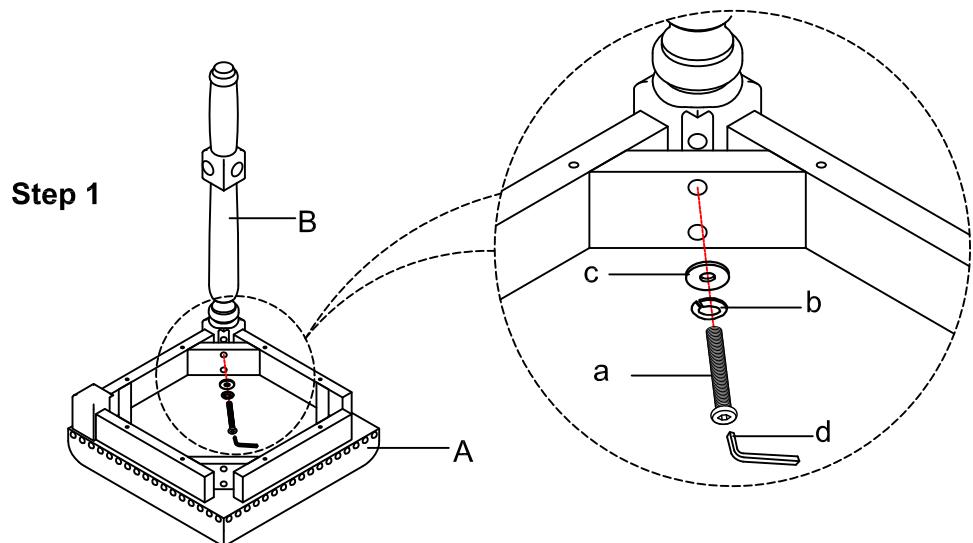

Step 2. Insert stretcher (C) between the two legs (B), then attach second leg (B) to seat cushion by using bolt (a), lock washer (b) and flat washer (c), loosely tighten with allen wrench (d).

Step 2

