



Step 3. Insert second stretcher (C) between the two legs (B), then attach third leg (B) to seat cushion by using bolt (a), lock washer (b) and flat washer (c), loosely tighten with Allen wrench(d).

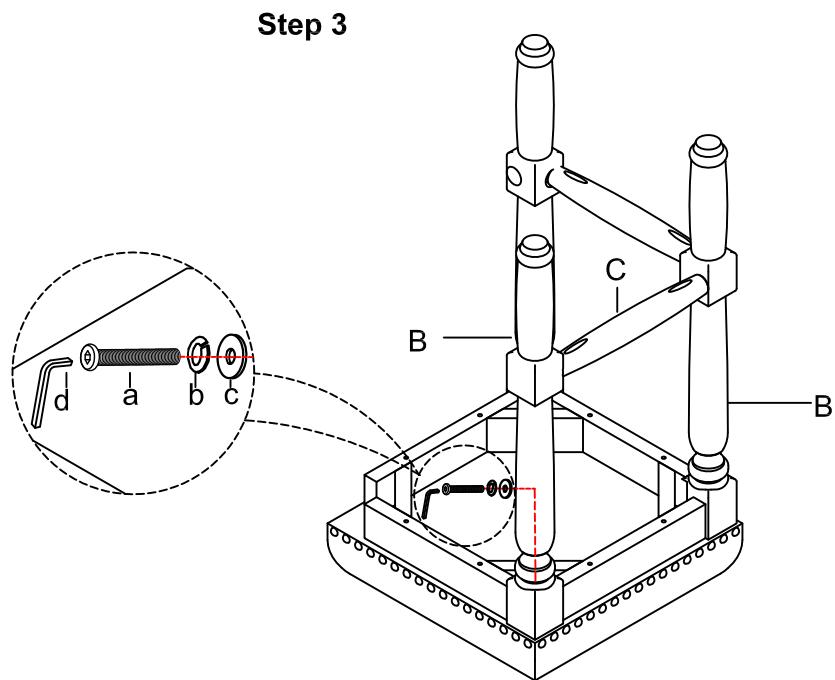

Step 4.

- 1) Insert two stretchers (C) to the legs (B), then attach last leg (B) to seat cushion by using bolt (a), lock washer (b) and flat washer (c), loosely tighten with Allen wrench (d).
- 2) Securely tighten all bolts with Allen wrench (d).
- 3) Tighten screws (e) through the stretchers (C) to the legs (B) with screw driver (not provided).

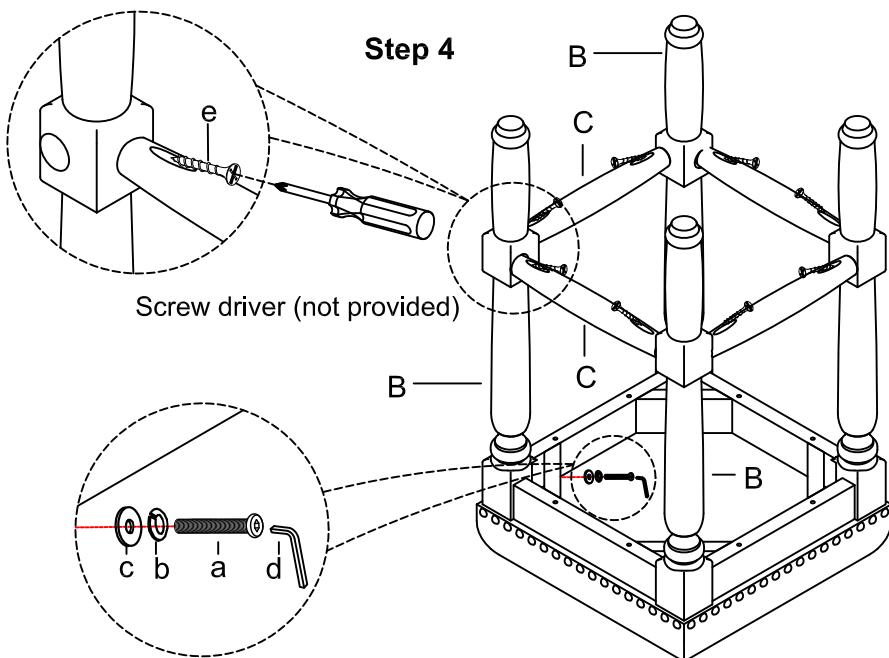

Thank you for your purchase