

# ASSEMBLY INSTRUCTIONS

## Description: Arm Chair

### Important safety instructions:

- Please carefully read all instructions before assembling the chair.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

### Pre-assembly:


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

### Parts List

Item	Description	QTY
A	Left Arm	1
B	Right Arm	1
C	Back Frame	1
D	Front Top Rail	1
E	Front Stretcher	1
F	Seat Cushion	1
G	Removable Back Cushion	1


### Hardware List

Item	Description	QTY
a	Bolts Ø1/4"**1-1/2"	8
b	Lock Washers 1/4"	8
c	Flat Washers 1/4"(12mm)	8
d	Allen Wrench 1/4"	1
e	Wooden Plugs	8
f	Wood Screws	4

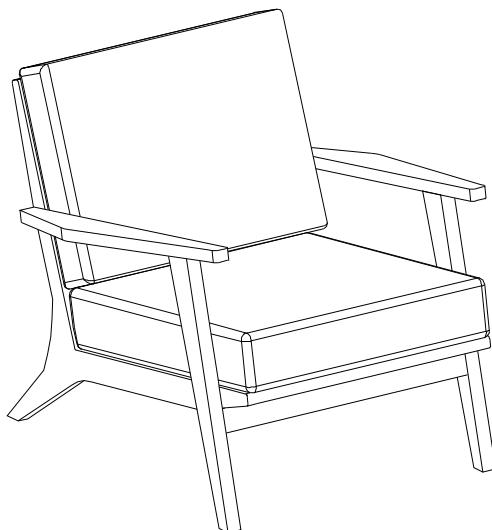


### Assembly Procedures:


Step 1. Assembly the chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the back frame (C), front top rail (D) and front stretcher (E) to the right arm (B) using bolts (a), lock washers (b) and flat washers (c). Loosely tighten all bolts with Allen wrench (d).

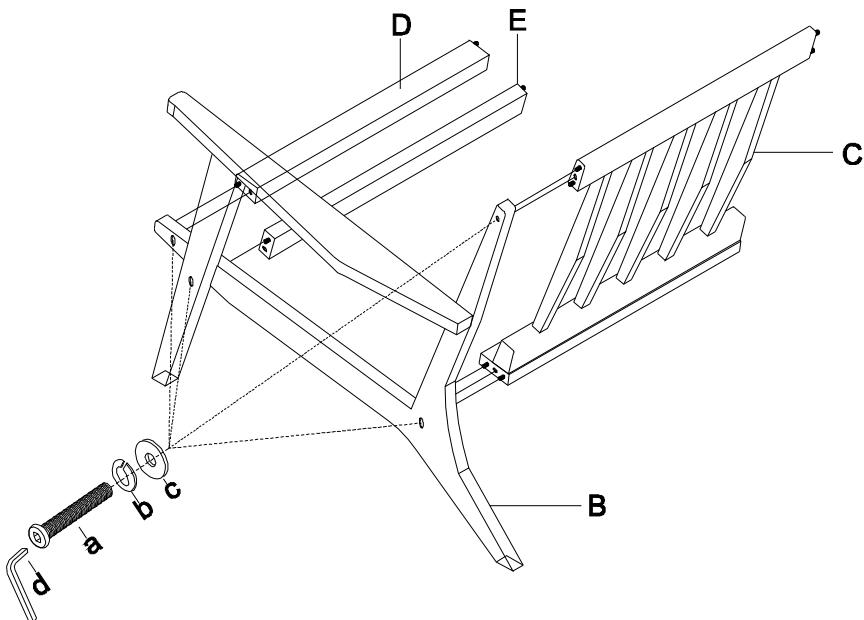

Step 2. Attach the left arm (A) to the back frame (C), front top rail (D) and front stretcher (E) using bolts (a), lock washers (b) and flat washers (c), loosely tighten all bolts with Allen wrench (d).

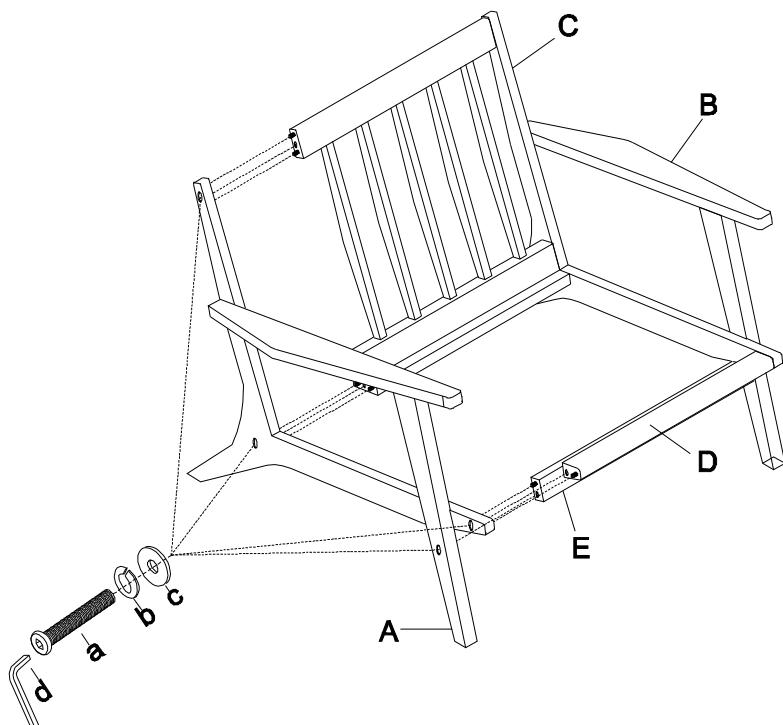


**Step 3. Tighten all screws (f) through the back frame (C) and front rail (D) to the seat cushion (F) with screw driver (not provided).**

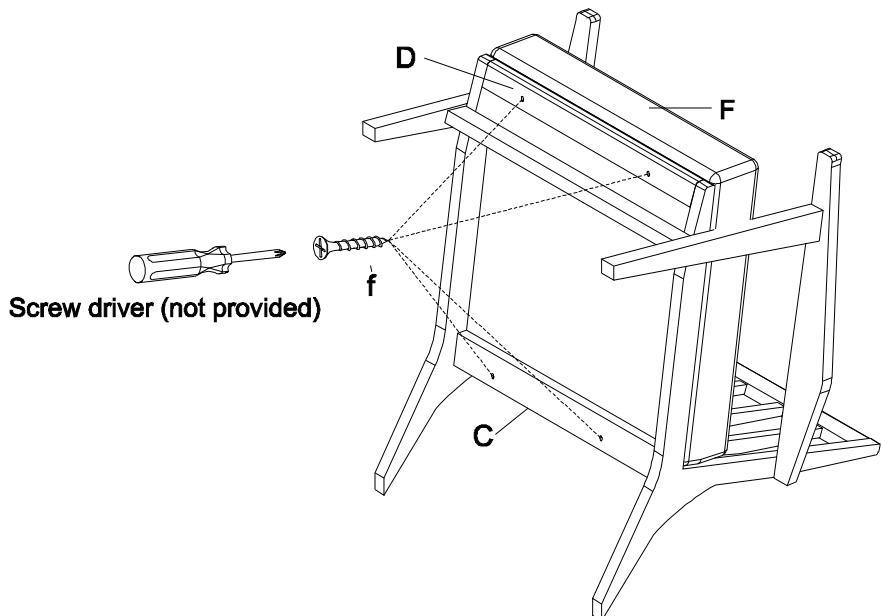

**Step 4.**

- 1) Turn the chair to an upright position and make sure the chair is level on the floor, and then tighten all bolts completely with Allen wrench (d) using the wrench.
- 2) Attach wooden plugs (e) to each exposed bolt hole, tighten with rubber hammer to knock the wooden plug till its tighten. Note: use a soft cloth between the wooden plug and hammer to prevent damage to wooden plug finish.
- 3) Assembly is complete. Failure to follow these instructions may cause the bolts to misalign during assembly.
- 4) Put the removable back cushion (G) on the assembled chair.

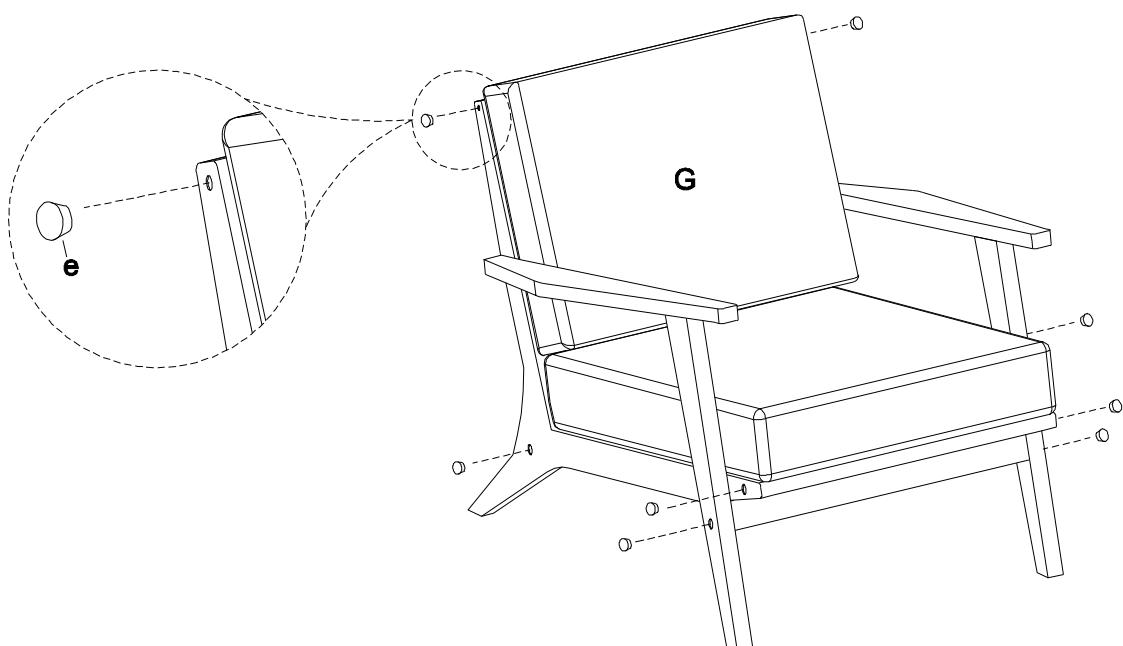

**ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.**