

ASSEMBLY INSTRUCTIONS

Description: Loveseat


Important safety instructions:

- Please carefully read all instructions before assembling the Loveseat.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description	QTY
A	Left Arm 	1
B	Right Arm 	1
C	Seat Cushion 	1
D	Back Cushion 	1
E	Seat Frame 	1
F	Back Top Rail 	1
G	Back Bottom Rail 	1
H	Front Rail 	1

Hardware List

Item	Description	QTY
a	Bolts Ø5/16"*2" 	4
b	Bolts Ø1/4"*2" 	2
c	Bolts Ø1/4"*2-1/2" 	4
d	Lock Washers Ø5/16" 	6
e	Flat Washers Ø5/16"*22mm 	4
f	Lock Washers Ø1/4" 	6
g	Flat Washers Ø1/4"*16mm 	2
h	Flat Washers Ø1/4"*22mm 	4
i	Big Allen Wrench 5/16" 	1
j	Small Allen Wrench 1/4" 	1
k	Threaded Rod Ø5/16" 	2
l	Nuts Ø5/16" 	2
m	Half-round Washer 5/16" 	2
n	Open Wrench 5/16" 	1
o	Wooden Plugs 	2
p	Wood Screw 	7

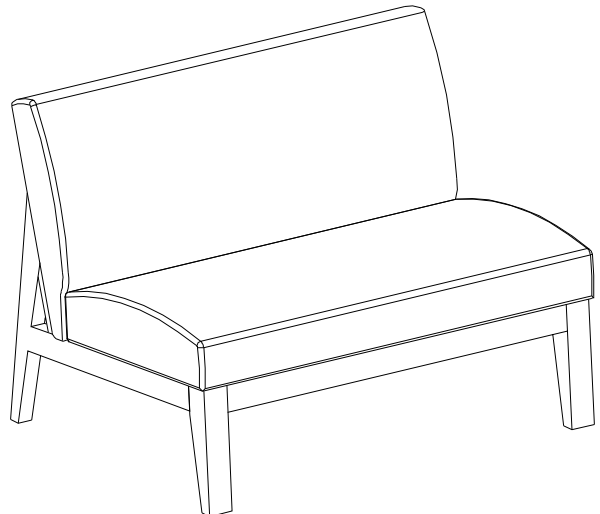


Assembly Procedures:

Step 1. Assembly the loveseat on a flat, soft surface such as a carpet or cloth to prevent scratching the finish.

1) Screw the Threaded Rod (k) into the left arm (A).


2) Attach the back top rail (C), back bottom rail (G), seat frame (E) and front rail (H) with label "B" , seat frame (E) and front rail (H) with label "F" to the left arm (A) using bolts (a), lock washers (d), flat washers (e), nut (l) and half round washer (m) as show below. Loosely tighten all bolts with big Allen wrench (i) and open wrench (n).

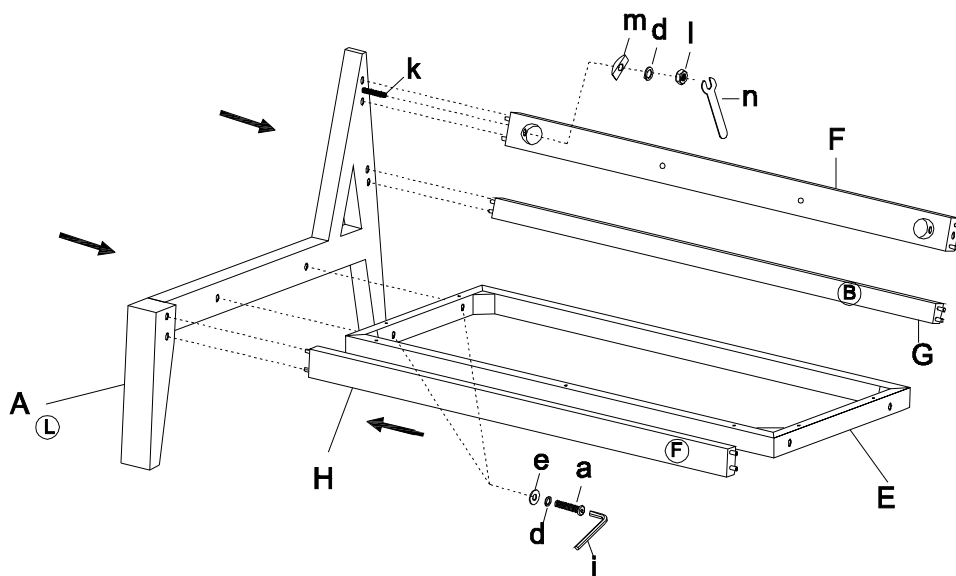


Step 2.

1) Screw the Threaded Rod (k) into the right arm (B).

2) Attach the right arm (B) to the back top rail (C), back bottom rail (G), seat frame (E) and front rail (H) using bolts (a), lock washers (d), flat washers (e), nut (l) and half round washer (m) as shown below. Loosely tighten all bolts with big Allen wrench (i) and open wrench (n).

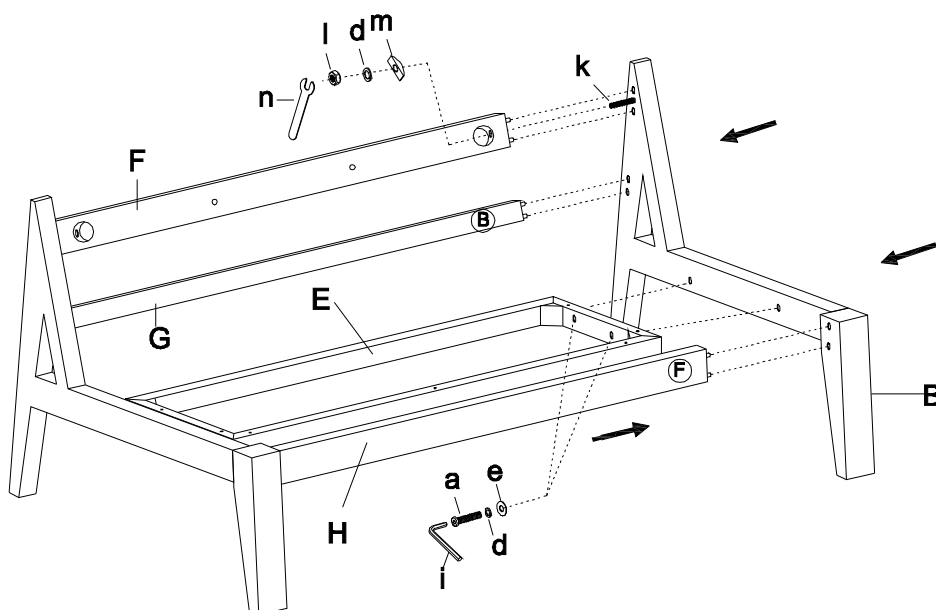


Step 3. Open the bottom covering of seat cushion (C), and then attach the seat cushion (C) to the back cushion (D) using bolts (c), lock washers (f) and flat washers (h) as shown below. Securely tighten all bolts with small Allen wrench (j).

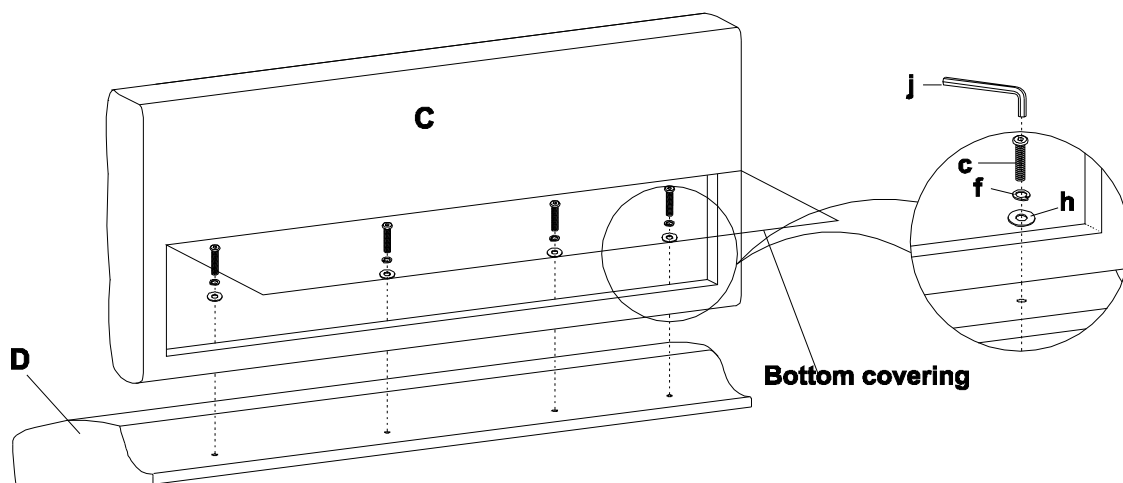


Step 4.

- 1) Securely tighten all bolts with Allen wrench (i, j) and open wrench (n).
- 2) Hold the assembled seat cushion (C) and back cushion (D) by two or more adults is recommended.
- 3) Attached the assembled back top rail (F) to the back of back cushion (D) using bolts (b), lock washers (f) and flat washers (g).
- 4) Securely tighten all the bolts with small Allen wrench (j).

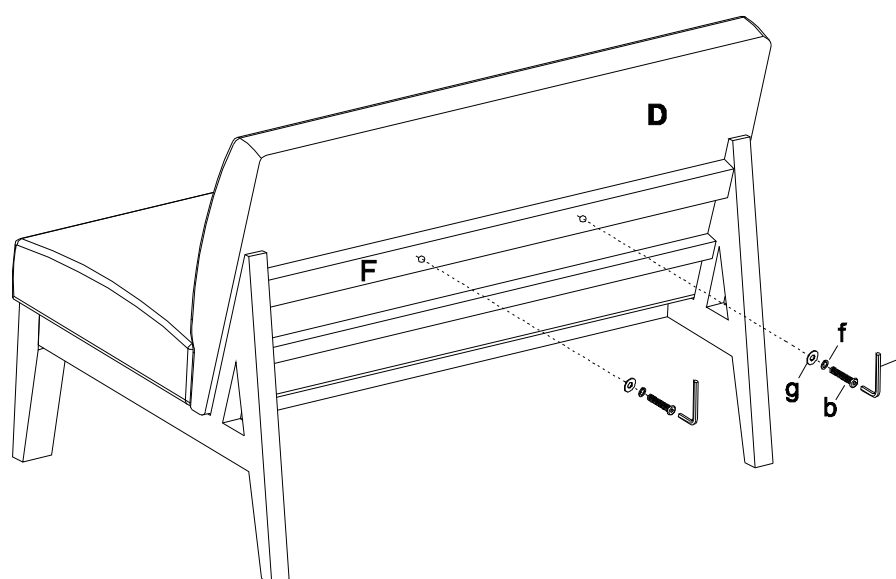


Step 5. Attach the seat frame (E) to the bottom of seat cushion (C) using wood screw (p). Tighten all screw with screwdriver (not provided)

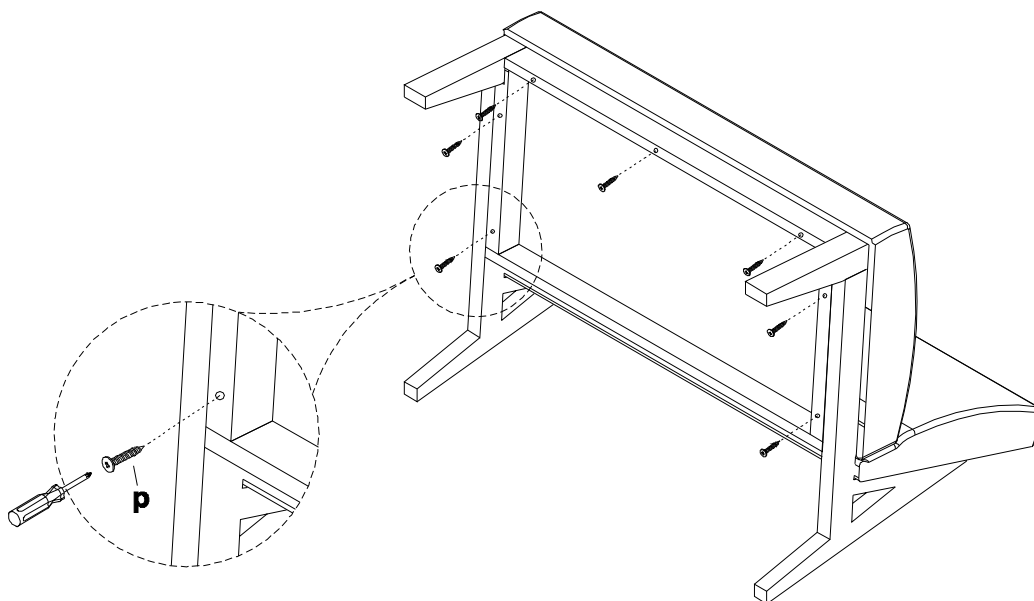

Step 6.

- 1) Turn the assembled chair to an upright position. Securely tighten all bolts with big/small Allen wrenches (i, j) and open wrench (n), but do not over tighten the bolts.
- 2) Attach wooden plugs (o) to each each exposed bolt hole, tighten with rubber hammer to knock the wooden plug till its tighten. Note: use a soft cloth between the wooden plug and hammer to prevent damage to wooden plug finish.
- 3) Assembly is complete. Failure to follow these instructions may cause the bolts to misalign during assembly.

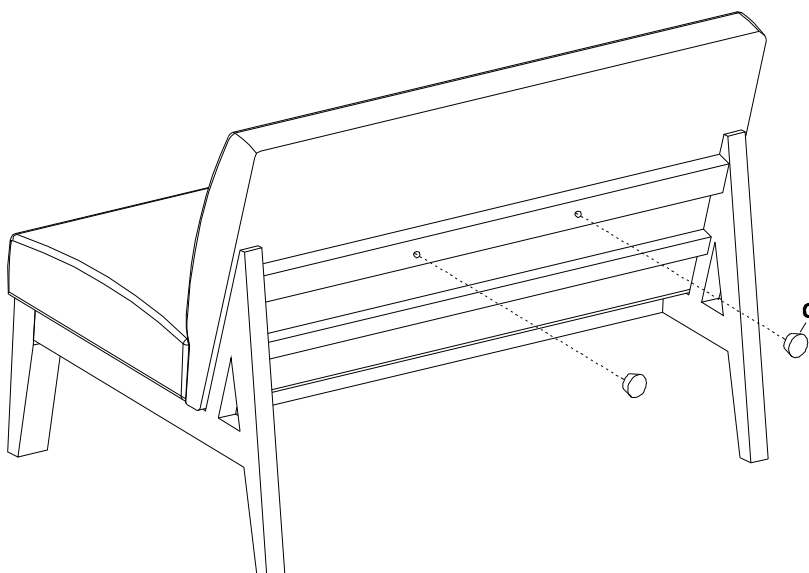

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase