










Kelsey Chaise Lounge

Assembly Instruction:

PARTS LIST

No.	DESCRIPTION	IMAGE	QTY
P1	Front Leg		1
P2	Back Leg		1
P3	chaise longue		1
P4	Cushion		1

HARDWARE LIST


No.	DESCRIPTION	IMAGE	QTY
H2	Bolts φ5/16*1"		4
H1	Metal Washers φ5/16"		4
H5	Plastic Washers φ5/16"		4
H3	Plastic bolt cap φ5/16"		4
H4	Allen Wrench φ5/16"		1

NOTE:PO# is located underneath/inside of each item.
Please be prepare to provide this # should any claim be necessary.



CAUTION: Item is heavy assembly should be performed by two people.

Estimate assembly time: 5 minutes

Step 1. Turn the chaise lounge(P3) over and attach the legs (P1,P2) to the bottom frame by using metal washers (H1),plastic washer(H5) and bolts (H2) , securely tighten all bolts with Allen Wrench (H4). then cover the bolts with cap (H3) .

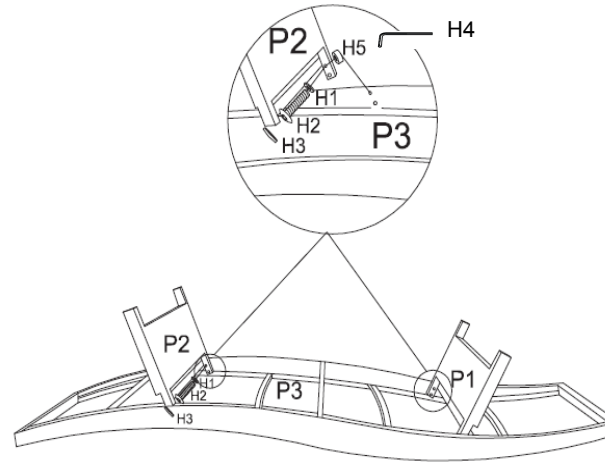

Step 2.Turn the chaise lounge over and place it on a level surface ,then put the cushion(P4) on .

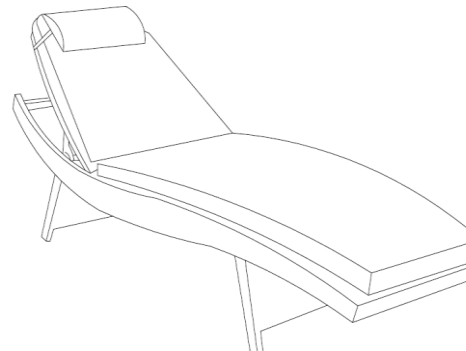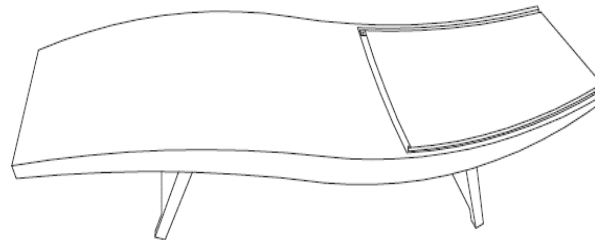

ASSEMBLY COMPLETED