

Important safety instructions:


- Please carefully read all instructions before assembling the chair.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description	QTY
P1	Seat Cushion	1
P2	Chair Back	1
P3	Left Leg	1
P4	Right Leg	1

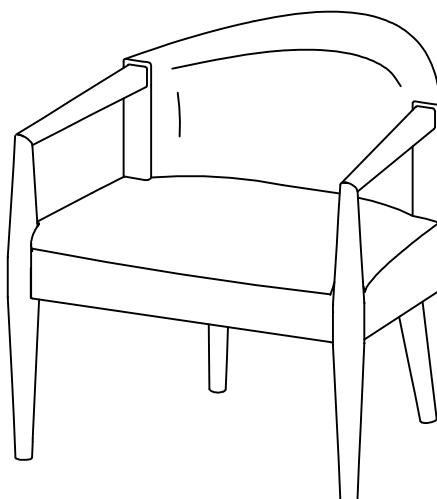**Hardware List**

Item	Description	QTY
H1	Bolts Ø5/16"x2-1/2" L	9
H2	Lock Washers Ø5/16"	11
H3	Flat Washers Ø5/16"	9
H4	Allen Wrench Ø5/16"	1
H5	Threaded Rod Ø5/16"**2-1/2"	2
H6	Nuts Ø5/16"	2
H7	Half-round Washer 5/16"	2
H8	Open Wrench 5/16"	1

Assembly Procedures:

Step 1. Assembly the chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach seat cushion (P1) to chair back (P2) using bolts (H1), lock washers (H2), flat washers (H3) as shown below.

(H1)x5 Bolts Ø5/16"x2-1/2" L




(H2)x5 lock Washers Ø5/16"



(H3)x5 Flat Washers Ø5/16"




(H4)x1 Allen Wrench Ø5/16"

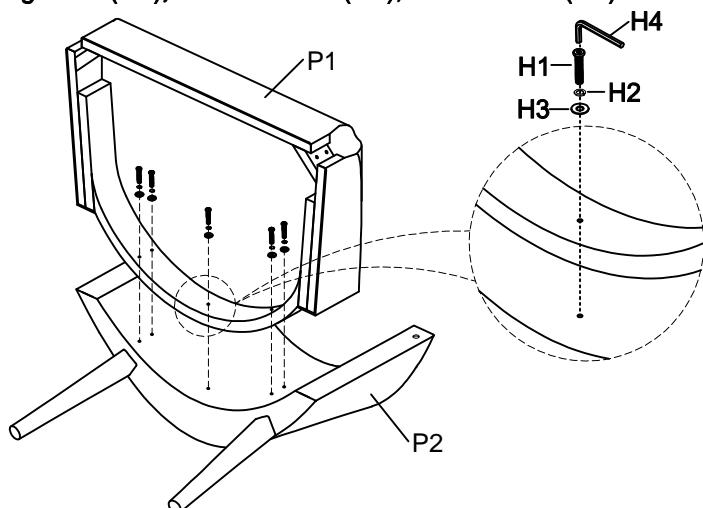

Step 2.

- 1) Screw the Threaded Rod (H5) into the chair back (P2).
- 2) Loosely attach the left/right leg (P3,P4) to the chair back (P2) using nuts (H6), lock washers (H2) and half-round washers (H7) as show below.


(H2)x2 lock washers Ø5/16"
(H5)x2 Threaded Rod Ø5/16" *2-1/2"
(H6)x2 Nuts Ø5/16"
(H7)x2 Half-round Washer 5/16"
(H8)x1 Open Wrench 5/16"

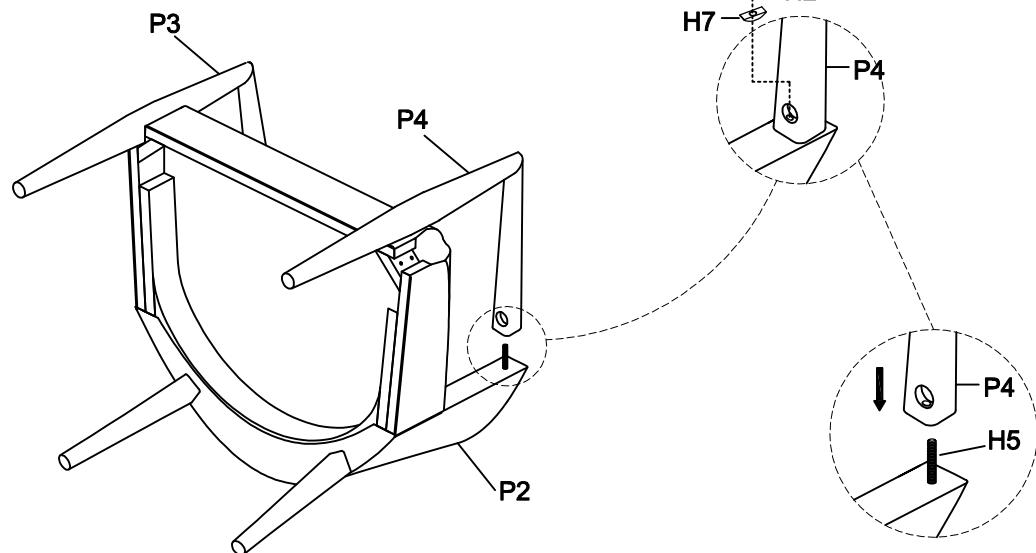

Step 3.

- 1) Loosely attach left/right leg (P3, P4) to the corner of seat cushion (P1) using bolts (H1), lock washers (H2) and flat washers (H3) as shown below.
- 2) Turn the assembled chair to an upright position. Make sure the chair is level and securely tighten all bolts with Allen wrench (H4) and open wrench (H9). Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

(H1)x4 Bolts Ø5/16" x2-1/2" L
(H2)x4 lock washers Ø5/16"
(H3)x4 Flat Washers Ø5/16"
(H4)x1 Allen Wrench Ø5/16"

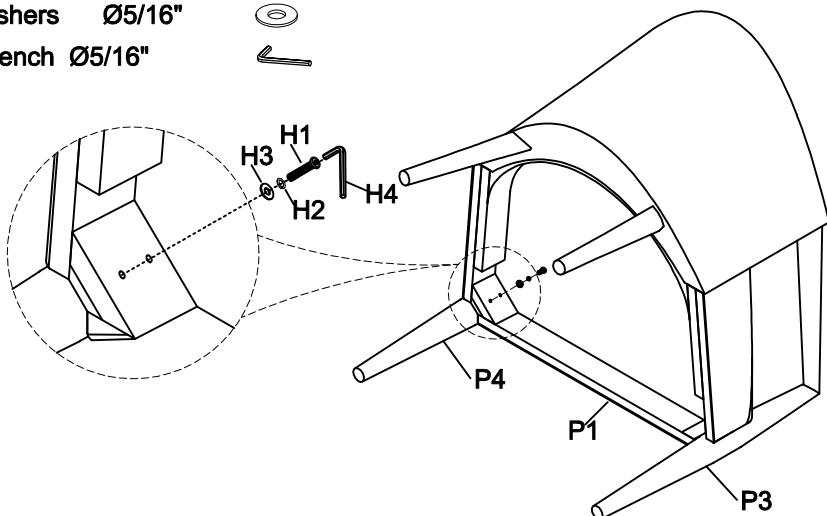

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase