






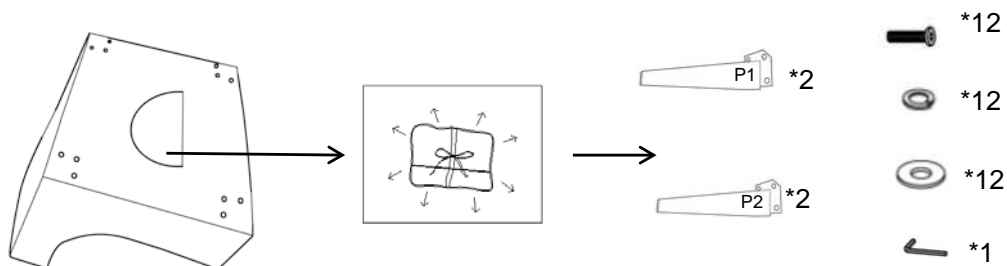


Assembly Instruction--Accent Chair


PARTS #	PARTS NAME	DRAWING	QTY
P1	Left Front Leg /Right Back leg		2
P2	Right Front Leg /Left Back leg		2
P3	Chair		1

Hardware#	PARTS NAME	DRAWING	QTY
H1	Bolts $\phi 5/16 \times 2-3/16$ "		12
H2	Lock Washers $\phi 5/16$ "		12
H3	Flat Washers $\phi 5/16$ "		12
H4	Allen Wrench $\phi 1/4$ "		1

1. Turn the chair over and take out the legs from the zipper pocket on the bottom.



2. Attach the legs(P1,P2) to the seat frame by using Flat Washers (H3), Lock Washers(H2) and Bolts (H1). Securely tighten all bolts with Allen Wrench (H4).

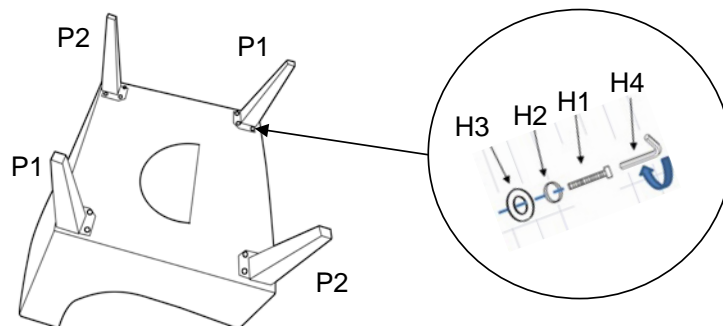

3. Level the chair and place the chair upright on a level surface.

