










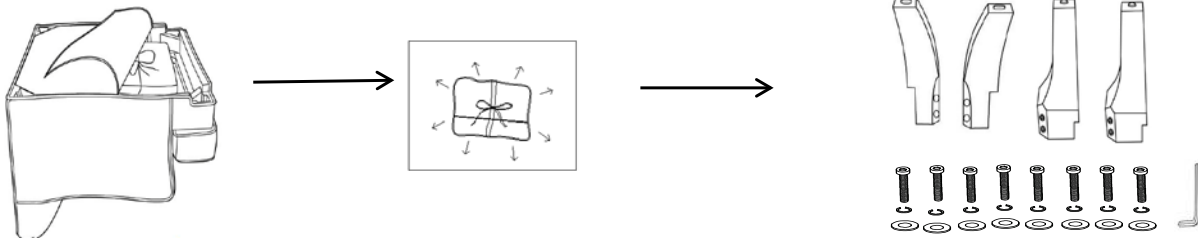
# MADISONPARK

## Assembly Instruction---Accent Chair


PARTS #	PARTS NAME	DRAWING	QTY
P1	FRONT LEGS		2
P2	RIGHT BACK LEGS		1
P3	LEFT BACK LEGS		1
P4	SEAT CUSHION		1
P5	Chair		1

Hardware#	PARTS NAME	DRAWING	QTY
H1	Bolts φ5/16*2-3/16"		8
H2	Lock Washers φ5/16"		8
H3	Flat Washers φ5/16"		8
H4	Allen Wrench φ5/16"		1

1. Turn the chair upside down and lay on protective carpet ,Open the black fabric of the bottom,and take out the legs underneath the seat.



2. Attached the Legs to the seat frame by using Flat Washers (H3), Lock Washers(H2) and Bolts (H1). Securely tighten all bolts with Allen Wrench (H4).

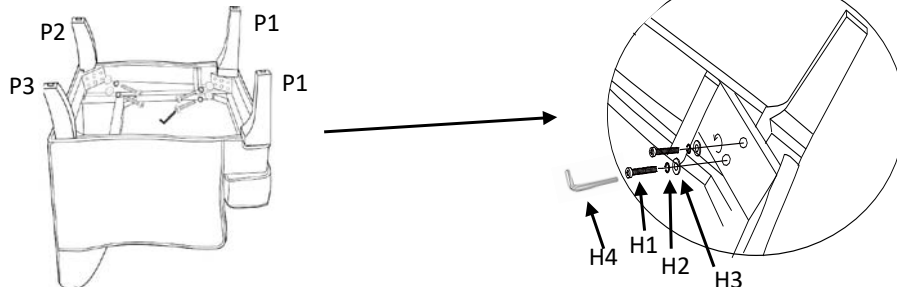

3. Close the black fabric of the bottom,Turn the chair over.Put the seat cushion(P5) on the chair.

