

**Important safety instructions:**

- Please carefully read all instructions before assembling.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

**Pre-assembly:**


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

**Parts List**

Item	Description	QTY
P1	Chair Top	1
P2	Left Side Frame	1
P3	Right Side Frame	1
P4	Seat Frame	1
P5	Back Top Rail	1
P6	Front Stretcher	1
P7	Back Stretcher	1

**Hardware List**

Item	Description	QTY
H1	Long Bolts Ø5/16" *3" L	4
H2	Short Bolts Ø5/16" *2" L	4
H3	Lock Washers 5/16"	8
H4	Flat Washers 5/16"	8
H5	Allen Wrench 5/16"	1
H6	Screws #8*1-1/2"	6
H7	Screws #8*5/8"	4

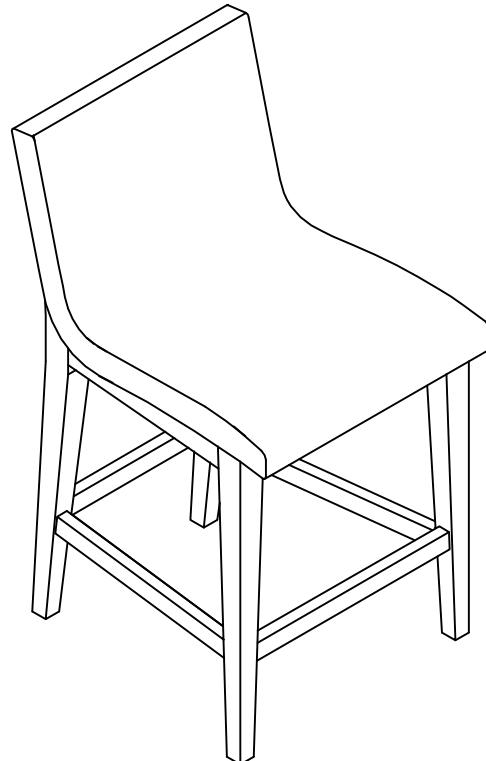

### Assembly Procedures:

Step 1. Assemble the chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish.

- 1) Attach seat frame (P4) to right side frame (P3) using bolts (H1&H2), lock washers (H3) and flat washers (H4) as shown below.
- 2) Attach back top rail (P5), front stretcher (P6) and back stretcher (P7) to the right side frame (P3) as shown below, do not tighten at this step.


(H1)x2 Long Bolts

(H2)x2 Short Bolts

(H3)x4 Lock Washers

(H4)x4 Flat Washers

(H5)x1 Allen Wrench

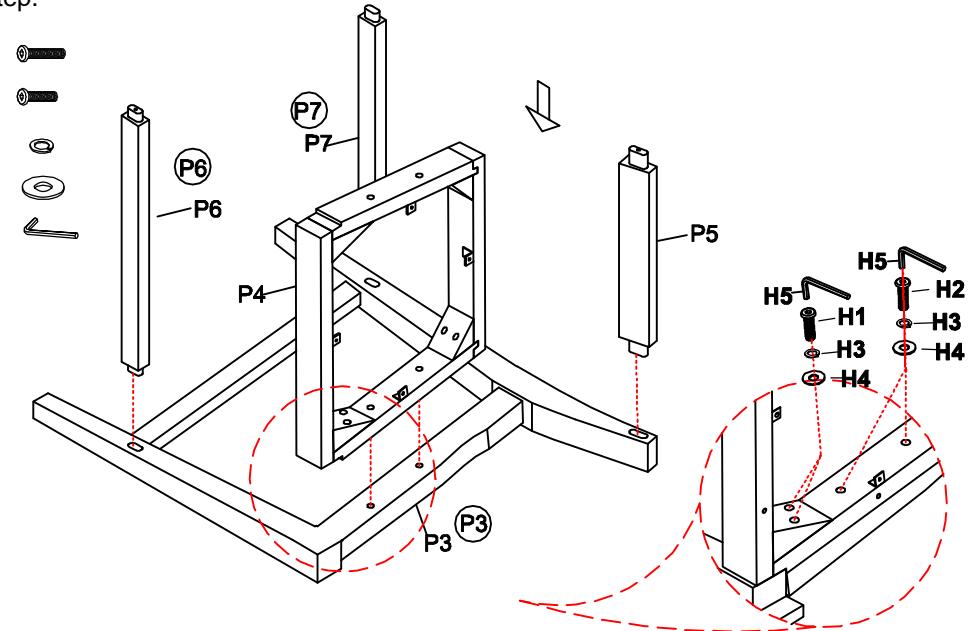

### Step 2.

- 1) Loosely attach left right side frame (P2) to the back top rail (P5), front stretcher (P6), back stretcher (P7) and seat frame (P4) using bolts (H1&H2), lock washers (H3) and flat washers (H4) as shown below.
- 2) Tighten screws (H6) through the back top rail (P5) to each side frame with screw driver (not provided).


(H1)x2 Long Bolts

(H2)x2 Short Bolts

(H3)x4 Lock Washers


(H4)x4 Flat Washers

(H6)x2 Screws

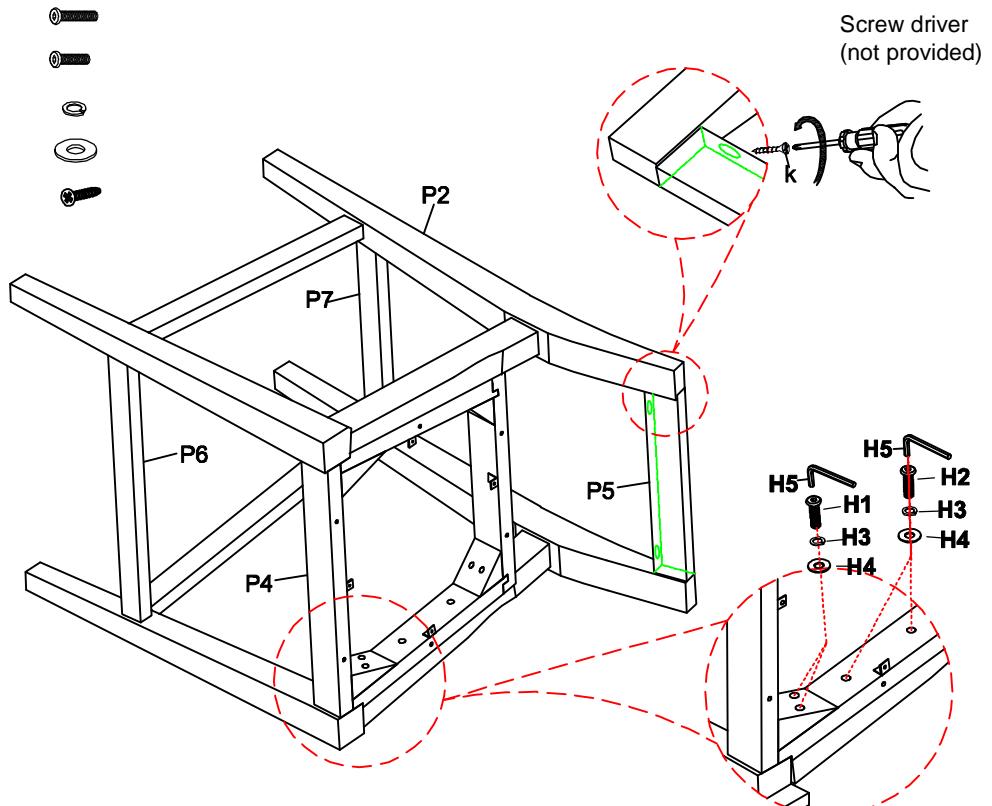

Step 3. Tighten screws (H6) through the stretchers (P6, P7) to each legs with screw driver (not provided).


(H6)x4 Screws

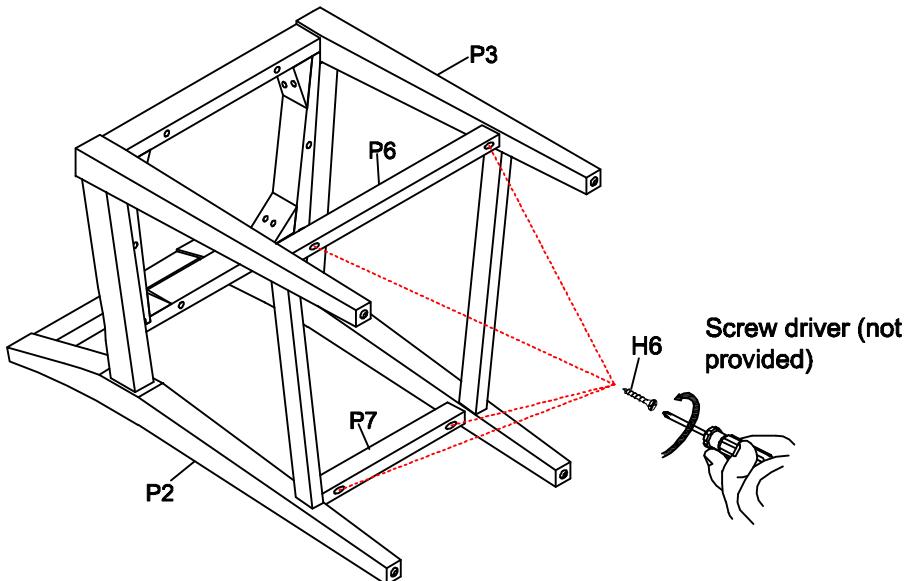

**Step 4.**

- 1) Attach chair top (P1) to the assembled seat frame (P4) as using screws (H7). Securely tighten with screw driver (not provided)
- 2) Make sure the stool is level and securely tighten all bolts by Allen wrench (H5).
- 3) Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

(H7)x4 Screws

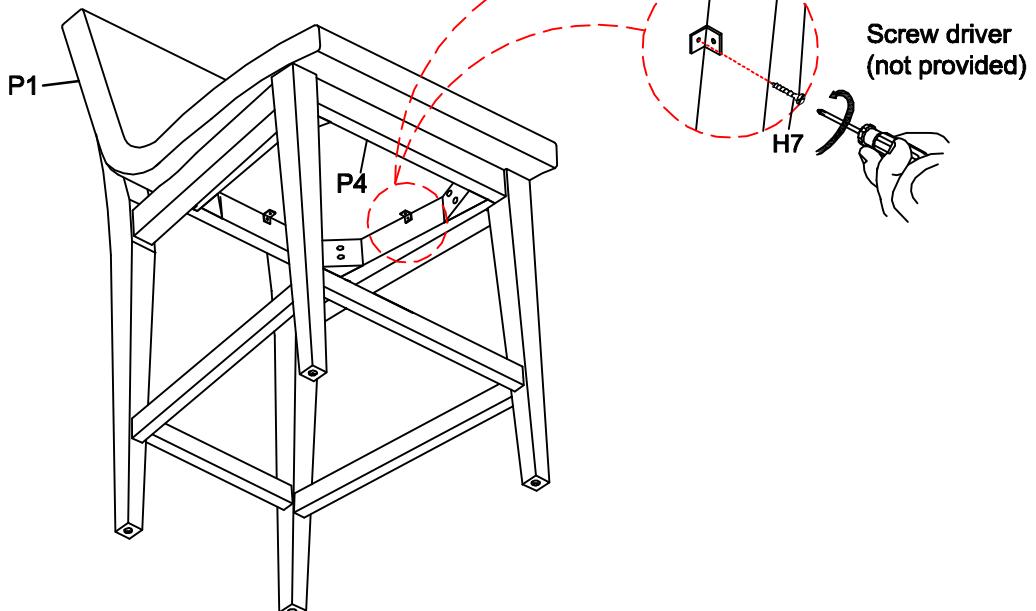

**ADDITIONAL NOTE ABOUT SAFETY:** BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

**Thank you for your purchase**