

**Important safety instructions:**

- Please carefully read all instructions before assembling.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

**Pre-assembly:**


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

**Parts List**

Item	Description	QTY
P1	Chair Top	1
P2	Back Left Leg	1
P3	Back Right Leg	1
P4	Front Right leg	1
P5	Front Left leg	1
P6	Back stretcher	1
P7	Front Stretcher	1
P8	Right Side Stretcher	1
P9	Left Side Stretcher	1

**Hardware List**


Item	Description	QTY
H1	Bolts Ø5/16"**2-1/2"L	8
H2	Lock Washers 5/16"	8
H3	Flat Washers 5/16"	8
H4	Allen Wrench 5/16"	1
H5	Screws #8*1-1/2"	8

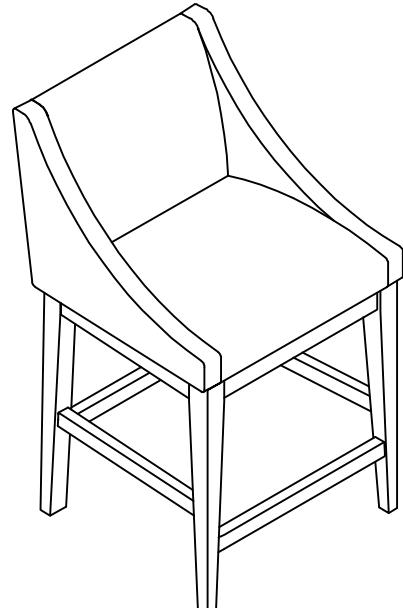

### Assembly Procedures:


Step 1. Assemble the stool on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. **Loosely** attach the back left leg (P2) to seat cushion (P1) following the label "P2" on the back left leg (P2) and seat cushion (P1) accordingly and using bolts (H1), lock washers (H2) and flat washers (H3) as shown below.

(H1)x2	Bolts	
(H2)x2	Lock Washers	
(H3)x2	Flat Washers	
(H4)x1	Allen Wrench	

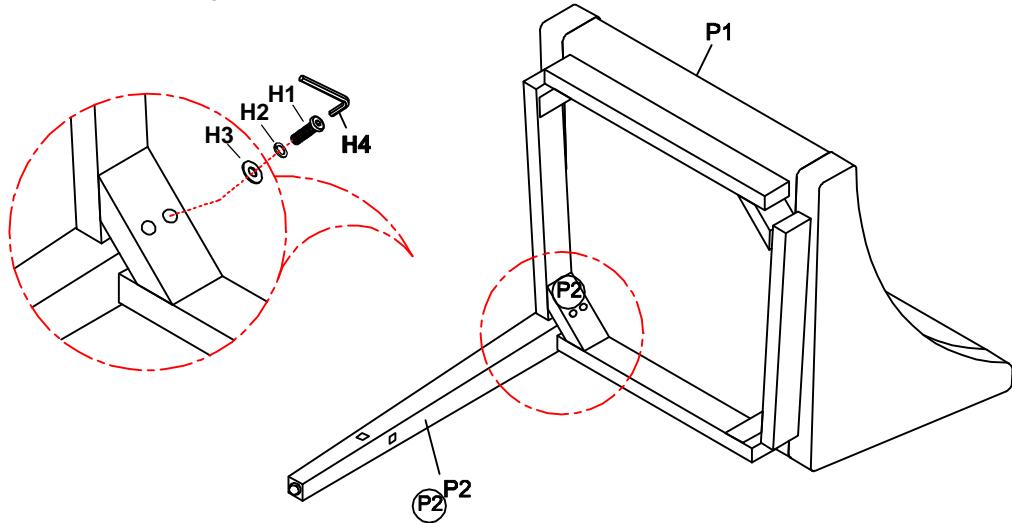


Step 2. Insert the back stretcher (P6) to back left leg (P2) following the label "P6" on back stretcher (P6) accordingly. **Loosely** attach the back right leg (P3) to the bottom of seat cushion (P1) and the back stretcher (P6) following the label "P3" on back right leg (P3) and the bottom of seat cushion (P1) accordingly and using bolts (H1), lock washers (H2) and flat washers (H3) as shown below.

(H1)x2	Bolts	
(H2)x2	Lock Washers	
(H3)x2	Flat Washers	

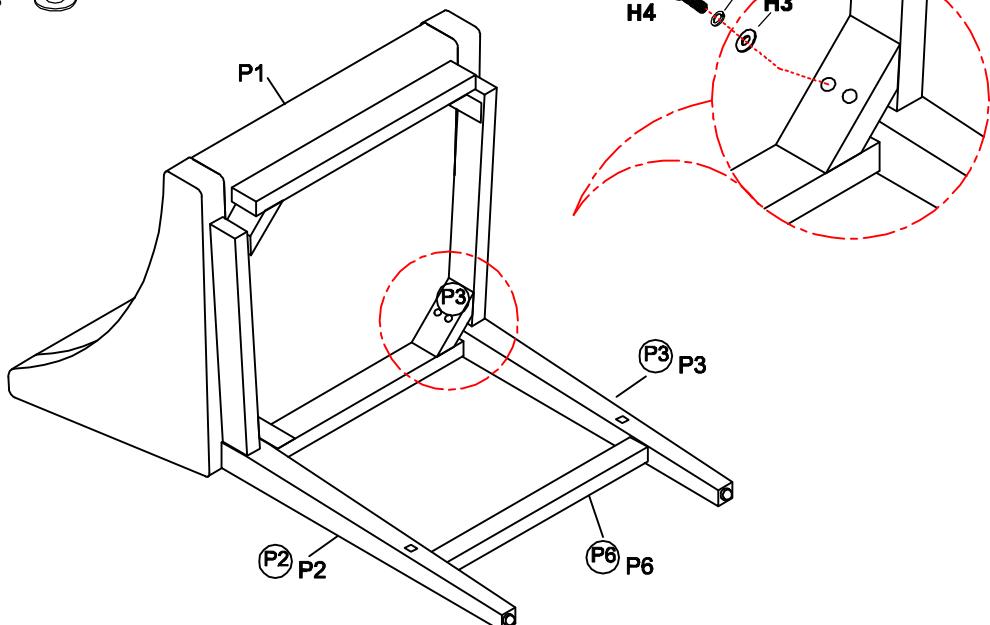

Step 3. Insert the right side stretcher (P8) between the back right leg (P3) and front right leg (P4) following the label "P8" "P4" and "P3" on each part accordingly. **Loosely** attach front right leg (P4) to the bottom of seat cushion (P1) using bolts (H1), lock washers (H2) and flat washers (H3) as shown below.


(H1)x2 Bolts   
 (H2)x2 Lock Washers   
 (H3)x2 Flat Washers 

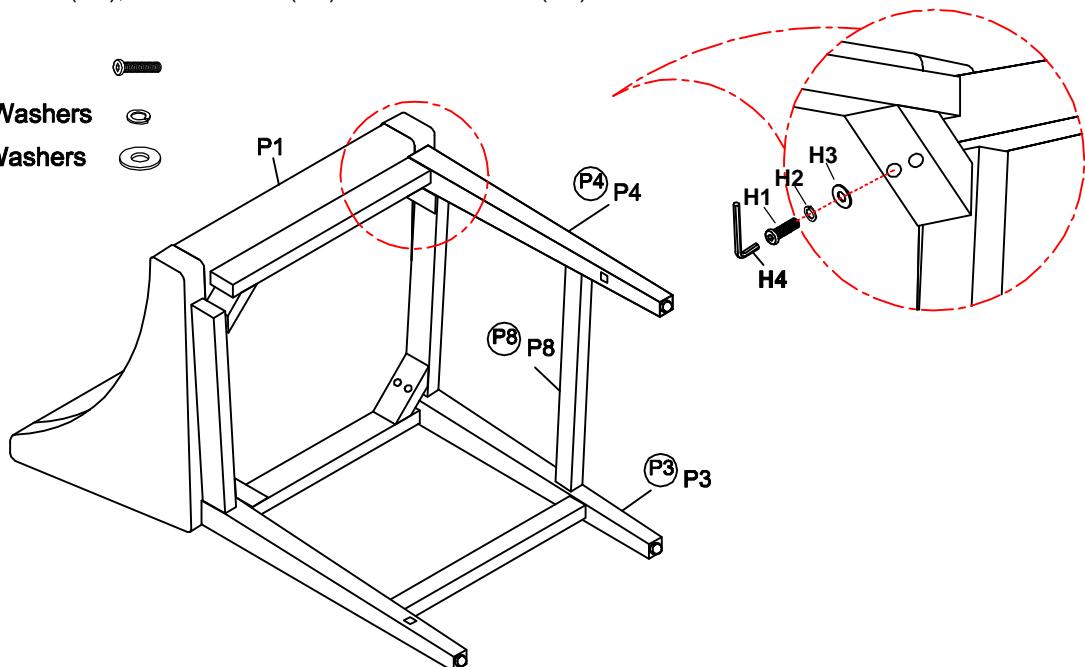

**Step 4.**

- 1) Insert front stretcher (P7) between right front leg (P4) and left front leg (P5), and insert right stretcher (P9) between front right leg (P4) and the back left leg (P9) following "P7", "P9" on each part accordingly, then **loosely** attach last leg (P5) to bottom of seat cushion (P1) using short bolt (H1), lock washer (H2) and flat washer (H3) as shown below.
- 2) Tighten screws (H5) through the stretchers (P6, P7, P8, P9) to each leg with screw driver (not provided).
- 3) Make sure the stool is level and securely tighten all bolts by Allen wrench (H4).
- 4) Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

(H1)x2 Bolts   
 (H2)x2 Lock Washers   
 (H3)x2 Flat Washers   
 (H5)x8 Screws 

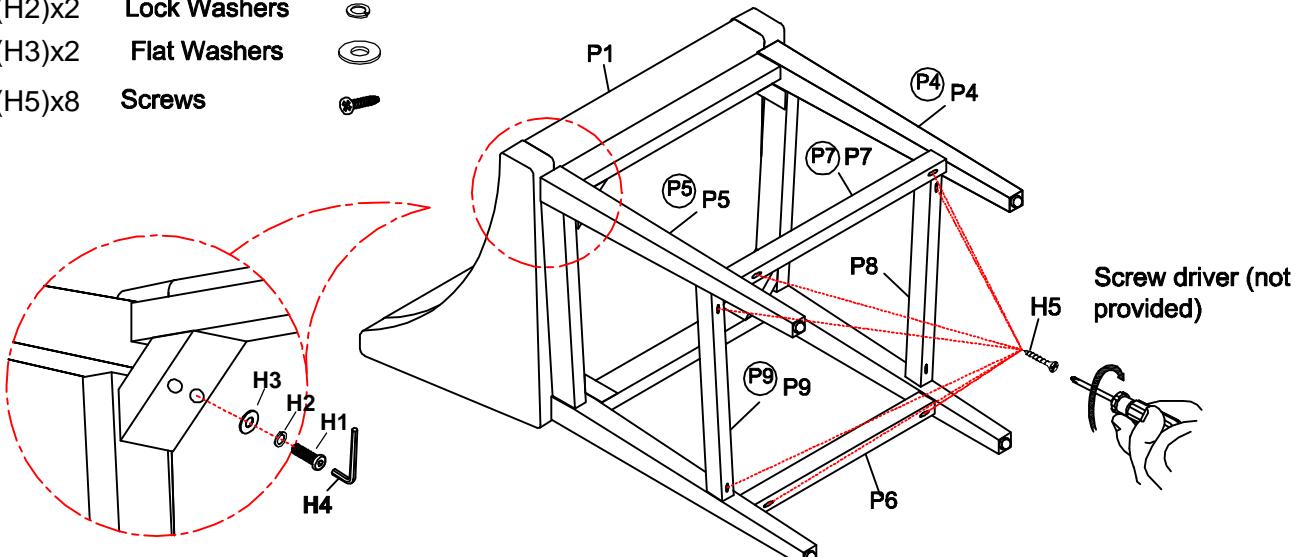

**ADDITIONAL NOTE ABOUT SAFETY:** BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase