

ASSEMBLY INSTRUCTIONS

Description: Cirque X Coffee Table


Important safety instructions:

- Please carefully read all instructions before assembling.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description		QTY
P1	Table top		1
P2	Bottom Panel		1
P3	"X" crossing rail		2
P4	Legs-1	 (P4)	2
P5	Legs-2	 (P5)	2

Hardware List

Item	Description		QTY
H1	Socket Head Bolts Ø1/4"x1/2"L		4
H2	Countersunk Bolts Ø1/4"x5/8"L		8
H3	lock Washers 1/4"		4
H4	Flat Washers 1/4"		4
H5	Allen Wrench 1/4"		1
H6	Nuts 1/4"		8
H7	Open Wrench 1/4"		1
H8	Levelers		4


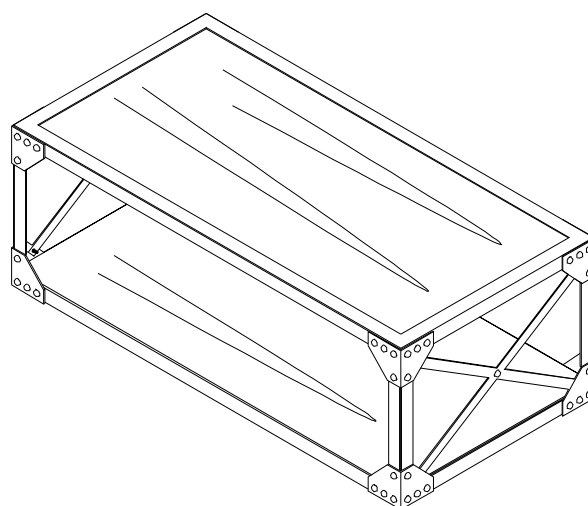
**Assembly Procedures:**

Step 1. Assemble the table on a flat, soft surface such as a carpet or cloth to prevent scratching the finish.

Loosely attach "X" crossing rails (P3) to Legs-1 (P4) and legs-2 (P5) according to the labels "P4", "P5" each leg using bolts (H6) as shown below. Repeat this step for other side frame.


(H6)x8 Nuts

(H7)x1 Open Wrench

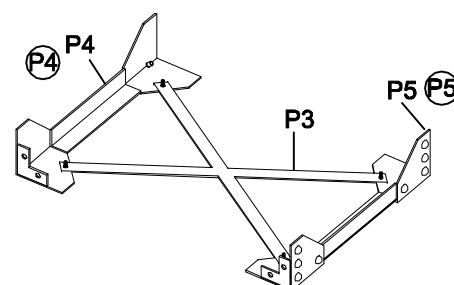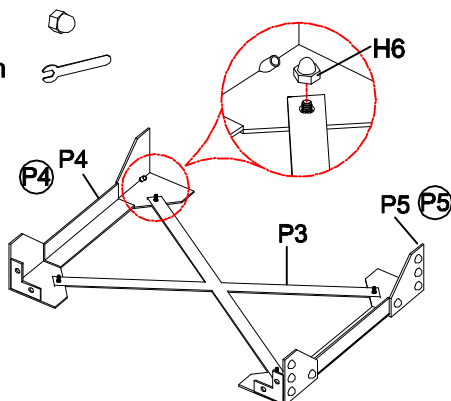


Step 2. Loosely attach the top panel (P1) to one of assembled side frame (P3, P4, P5) using bolts (H1), lock washers (H3) and flat washers (H4) as shown below.

- (H1)x2 **Socket Head Bolts**  
- (H3)x2 **lock Washers** 
- (H4)x2 **Flat Washers** 
- (H5)x1 **Allen Wrench** 

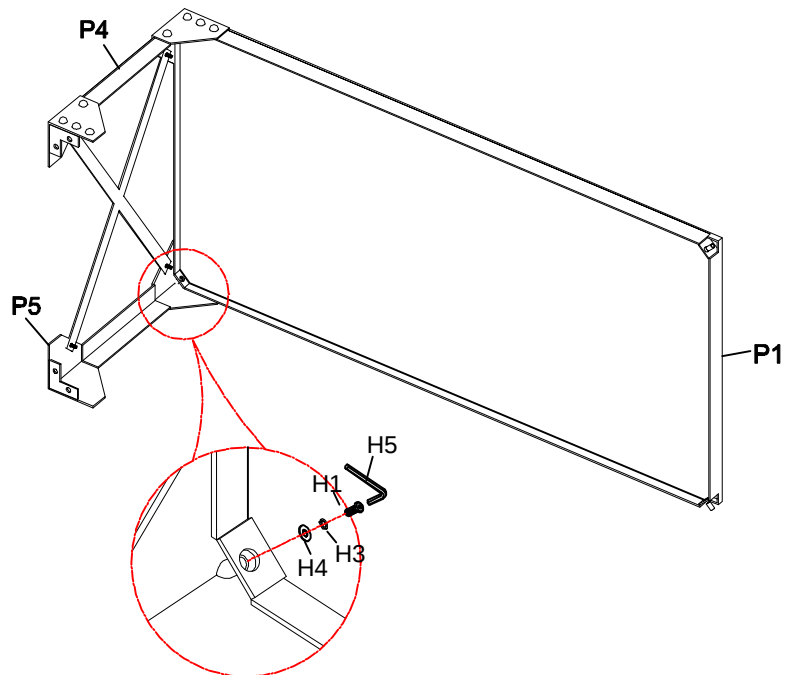


Step 3. Loosely attach the bottom panel (P2) to the assembled side frame (P3, P4, P5) using bolts (H2) as shown below.

- (H2)x4 **Countersunk Bolts**  
- (H5)x4 **Allen Wrench** 

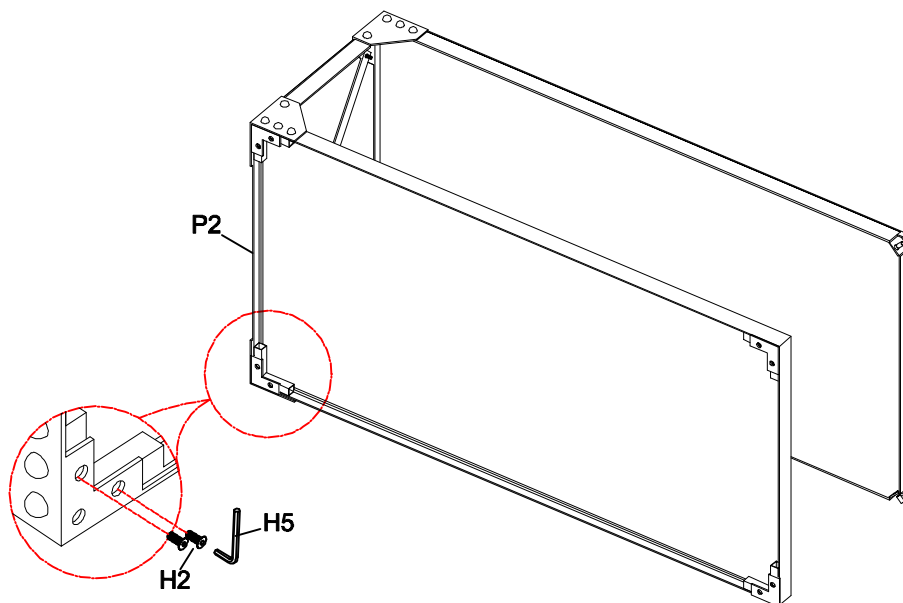

Step 4. Attach the other assembled side frame (P3,P4, P5) to top panel (P1) and bottom panel (P2) using bolts (H1&H2), lock washers (H3) and flat washers (H4) as shown below.


- (H1)x2 **Socket Head Bolts** 
 (H2)x4 **Countersunk Bolts** 
 (H3)x2 **lock Washers** 
 (H4)x2 **Flat Washers** 

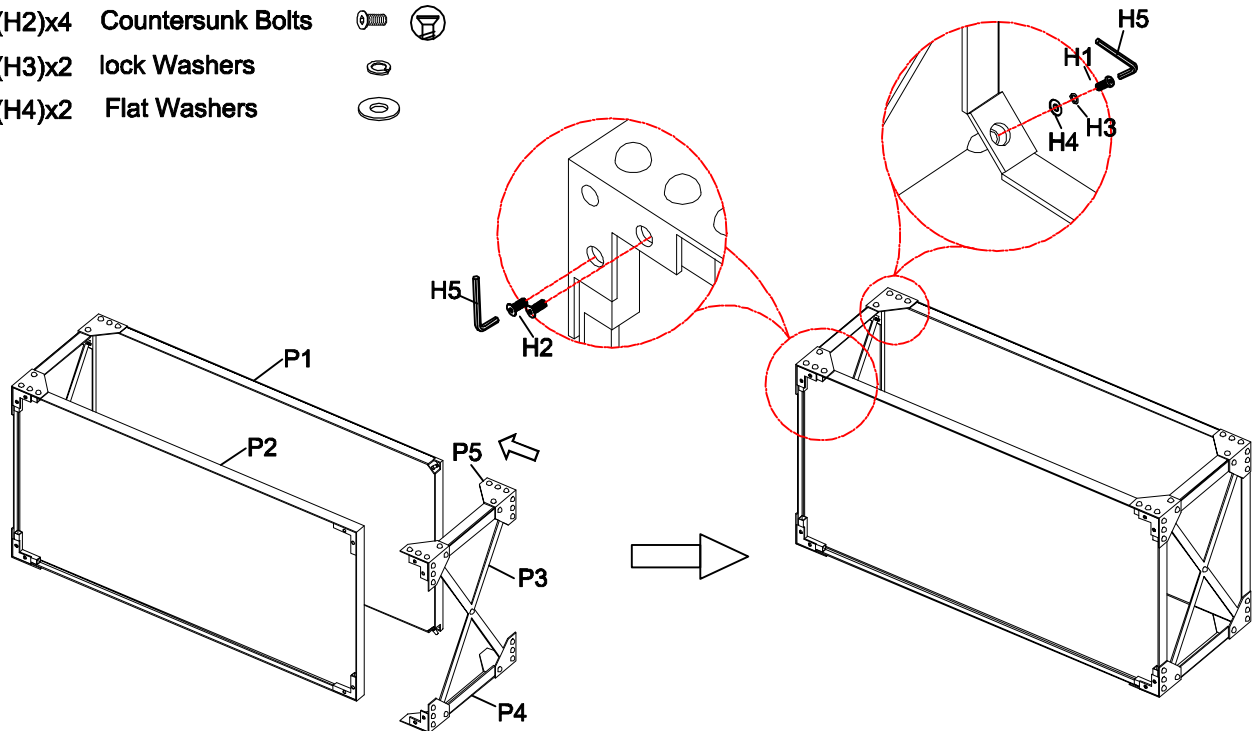

Step 5.

- 1) Attach levelers (H8) to the holes on each bottom of leg. **Leveler adjustment:** Leveler adjust as needed to make sure the table is level.
- 2) Make sure the table is level and securely tighten all the bolts with Allen wrench (H5).
- 3) Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

- (H8)x4 **Levelers**  4

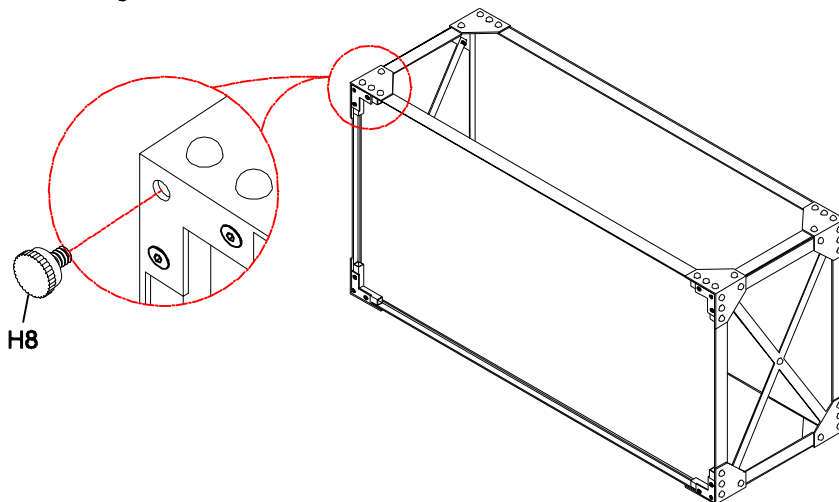

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase