

ASSEMBLY INSTRUCTIONS

Description: Lexi Dining Table





Important safety instructions:

- Please carefully read all instructions before assembling.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.







Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

| Item | Description | | QTY |
|------|----------------|---|-----|
| P1 | Table Top |  | 1 |
| P2 | Post |  | 1 |
| P3 | Mounting Plate |  | 1 |
| P4 | Base |  | 1 |


Hardware List

| Item | Description | | QTY |
|------|---------------------|---|-----|
| H1 | Bolt Ø5/16"×1-1/4"L |  | 4 |
| H2 | Lock Washer 5/16" |  | 10 |
| H3 | Flat washer 5/16" |  | 10 |
| H4 | Nut 5/16" |  | 6 |
| H5 | Open Wrench |  | 1 |
| H6 | Allen Wrench 5/16" |  | 1 |

Assembly Procedures:

Step 1. Attach mounting plate (P3) to the post (P2) as shown below image 1. Securely tighten the nuts.

- (H4)x3 Nut 5/16" 
- (H2)x3 Lock Washers 5/16" 
- (H3)x3 Flat washers 5/16" 
- (H5)x1 Open Wrench 

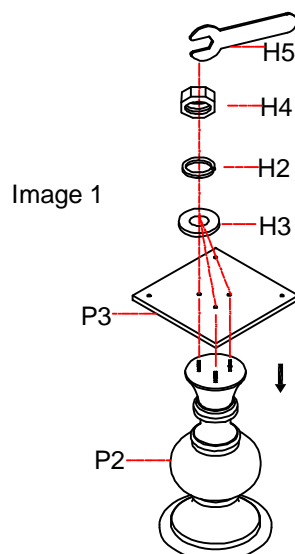

Assembly Procedures:

Step 2. Attach the base (P4) to the assemble post (P2) as shown below image 2. Securely tighten the nuts.

- | | | |
|--------|--------------------|---|
| (H4)x3 | Nut 5/16" |  |
| (H2)x3 | Lock Washers 5/16" |  |
| (H3)x3 | Flat washers 5/16" |  |
| (H5)x1 | Open Wrench |  |

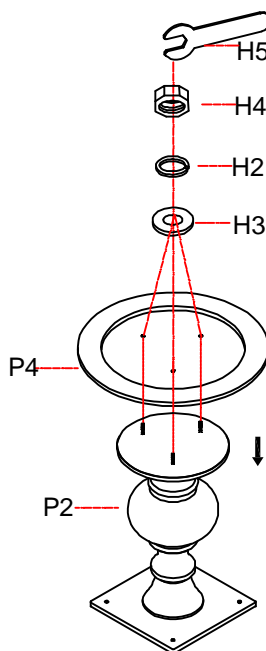


Image 2

Step 3.

1) Turn over the table top (P1) on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the assembled mounting plate (P3) to the bottom of table top (P1) as shown below image3.

2) Securely tighten all bolts, then turn the assembled table to an upright position. Assembly is complete.

Failure to follow these instructions may cause the bolts to misalign during assembly.

- | | | |
|--------|---------------------|---|
| (H1)x4 | Bolt Ø5/16"*1-1/4"L |  |
| (H2)x4 | Lock Washers 5/16" |  |
| (H3)x4 | Flat washers 5/16" |  |
| (H6)x1 | Allen Wrench 5/16" |  |

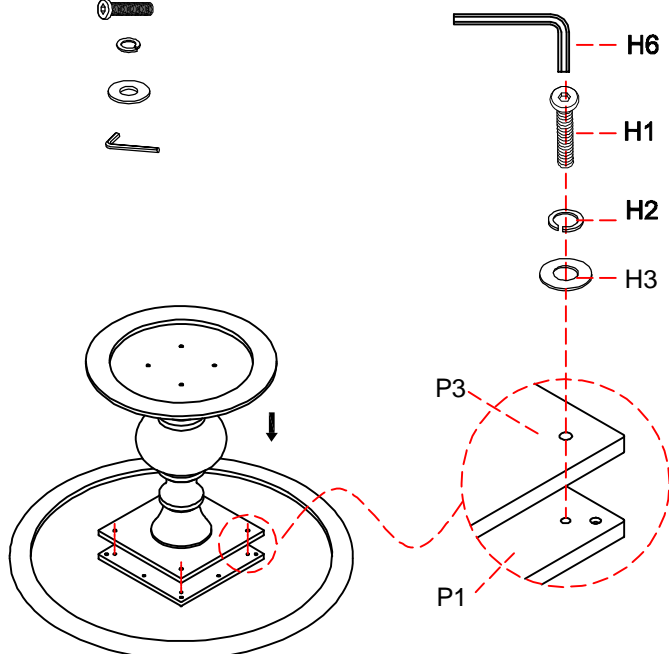


Image 3

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase