















# MADISON **PARK**

## Assembly Instruction---Danielle Chaise Lounge


PARTS #	PARTS NAME	DRAWING	QTY
P1	Armrest		2
P2	Seat		1
P3	Back		1
P4	Foot rest		1
P5	Leg		2
P6	Studdle		1
P7	Seat cushion		1

Hardware#	PARTS NAME	DRAWING	QTY
H1	Bolts		4
H2	Bolts		12
H3	Bolts		2
H4	PE Washers		2
H5	Metal Washers		18
H6	Allen Wrench		1


**Step 1. Turn the foot rest (P4) over and attach the legs (P5) to the foot rest bottom frame by using bolts (H2) and metal washers (H5), securely tighten all bolts with Allen Wrench (H6).**

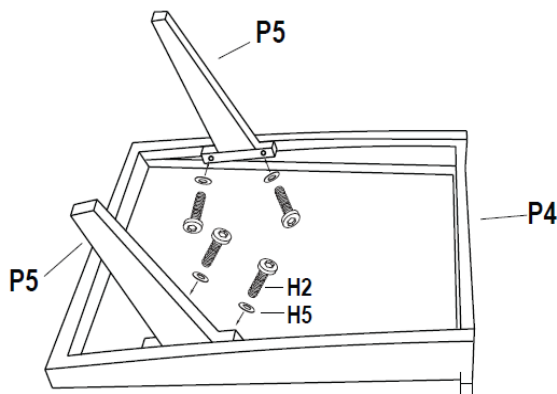

**Step 2 .Turn back seat (P2) to the bottom,and lock the P1 on P2 with H2 and H5 .**

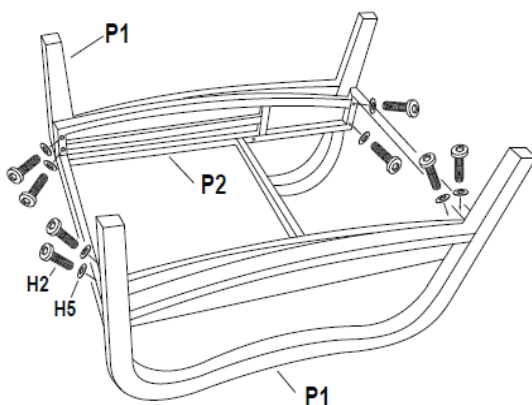

**Step 3. At first push P4 into A place from P2 seat back hold, and push to the front, then screwing P6 using metal washers(H5) and Bolts (H1)**

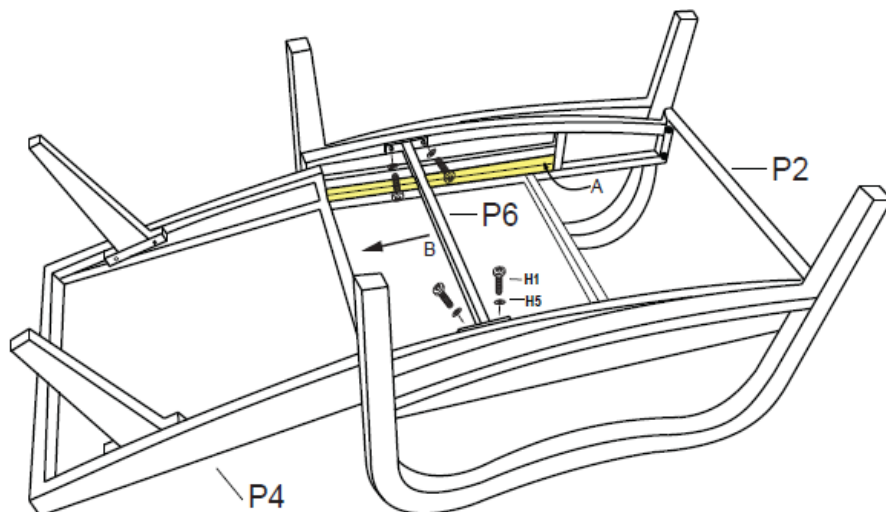

**Step 4. Fix the back(P3) to the seat (P2) by using metal washers(H5) and bolts (H3) . Then place the cushion(P7) on and upright on a level surface.**

