

ASSEMBLY INSTRUCTIONS

Description: Lounge

Important safety instructions:


- Please carefully read all instructions before assembling.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:

- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description		QTY
A	Back Cushion		1
B	Seat Cushion		1
C	Right Leg	 	1
D	Left Leg	 	1
E	Back Top Rail	 	1
F	Back Stretcher	 	1

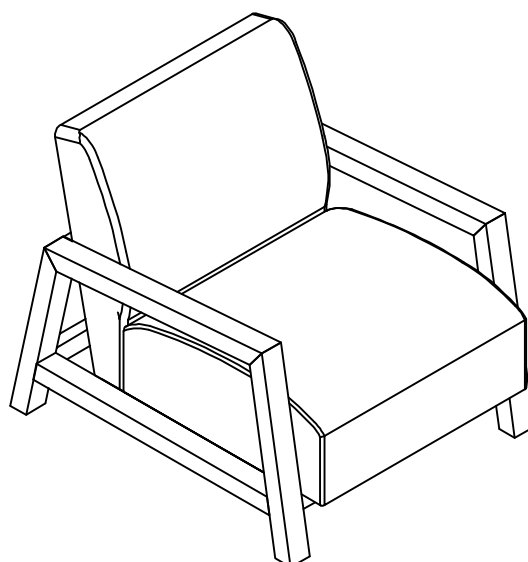


Hardware List

Item	Description		QTY
a	Bolts Ø5/16"*1-3/4"		2
b	Bolts Ø5/16"*2"		4
c	Lock Washers 5/16"		6
d	Flat Washers 5/16"(22mm)		6
e	Allen Wrench 5/16"		1
f	Bolts Ø1/4"*5/8"		8
g	Lock Washers 1/4"		8
h	Flat Washers 1/4"(19mm)		8
i	Allen Wrench 1/4"		1
j	"L" Bracket		4

Assembly Procedures:


Step 1. Assemble the lounge on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Open the bottom covering of seat cushion (B), then attach the seat cushion (B) to the back cushion (A) as shown below. Securely tighten all bolts with Allen wrench (e).

- (a)x2 Bolts $\varnothing 5/16"$ *1-3/4" 
- (c)x2 Lock Washers 5/16" 
- (d)x2 Flat Washers 5/16"(22mm) 
- (e)x2 Allen Wrench 5/16" 

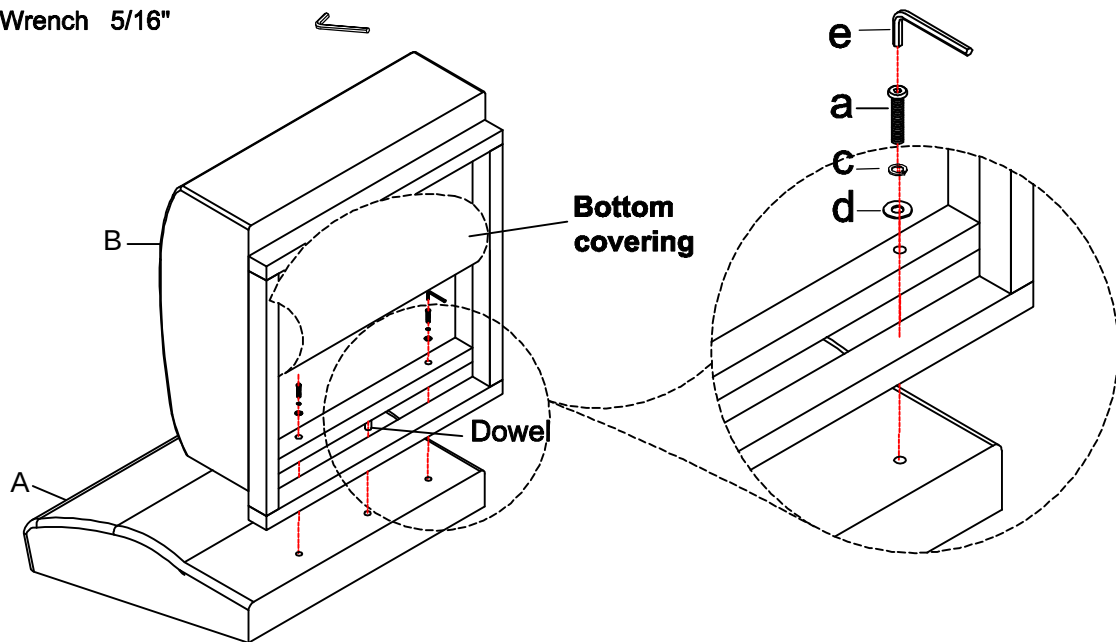

Step 2. Attach left leg (D) to the assembled back cushion (A) and seat cushion (B) according to the label "D" on the right leg as shown below. Securely tighten the bolts with Allen wrench (e).

- (b)x2 Bolts $\varnothing 5/16"$ * 2" 
- (c)x2 Lock Washers 5/16" 
- (d)x2 Flat Washers 5/16"(22mm) 

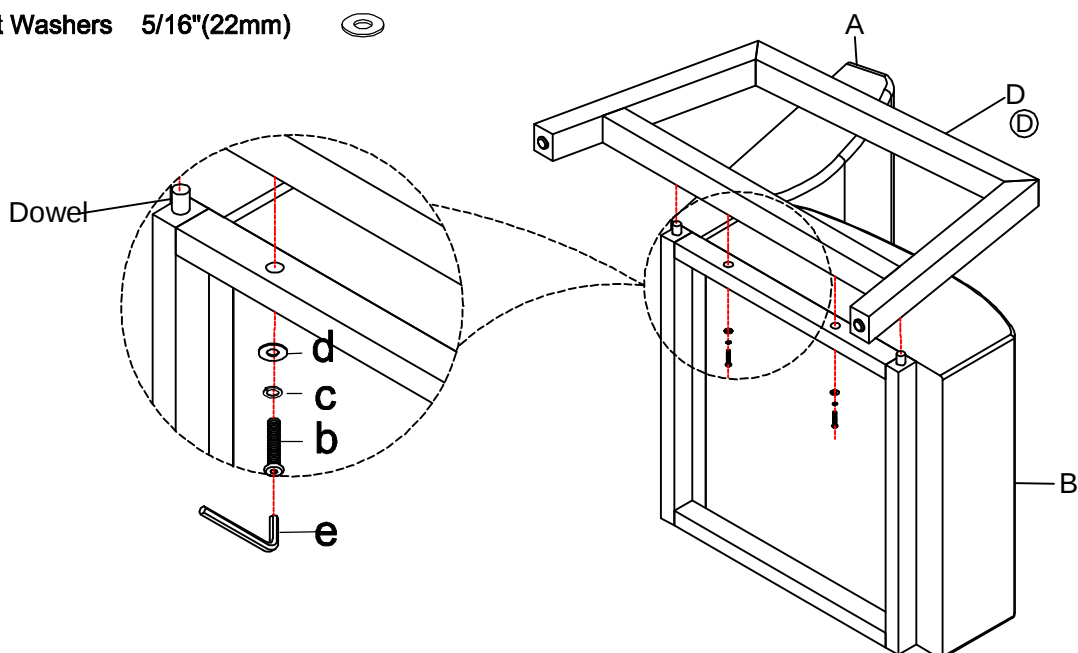

Step 3.


1) Insert back top rail (E) and back stretcher (F) to the left leg (D) according to the label "E" and "F" on the back top rail and back stretcher.

2) Loosely Attach right leg (C) to the assembled back cushion (A), seat cushion (B), back top rail (E) and back stretcher (F) according to the label "C" on the right leg as shown below. Securely tighten all bolts with Allen wrench (e).

(b)x2 Bolts $\varnothing 5/16'' \times 2''$

(c)x2 Lock Washers $5/16''$

(d)x2 Flat Washers $5/16'' (22\text{mm})$

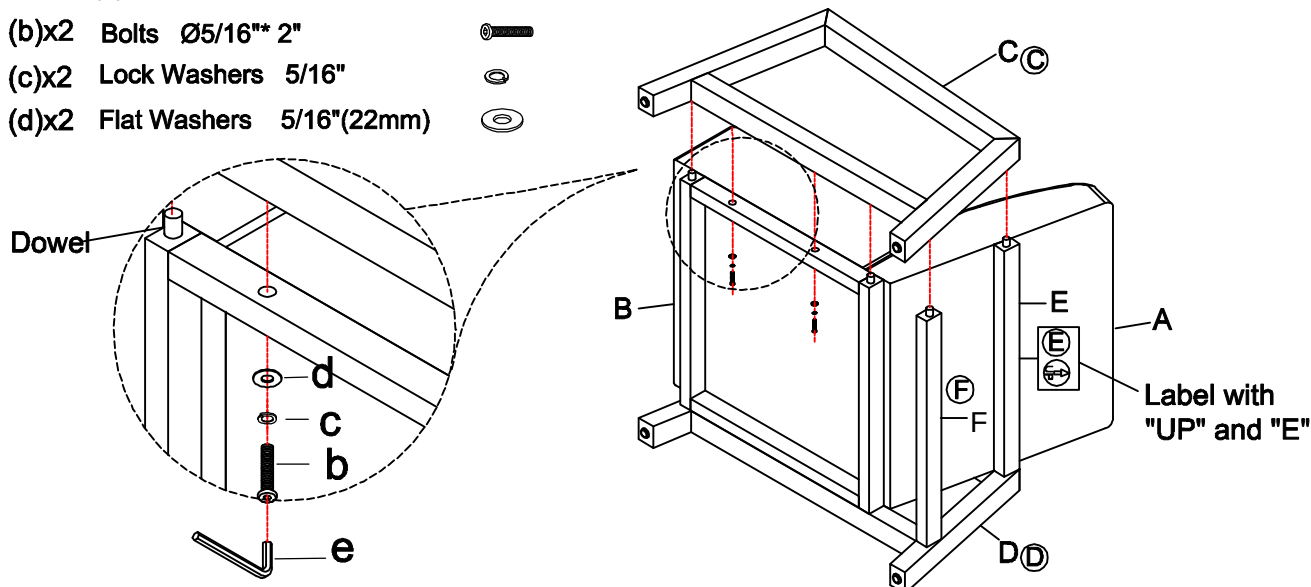

Step 4.

1) Attach "L" Bracket (j) to the back top rail (E), back stretcher (F), right leg (C) and left leg (D) as shown below.

2) Securely tighten the bolts with Allen wrench (i).

3) Turn the assembled lounge to an upright position. Assembly is complete.


(f)x8 Bolts $\varnothing 1/4'' \times 5/8''$

(g)x8 Lock Washers $1/4''$

(h)x8 Flat Washers $1/4'' (19\text{mm})$

(i)x1 Allen Wrench $1/4''$

(j)x4 "L" Bracket

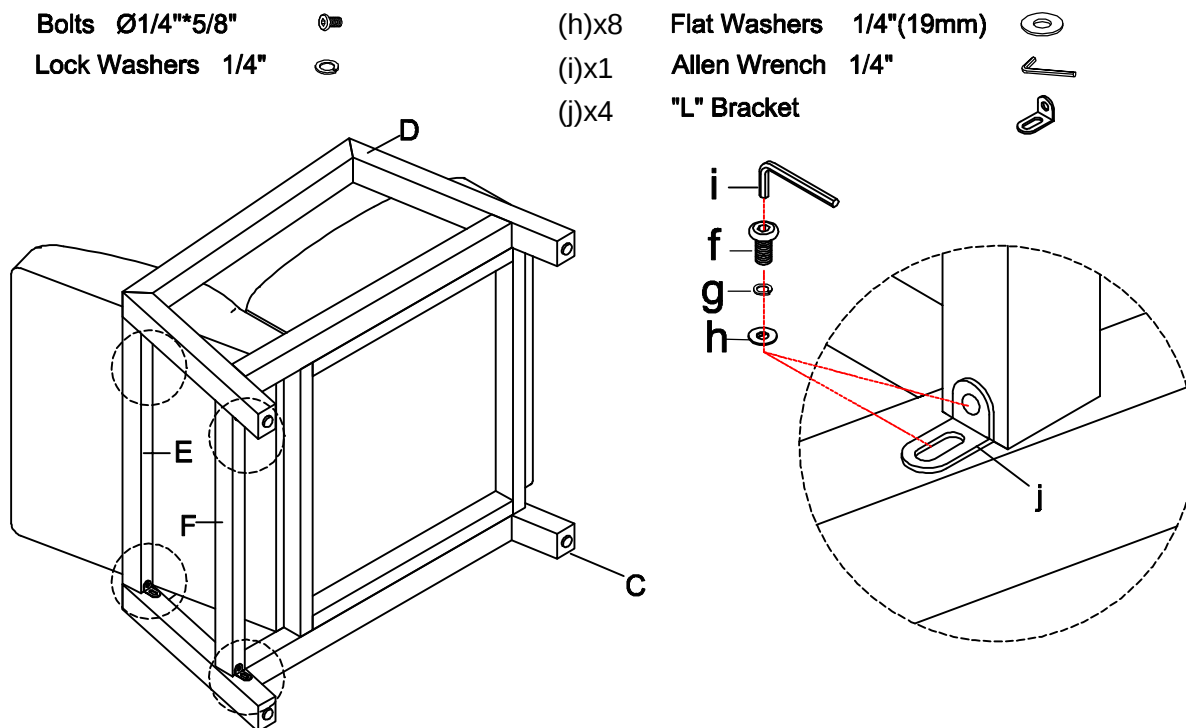

Caution: Failure to follow these instructions may cause the bolts to misalign during assembly.

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase