




Assembly Instruction--Accent Chair


PARTS #	PARTS NAME	DRAWING	QTY
P1	FRONT LEGS		2
P2	LEFT BACK LEG		1
P3	RIGHT BACK LEG		1
P4	CHAIR		1
P5	SEAT CUSHION		1

Hardware#	PARTS NAME	DRAWING	QTY
H1	Bolts φ5/16*1"		12
H2	Lock Washers φ5/16"		12
H3	Flat Washers φ5/16"		12
H4	Allen Wrench φ1/4"		1


1. Lift the seat cushion and take out the legs/hardware underneath the seat cushion.

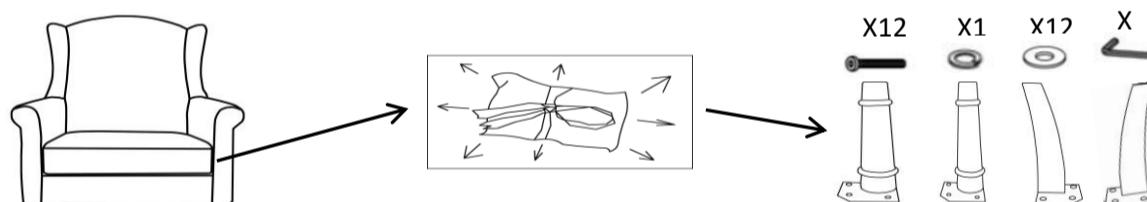

2. Turn over the chair and lay on protective carpet, using bolts (H1), lock washers (H2), flat washers (H3), connect legs(P1,P2,P3) to chair (P4). Tighten bolts (H1) with Allen Wrench (H4).

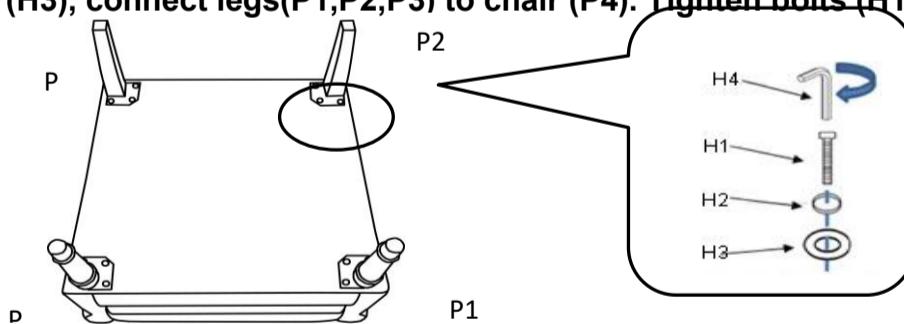

3. Place the chair upright on a level surface, put the seat cushion (P5) on it.
Assemble is complete.



ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.