








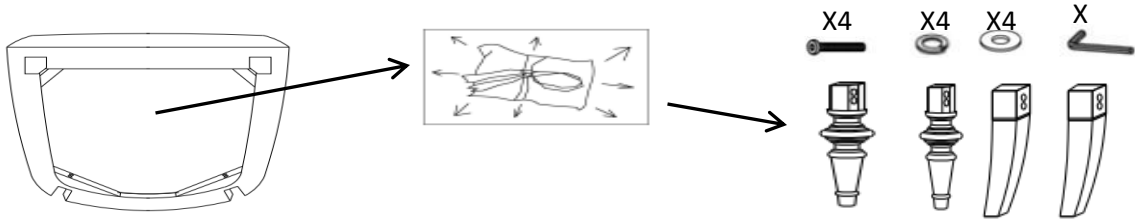


Assembly Instruction--Accent Chair


PARTS #	PARTS NAME	DRAWING	QTY
P1	FRONT LEGS		2
P2	BACK LEGS		2
P3	Chair		1

Hardware#	PARTS NAME	DRAWING	QTY
H1	Bolts φ5/16*2"		8
H2	Lock Washers φ5/16"		8
H3	Flat Washers φ5/16"		8
H4	Allen Wrench φ1/4"		1

1. Turn the chair upside down and lay on protective carpet, open the black fabric on bottom and take the legs and hardwares .



2. Using bolts (H1), lock washers (H2), flat washers (H3), connect legs(P1,P2) to chair (P3). Tighten bolts (H1) with Allen Wrench (H4). Close the black fabric on bottom.

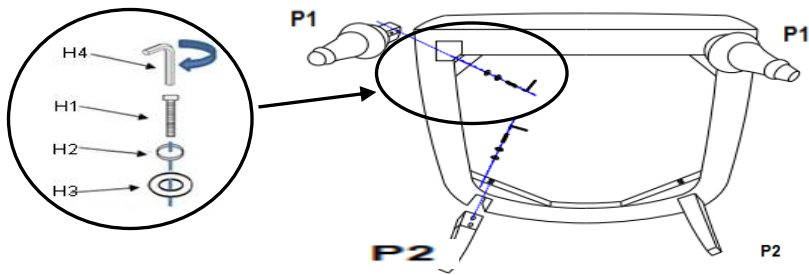

3. Place the chair upright on a level surface, Assemble is complete.

