









Assembly Instruction--Accent Chair


PARTS #	PARTS NAME	DRAWING	QTY
P1	FRONT LEGS		2
P2	BACK LEGS		2
P3	CHAIR		1

Hardware#	PARTS NAME	DRAWING	QTY
H1	Bolts φ5/16*2"		8
H2	Lock Washers φ5/16"		8
H3	Flat Washers φ5/16"		8
H4	Allen Wrench φ1/4"		1

1. Turn the chair upside down and lay on protective carpet, then take the legs and hardware package from the zipper pocket on bottom .

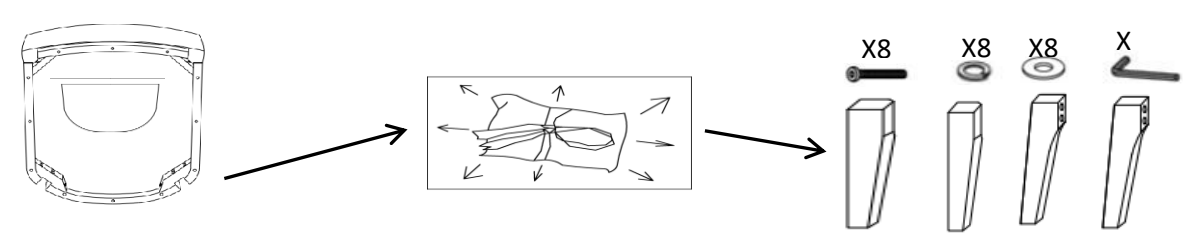

2. Using bolts (H1), lock washers (H2), flat washers (H3), connect legs(P1,P2) to chair (P3). Tighten bolts (H1) with Allen Wrench (H4).

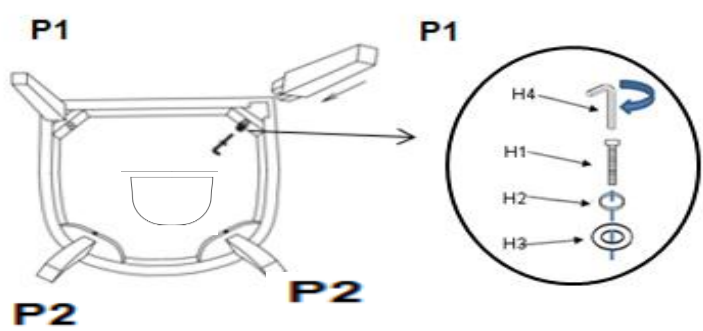

3. Place the chair upright on a level surface, Assemble is complete.

