



ASSEMBLY INSTRUCTIONS

Description: Felicia Loveseat






Important safety instructions:

- Please carefully read all instructions before assembling.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

Item	Description		QTY
P1	Seat Cushion		1
P2	Back cushion		1
P3	Front Legs		2
P4	Back Right Leg	 (P4)	1
P5	Back Left Leg	 (P5)	1

Hardware List



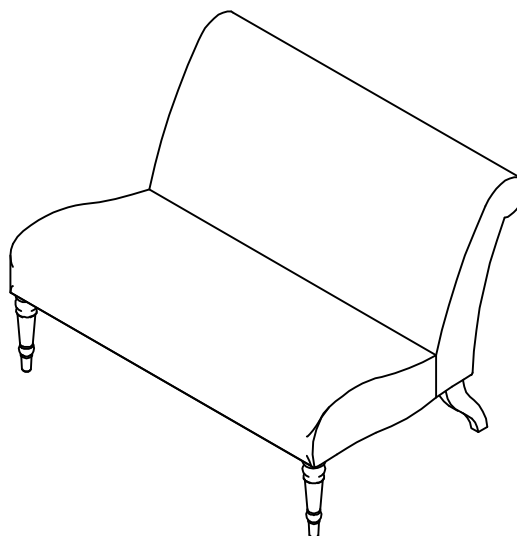

Item	Description		QTY
H1	Short Bolts	Ø5/16"×2"	4
H2	Long Bolts	Ø5/16"×2-1/4"	12
H3	Lock Washers	5/16"	16
H4	Flat Washers	5/16"	16
H5	Allen Wrench	5/16"	1




Assembly Procedures:

Step 1. Assemble the loveseat on a flat, soft surface such as a carpet or cloth to prevent scratching the finish.



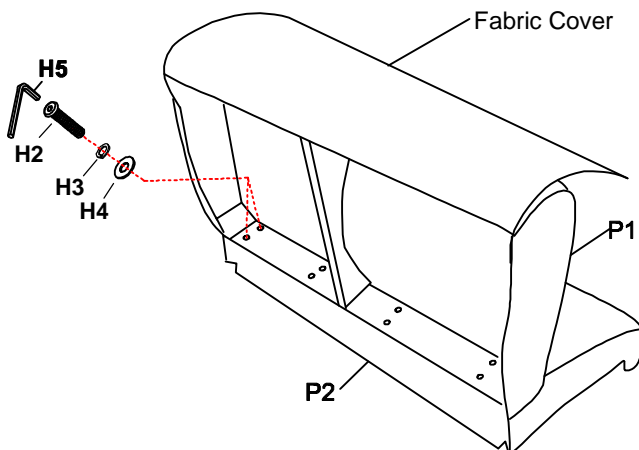


- 1) Open the fabric cover at the bottom of the seat cushion (P1).
- 2) Attach the seat cushion (P1) to the back cushion (P2) using long bolts (H2), lock washers (H3) and flat washers (H4) as shown below.


- (H2)x8 Long Bolts 
- (H3)x8 Lock Washers 
- (H4)x8 Flat Washers 
- (H5)x1 Allen Wrench 



Step 2.

1) Loosely attach the front legs (P3) to the seat cushion (P1) using long bolt (H2), lock washer (H3), flat washer (H4) and loosely attach the back legs (P4 & P5) to the seat cushion (P1) using short bolt (H1), lock washer (H3), flat washer (H4) as shown below.

(H1)x4	Short Bolts	
(H2)x4	Long Bolts	
(H3)x8	Lock Washers	
(H4)x8	Flat Washers	
(H5)x1	Allen Wrench	

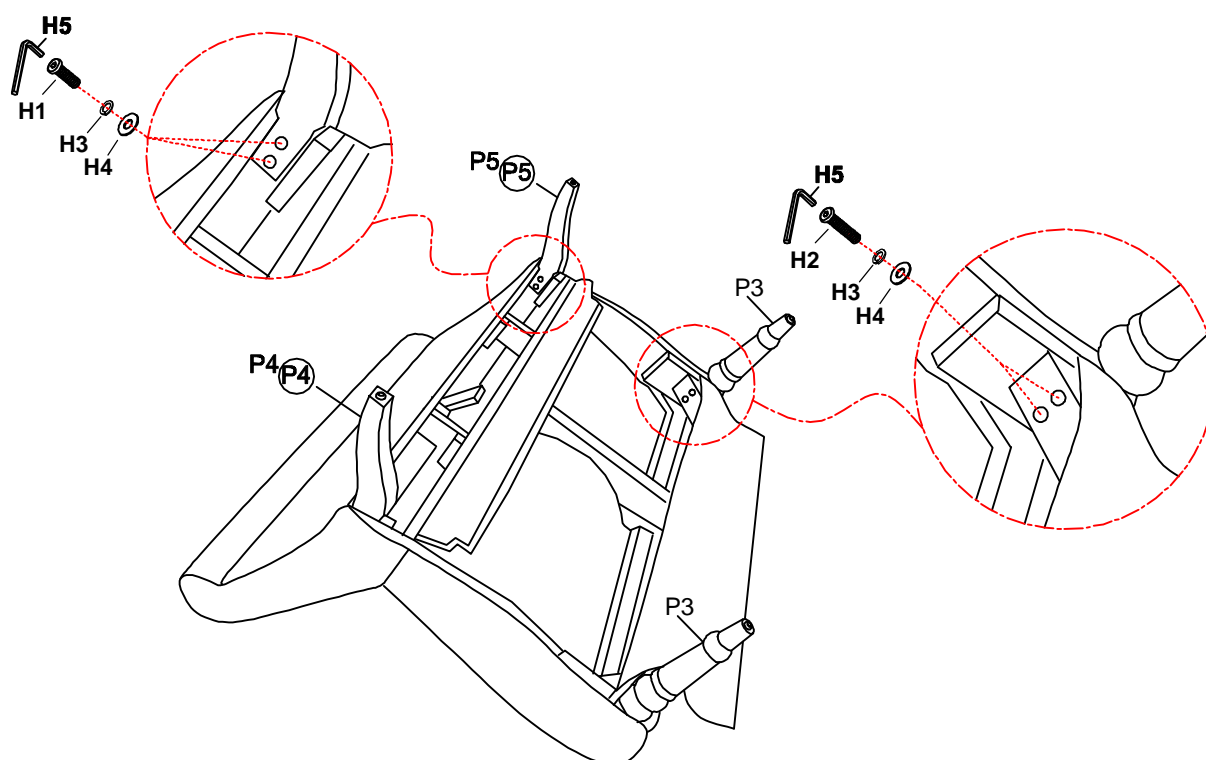

2) Turn the assembled loveseat to an upright position. Make sure the loveseat is level and securely tighten all bolts with Allen wrench (H5). Close the fabric cover at the bottom of seat cushion (P1).

3) Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase