



# ASSEMBLY INSTRUCTIONS

Description: Caroline Coffee Table

## Important safety instructions:

- Please read carefully all instructions before assembly.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

## Pre-assembly:

- Do not discard any content until assembly is complete to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardware from box.

## Parts List

Item	Description	QTY
P1	Glass Top	1
P2	Shelf	1
P3	Long Leg Frame	1
P4	Short Leg Frame	2
P5	Connecting Metal Plate	2

## Hardware List

Item	Description	QTY
H1	Bolts 1/4"x 3/5"	16
H2	Lock Washers 1/4"	16
H3	Flat Washers 1/4" *16*1.5mm	16
H4	Allen Wrench(60*25*4mm)	1
H5	White self-adhesive gasket ( $\Phi 10*2mm$ )	10

## DISCLAIMER:

WHEN PROPERLY ASSEMBLED, THIS ITEM IS SAFE FOR INTENDED USE. SELLER IS NOT LIABLE FOR ANY DAMAGES RESULTING FROM ITEM BEING IMPROPERLY ASSEMBLED AFTER PURCHASE.


**Step 1:** Assemble the table on a flat and soft surface either on a carpet or cloth to prevent the finishing from scratching. Assemble Connecting Metal Plate (P5) to Long Leg Frame (P3) and 1PC Short Leg Frame (P4) as shown below:

(H1)x12 Bolts 1/4"x 3/5"

(H2)x12 Lock Washers 1/4"



(H3)x12 Flat Washers 1/4"

(H4)x1 Allen Wrench

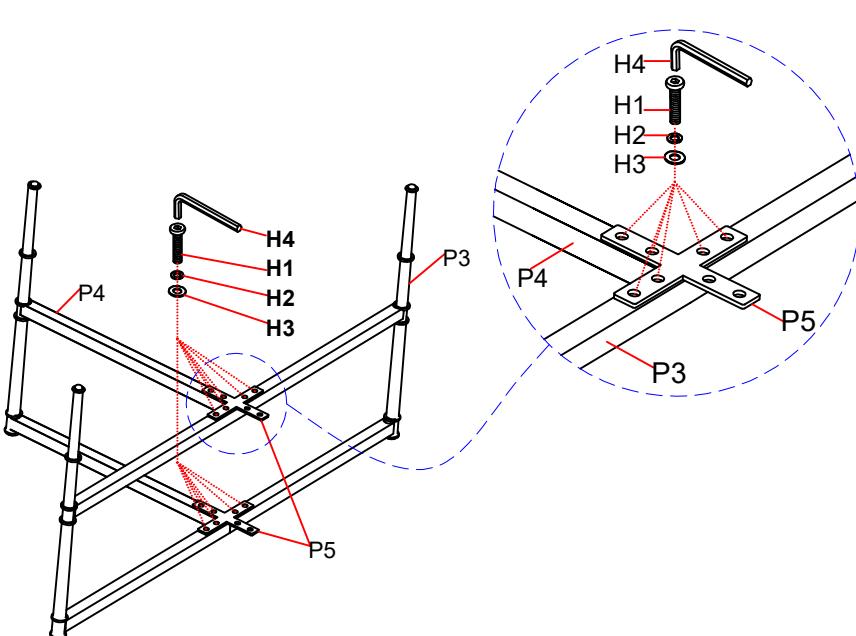


**Step 2:** Place a soft fabric or paper board at Position 1 to prevent the finishing from scratching and put the Shelf (P2) into this position (If Customer would like use Glass Top as a shelf, just replace the Glass Top with the shelf in this Step), then assemble the second Short Leg Frame (P4) to Connecting Metal Plate (P5) at Position 2 as shown below:

- (H1)x2 Bolts 1/4"x 3/5" 
- (H2)x2 Lock Washers 1/4" 
- (H3)x2 Flat Washers 1/4" 
- (H4)x1 Allen Wrench 

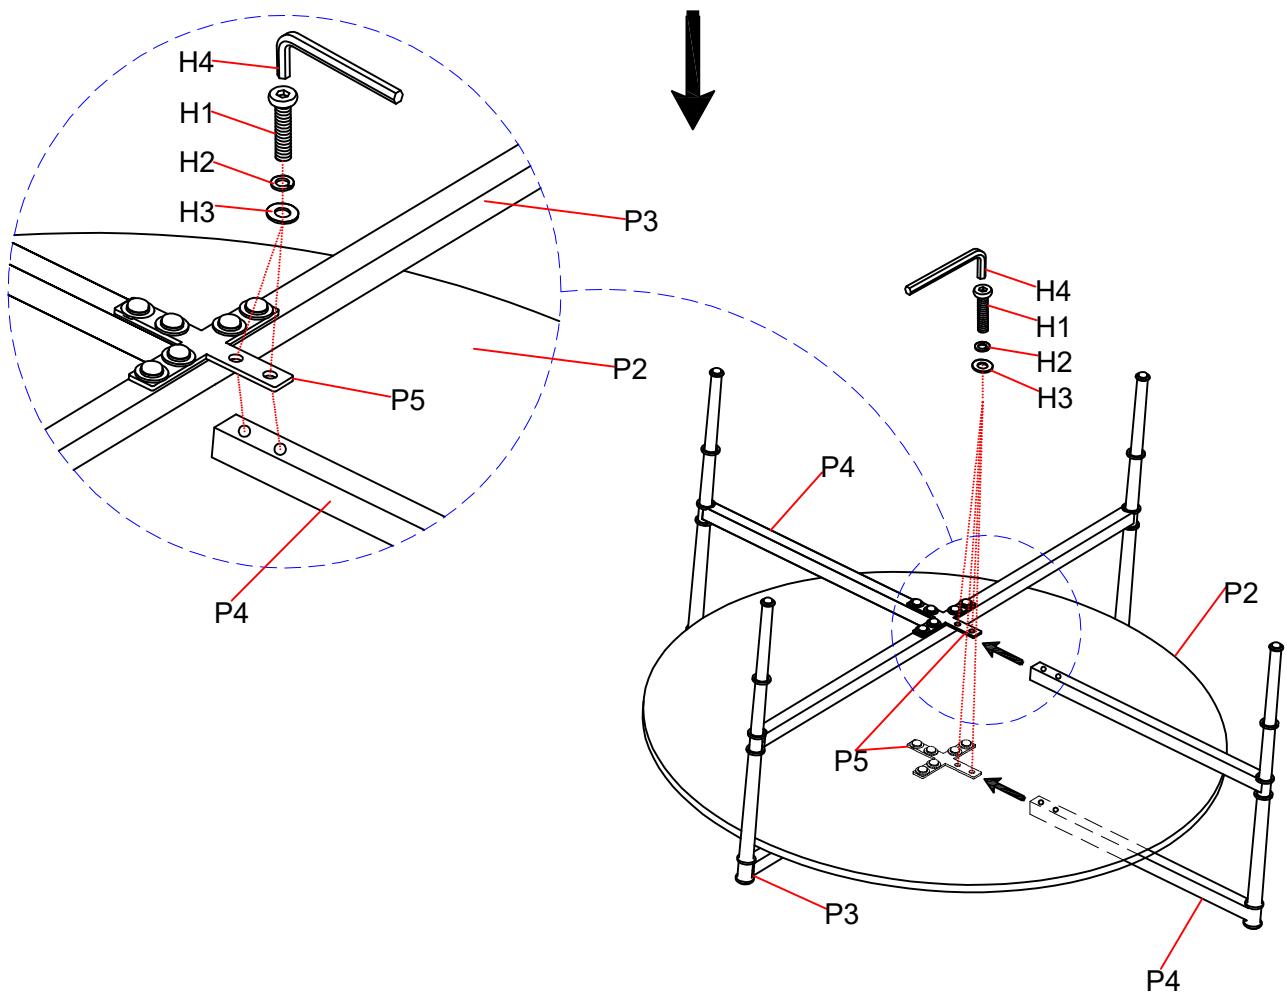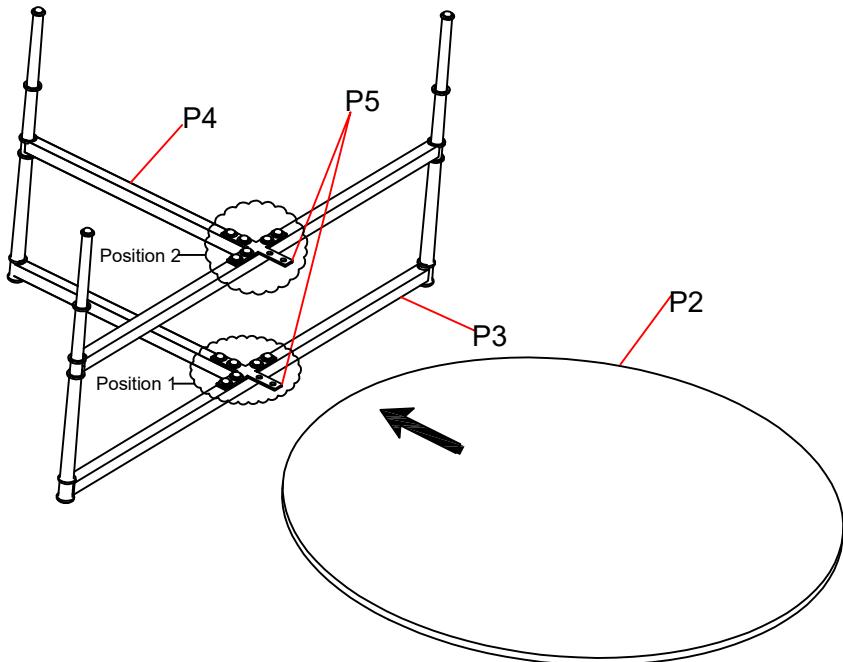


**Step 3:** Turn over the assembled frame (Assemble by two adults in this step), assemble the second Short Leg Frame (P4) to Connecting Metal Plate (P5) at Position 1 as shown in Step 2, attach white self-adhesive gasket (H5) to the frame as shown below and then put Glass Top (P1) on it.

(H1)x2	Bolts 1/4"x 3/5"	
(H2)x2	Lock Washers 1/4"	
(H3)x2	Flat Washers 1/4"	
(H4)x1	Allen Wrench	
(H5)x10	White self-adhesive gasket $\Phi 10 \times 2 \text{mm}$	

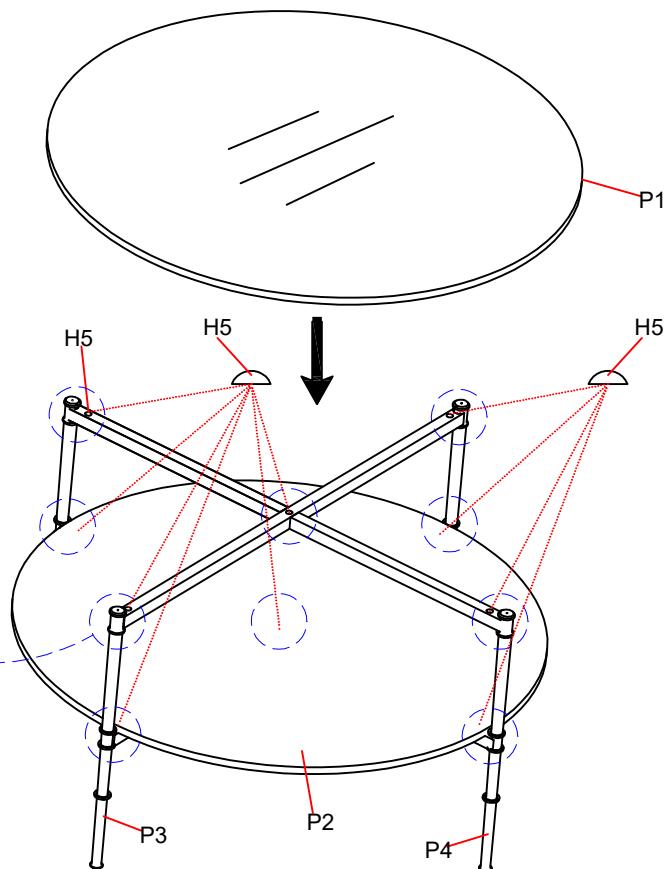

**Step 4:** Assembly is now complete.

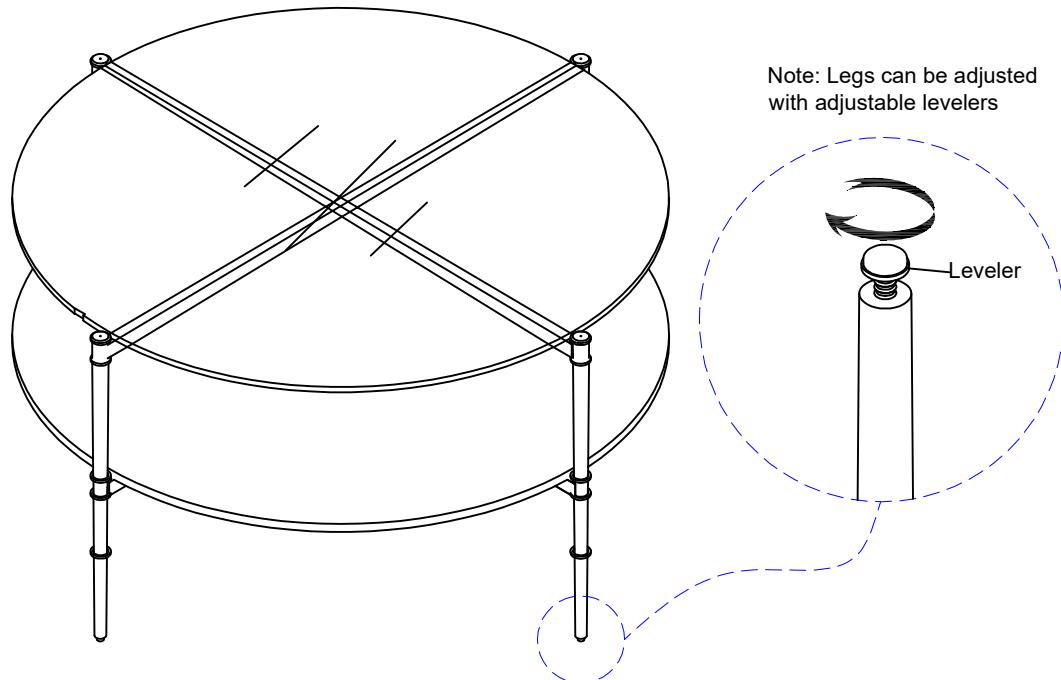

**ADDITIONAL NOTE ABOUT SAFETY:** BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO ENSURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase