

ASSEMBLY INSTRUCTIONS

Description: Obsidian Dining side chair**Important safety instructions:**

- Please carefully read all instructions before assembling.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

Parts List

| Item | Description | QTY |
|------|--------------|-----|
| P1 | Chair Back | 1 |
| P2 | Seat Cushion | 1 |
| P3 | Left leg | 1 |
| P4 | Right Leg | 1 |

Hardware List

| Item | Description | QTY |
|------|------------------------------------|-----|
| H1 | Countersunk bolts Ø1/4" * 1 1/2" L | 4 |
| H2 | Short Bolts Ø1/4" * 5/8" L | 4 |
| H3 | Long Bolts Ø1/4" * 1 1/4" L | 2 |
| H4 | Lock Washers 1/4" | 6 |
| H5 | Flat Washers 1/4" | 6 |
| H6 | Allen Wrench 1/4 | 1 |

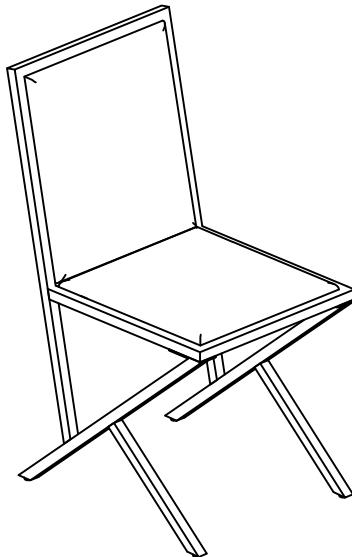**Assembly Procedures:**


Step 1. Assemble the chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Loosely attach seat cushion (P2) to the chair back (P1) as shown below.

(H2)x4 Short Bolts Ø1/4" * 5/8" L

(H4)x4 Lock Washers 1/4"

(H5)x4 Flat Washers 1/4"

(H6)x1 Allen Wrench 1/4

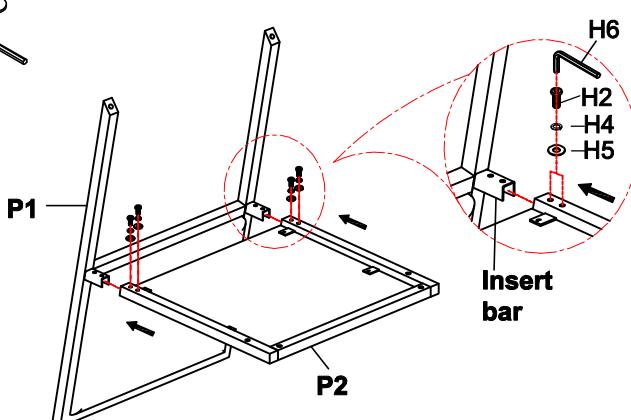

Step 2. Loosely attach the left leg (P3) and right leg (P4) to the chair back (P1) and bottom of seat cushion (P2) following the labels "P3" "P4" on the legs and bottom of seat frame (P2) accordingly as shown below.

(H1)x4 Countersunk bolts Ø1/4" * 1/2" L




(H3)x2 Long Bolts Ø1/4" * 1 1/4" L



(H4)x2 Lock Washers 1/4"




(H5)x2 Flat Washers 1/4"

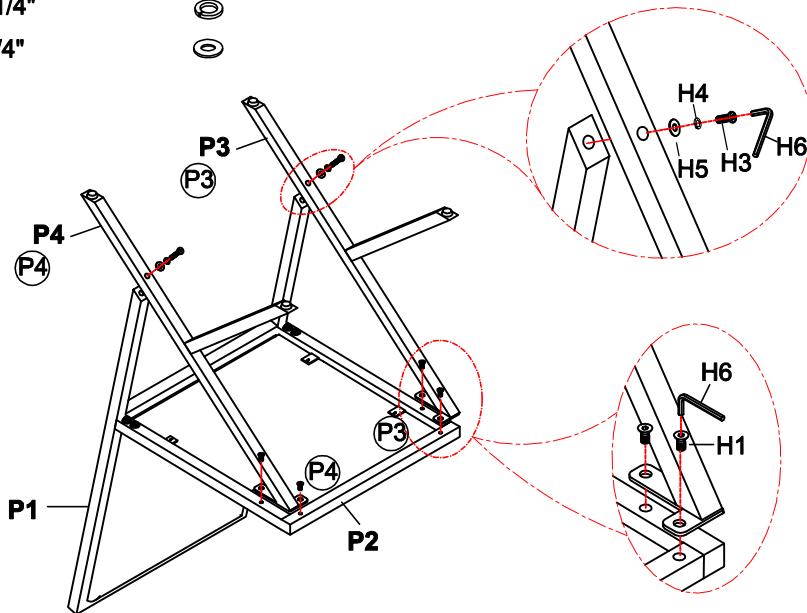

Step 3.

- 1) Turn the assembled chair to an upright position. Make sure the chair is level and securely tighten all bolts with Allen wrench (H6).
- 2) **Leveler adjustment:** Leveler are installed on the legs and adjust as needed to make sure the chair is level. Assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

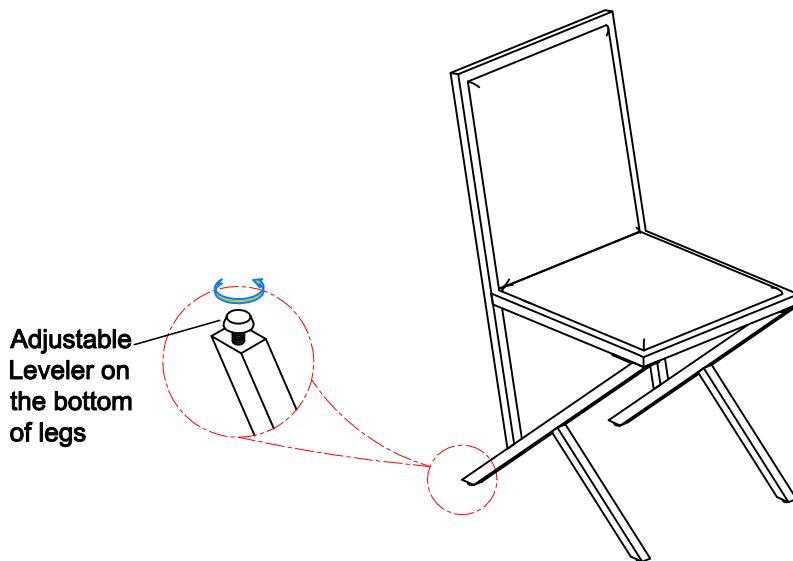

ADDITIONAL NOTE ABOUT SAFETY: BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE. THEY SHOULD BE PERIODICALLY INSPECTED AND RE-TIGHTENED TO PREVENT DAMAGE OR INJURY. ALWAYS CHECK TO BE SURE THAT ALL HARDWARE IS KEPT TIGHTENED.

Thank you for your purchase